


General purpose triaxial accelerometer

993A

SPECIFICATIONS


Sensitivity, $\pm 10\%$, 25°C		100 mV/g
Acceleration range		50 g peak
Amplitude nonlinearity		1%
Frequency response:		
all channels, $\pm 10\%$		2 - 2,000 Hz
Transverse sensitivity, max		5% of axial
Temperature response:	-50°C	+10%
	+25°C	0%
	+80°C	+3%
	+120°C	-7%
Power requirement:		
Voltage source		18 - 30 VDC
Current regulating diode		2 - 10 mA
Electrical noise, equiv. g:		
Broadband	2.5 Hz to 25 kHz	150 μ g
Spectral	10 Hz	20 μ g/ $\sqrt{\text{Hz}}$
	100 Hz	2 μ g/ $\sqrt{\text{Hz}}$
	1,000 Hz	0.6 μ g/ $\sqrt{\text{Hz}}$
Output impedance, max		100 Ω
Bias output voltage		12 VDC
Grounding		case isolated, internally shielded
Temperature range		-50° to +120°C
Vibration limit		500 g peak
Shock limit		5,000 g peak
Electromagnetic sensitivity, equiv. g		100 μ g/gauss
Sealing		epoxy
Base strain sensitivity		0.0005 g/ μ strain
Sensing element design		PZT ceramic / shear
Weight		88 grams
Case material		hardcoated aluminum
Mounting		1/4-28 captive socket head screw
Output connector		4 pin, Bendix PC02A-8-4P
Mating connector		R9W
Recommended cabling		J9T4

Accessories supplied: #11714-09 captive screw; calibration data (level 2)




Key features

- Triaxial measurements provide more data from a single sensor
- Manufactured in ISO 9001 facility

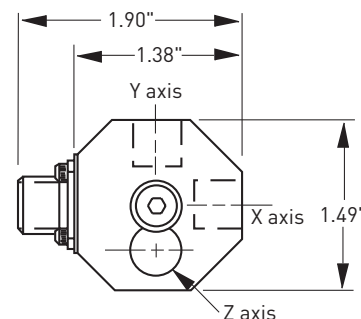

Top view

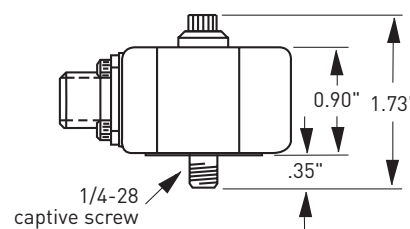

Side View

Connections	
Function	Connector pin
axis Y, power/signal	A
axis X, power/signal	B
axis Z, power/signal	C
common (all channels)	D
N/C	shell



Note: Due to continuous process improvement, specifications are subject to change without notice.
This document is cleared for public release.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru