

MAX17608 Evaluation Kit

Evaluates: MAX17608 – 4.5V to 60V, 1A, OV, UV, Reverse-Voltage Protector with Forward/Reverse Current Limit

General Description

The MAX17608 evaluation kit (EV kit) is a fully assembled and tested circuit board that demonstrates the MAX17608 4.5V to 60V, 1A, OV, UV, reverse-voltage protector with forward/reverse current-limit in a 12-pin TDFN-EP package. The EV kit can be configured to demonstrate adjustable overvoltage, undervoltage, different current-limit types, and different current-limit thresholds.

Features

- 4.5V to 60V Operating-Voltage Range
- Features a TVS Diode across the Input and Schottky Diode across the Output Terminals
- Evaluates UVLO, OVLO, Three Current-Limit Types, and Current-Limit Threshold
- UVLO programmed to 4.5V
- OVLO programmed to 36V
- Jumper-Configurable Current-Limit (Selected as 0.1A by default)
- Current-Limit Mode Set To Autoretry by default
- Proven PCB Layout
- Fully Assembled and Tested

Ordering Information appears at end of data sheet.

Quick Start

Recommended Equipment

- MAX17608 EV kit
- 60V DC power supply
- Multimeters
- Adjustable load (0A-1.5A)
- USB-A male to USB-B male cable or 5V DC power supply

Equipment Setup and Test Procedure

The EV kit is fully assembled and tested. Follow the steps below to verify board operation.

Caution: Do not turn on the power supply until all connections are completed.

- 1) Verify that all jumpers are in their default positions.
- 2) Connect the USB cable to J1 from a computer or connect a 5V-DC power supply to TP3.
- 3) Verify that LED1 is on.
- 4) Set the 60V DC power supply to 5V and connect to IN (J2/TP6). Verify that OUT (J3/TP8) is 5V.
- 5) Gradually increase the DC power-supply voltage and verify that OUT voltage goes down and \overline{UVOV} goes low when input reaches approximately 36V.
- 6) Gradually decrease the DC power-supply voltage and verify that OUT comes back and \overline{UVOV} goes high when the input reaches approximately 34.8V.
- 7) Set the DC power-supply voltage to 24V and connect the adjustable load between OUT and GND terminals and a multimeter in series to measure the current. Gradually increase the load current and verify that the OUT goes down and \overline{FLAG} goes low when the load current increases above 0.1A.
- 8) The jumper JU1 can be configured to change the current limit as given in [Table 2](#). Verify various current limit operations by repeating step 7.

CAUTION: When applying a negative input to V_{IN} , the negative input test should be performed when the output capacitors are fully discharged and V_{BUS} is not supplied.

MAX17608 Evaluation Kit

Evaluates: MAX17608 – 4.5V to 60V, 1A, OV, UV, Reverse-Voltage Protector with Forward/Reverse Current Limit

Detailed Description

The EV kit circuit can be configured to evaluate user-defined UVLO and OVLO thresholds using resistor-dividers. The overcurrent threshold is determined by external resistors connected to the SET1 pin and is jumper-configurable through jumper JU1. Using jumper JU4, the EV kit circuit can be configured to evaluate different current limit types (Autoretry, Continuous, and Latch-off). LED1 on the EV kit indicates availability of logic power for annunciation signals (\overline{UVOV} and \overline{FLAG}) and EN.

The EV kit provides on-board output capacitors to enable a demonstration of the MAX17608 protection features.

Input-Power Supply

The EV kit is powered by a user-supplied 4.5V to 60V power supply connected between TP6 (INPUT POWER) and GND.

Enable

To enable the device, connect a USB-A male connector from the computer to the USB-B female connector, J1, or an external 5V supply to TP3 and GND. This provides 5V to V_{BUS} and to the EN pin (JU5 connects V_{BUS} to EN by default). Choose the JU5 setting to enable or disable operation of the MAX17608 (see [Table 1](#)).

UVLO/OVLO Threshold

Ensure jumper JU2 is installed to use the UVLO/OVLO resistive dividers.

Table 1. Enable (JU5)

| JUMPER | SHUNT POSITION | DESCRIPTION | MAX17608 STATUS |
|--------|----------------|-------------------------------|-----------------|
| JU5 | 1-2* | EN pin connected to V_{BUS} | ON |
| | 2-3 | EN pin connected to GND | OFF |
| | Open | EN pin floating | ON |

*Default position.

Table 2. Current-Limit Threshold (JU1)

| JUMPER | SHUNT POSITION | DESCRIPTION |
|--------|----------------|--------------------------|
| JU1 | 1-2* | Current limit 0.1A |
| | 3-4 | Current limit 0.5A |
| | 5-6 | Current limit 1.0A |
| | 7-8 | Current limit adjustable |

*Default position.

The UVLO threshold for input voltage is set through the R9, R10 resistive divider. Use the following equation to calculate the value of R10 for a required undervoltage threshold level:

$$R10 = \frac{R9}{\left(\frac{V_{UVLO}}{V_{REF}} - 1\right)}$$

where R9 can be chosen as 2.2M Ω , V_{REF} is 1.5V, and V_{UVLO} is the required undervoltage protection threshold.

The OVLO threshold for input voltage is set through the R11, R12 resistive divider. Use the following equation to calculate the value of R12 for a required overvoltage threshold level:

$$R12 = \frac{R11}{\left(\frac{V_{OVLO}}{V_{REF}} - 1\right)}$$

where R11 can be chosen as 2.2M Ω , V_{REF} is 1.5V, and V_{OVLO} is the required overvoltage protection threshold.

Current-Limit Threshold

The EV kit features a jumper (JU1) to select the current-limit threshold. Install a jumper as shown in [Table 2](#) to change the current-limit threshold.

MAX17608 Evaluation Kit

Evaluates: MAX17608 – 4.5V to 60V, 1A, OV, UV, Reverse-Voltage Protector with Forward/Reverse Current Limit

Current-Limit Type Select

The EV kit features jumper JU4 to select different current-limit responses. See [Table 3](#) for jumper settings.

Output-Load Capacitor

Use JU6 to connect the OUT pins to the OUT test point (TP8). Use jumper JU7 to connect output to 330 μ F capacitors. See [Table 4](#) for jumper settings

Table 3. Current-Limit Type Select (JU4)

| JUMPER | SHUNT POSITION | DESCRIPTION |
|--------|----------------|-------------|
| JU4 | 1-2 | Latch-off |
| | 2-3 | Continuous |
| | Open* | Autoretry |

*Default position.










Table 4. Output Load Capacitor (JU7)

| JUMPER | SHUNT POSITION | DESCRIPTION |
|--------|----------------|---------------------------------|
| JU7 | Installed | OUT connected to C4 and C5. |
| | Not installed* | OUT not connected to C4 and C5. |

*Default position.

MAX17608 EV Kit Performance Report

($V_{IN} = 24V$, unless otherwise noted.)

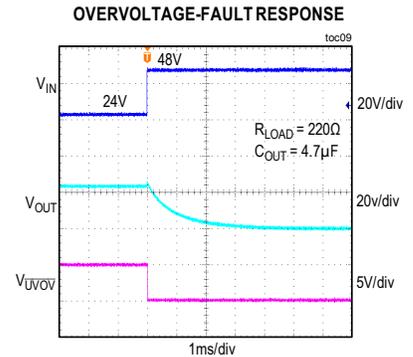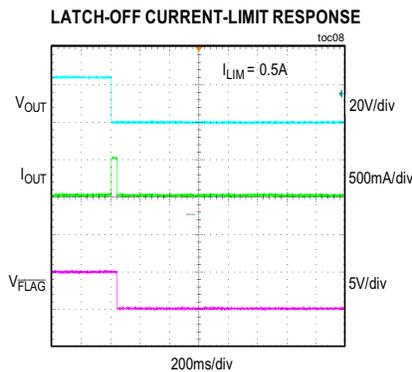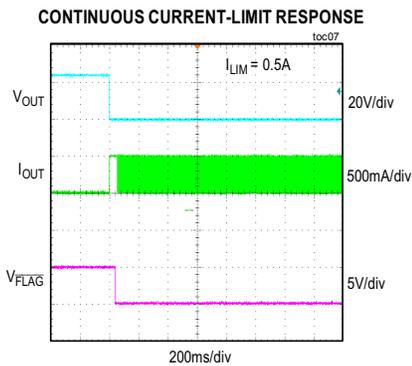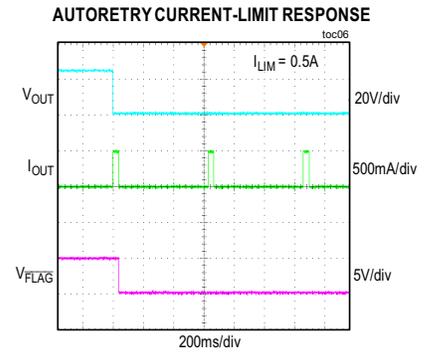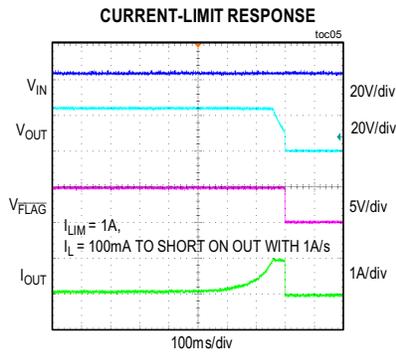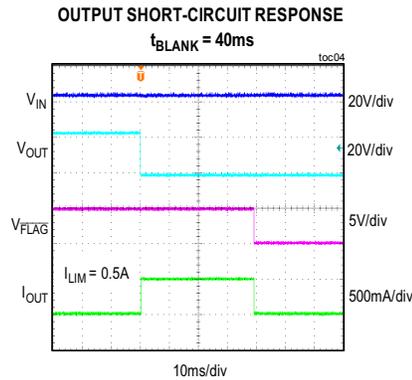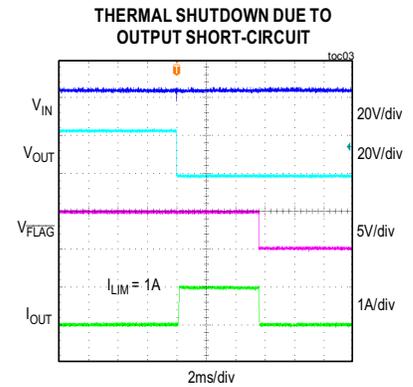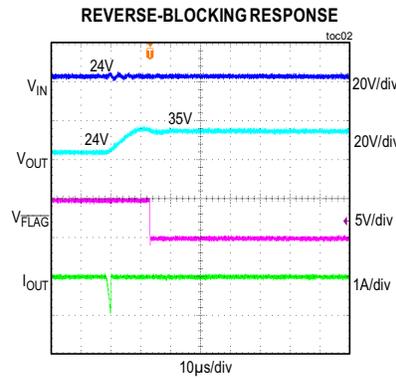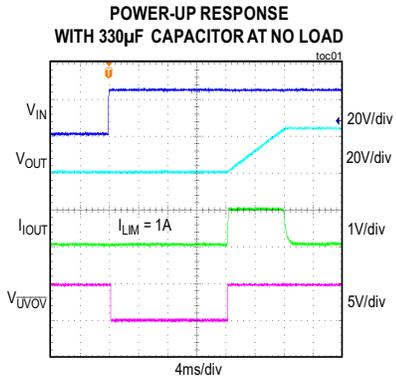

MAX17608 Evaluation Kit

Evaluates: MAX17608 – 4.5V to 60V, 1A, OV, UV, Reverse-Voltage Protector with Forward/Reverse Current Limit

Component Suppliers

| SUPPLIER | WEBSITE |
|---|--|
| Bourns, Inc. | www.bourns.com |
| Fairchild Semiconductor | www.fairchildsemi.com |
| FCI Electronics Interconnection Solutions | www.fciconnect.com |
| Lite-On, Inc. | www.us.liteon.com |
| Lumex Inc. | www.lumex.com |
| Murata Americas | www.murata.com |
| Panasonic Corp. | www.panasonic.com |
| Phoenix Contact, Inc. | www.phoenixcontact.com |
| STMicroelectronics | www.us.st.com |
| TDK Corp. | www.component.tdk.com |

Note: Indicate that you are using the MAX17608 when contacting these component suppliers.

Ordering Information

| PART | TYPE |
|----------------|--------|
| MAX17608EVKIT# | EV Kit |

MAX17608 Evaluation Kit

Evaluates: MAX17608 – 4.5V to 60V, 1A, OV, UV, Reverse-Voltage Protector with Forward/Reverse Current Limit


MAX17608 EV Kit Bill of Materials

| PART REFERENCE | QTY | DESCRIPTION | MANUFACTURER PART NUMBER |
|---------------------|-----|---|-------------------------------------|
| C1 | 1 | 1µF 10%, 25V X7R ceramic capacitors (0603) | Murata GRM188R61E105KA12 |
| C2 | 1 | 0.47µF 10%, 100V X7R ceramic capacitors (0805) | Murata GRM21BR72A474KA73L |
| C3 | 1 | 4.7µF 10%, 100V X7R ceramic capacitors (1210) | Murata GRM32ER72A475KE14 |
| C4 | 1 | 330µF 20%, 50V aluminium (10mm) | Panasonic EEU-EB1H331 |
| D1 | 1 | TVS Diode, 600W (SMB) | Bourns SMBJ40CA |
| D2 | 1 | Power Schottky Diode, 60V, 5A (SMC) | Diodes Incorporated B560CQ-13-F |
| D3 | 1 | Power Schottky Diode, 60V, 1A (SMA) | Diodes Incorporated B160-13-F |
| J1 | 1 | USB B connector | FCI Connect 61729-0010BLF |
| J2, J3 | 2 | 2-Pin Green PC Terminal Block | Degson Electronics DG128-5.0-02P-14 |
| JU1 | 1 | 2x4 Dual-Row Header, 0.1in centers, cut to fit | Sullins Connector PBC04DAAN |
| JU2, JU3, JU6, JU7 | 4 | 2-Pin Single-Row Header, 0.1in centers, cut to fit | Molex Connector 22-28-4023 |
| JU4, JU5 | 2 | 3-Pin Single-Row Header, 0.1in centers, cut to fit | Sullins Connector PEC03SAAN |
| LED1 | 1 | Green LED (1206) | Kingbright APT3216SGC |
| R1 | 1 | 1k ohm 1% resistors (0603) | - |
| R2, R3 | 2 | 10k ohm 1% resistors (0402) | - |
| R4 | 1 | 150k ohm 5% resistor (0402) | - |
| R5, R13 | 2 | 5k ohm 0.1% resistors (0402) | - |
| R6 | 1 | 15k ohm 1% resistors (0402) | - |
| R7 | 1 | 3k ohm 1% resistors (0402) | - |
| R8 | 1 | 1.5k ohm 1% resistors (0402) | - |
| R9, R11 | 2 | 2.2M ohm 5% resistors (0402) | - |
| R10 | 1 | 1.1M ohm 1% resistors (0402) | - |
| R12 | 1 | 95.3k ohm 1% resistors (0402) | - |
| R14 | 1 | 20k ohm 1% resistors (0402) | - |
| R15 | 1 | 1k ohm 1% resistors (0402) | - |
| R16 | 1 | 20k ohm Trimmer Potentiometers | Bourns 3296W-1-203LF |
| TP1, TP9, TP11-TP13 | 5 | White Test Point | Keystone Electronics Corp 5002 |
| TP2, TP4, TP5, TP7 | 4 | Black Test Point | Keystone Electronics Corp 5001 |
| TP3, TP6, TP8 | 3 | Red Test Point | Keystone Electronics Corp 5000 |
| TP10 | 1 | Green Test Point | Keystone Electronics Corp 5116 |
| U1 | 1 | 4.5V to 60V, 1A, OV, UV, Reverse Voltage Protector with Forward/Reverse Current Limit (12-pin TDFN-EP, 3mmx3mm) | MAX17608ATC+ |
| C5 | 0 | Not Installed; 330µF 20%, 50V aluminium (10mm) | Panasonic EEU-EB1H331 |
| D4 | 0 | Not Installed; TVS Diode, 600W (SMB) | Bourns SMBJ40CA |
| PCB | 1 | PCB: MAX17608 Evaluation Kit | - |

MAX17608 Evaluation Kit

Evaluates: MAX17608 – 4.5V to 60V, 1A, OV, UV, Reverse-Voltage Protector with Forward/Reverse Current Limit


MAX17608 EV Kit Schematic

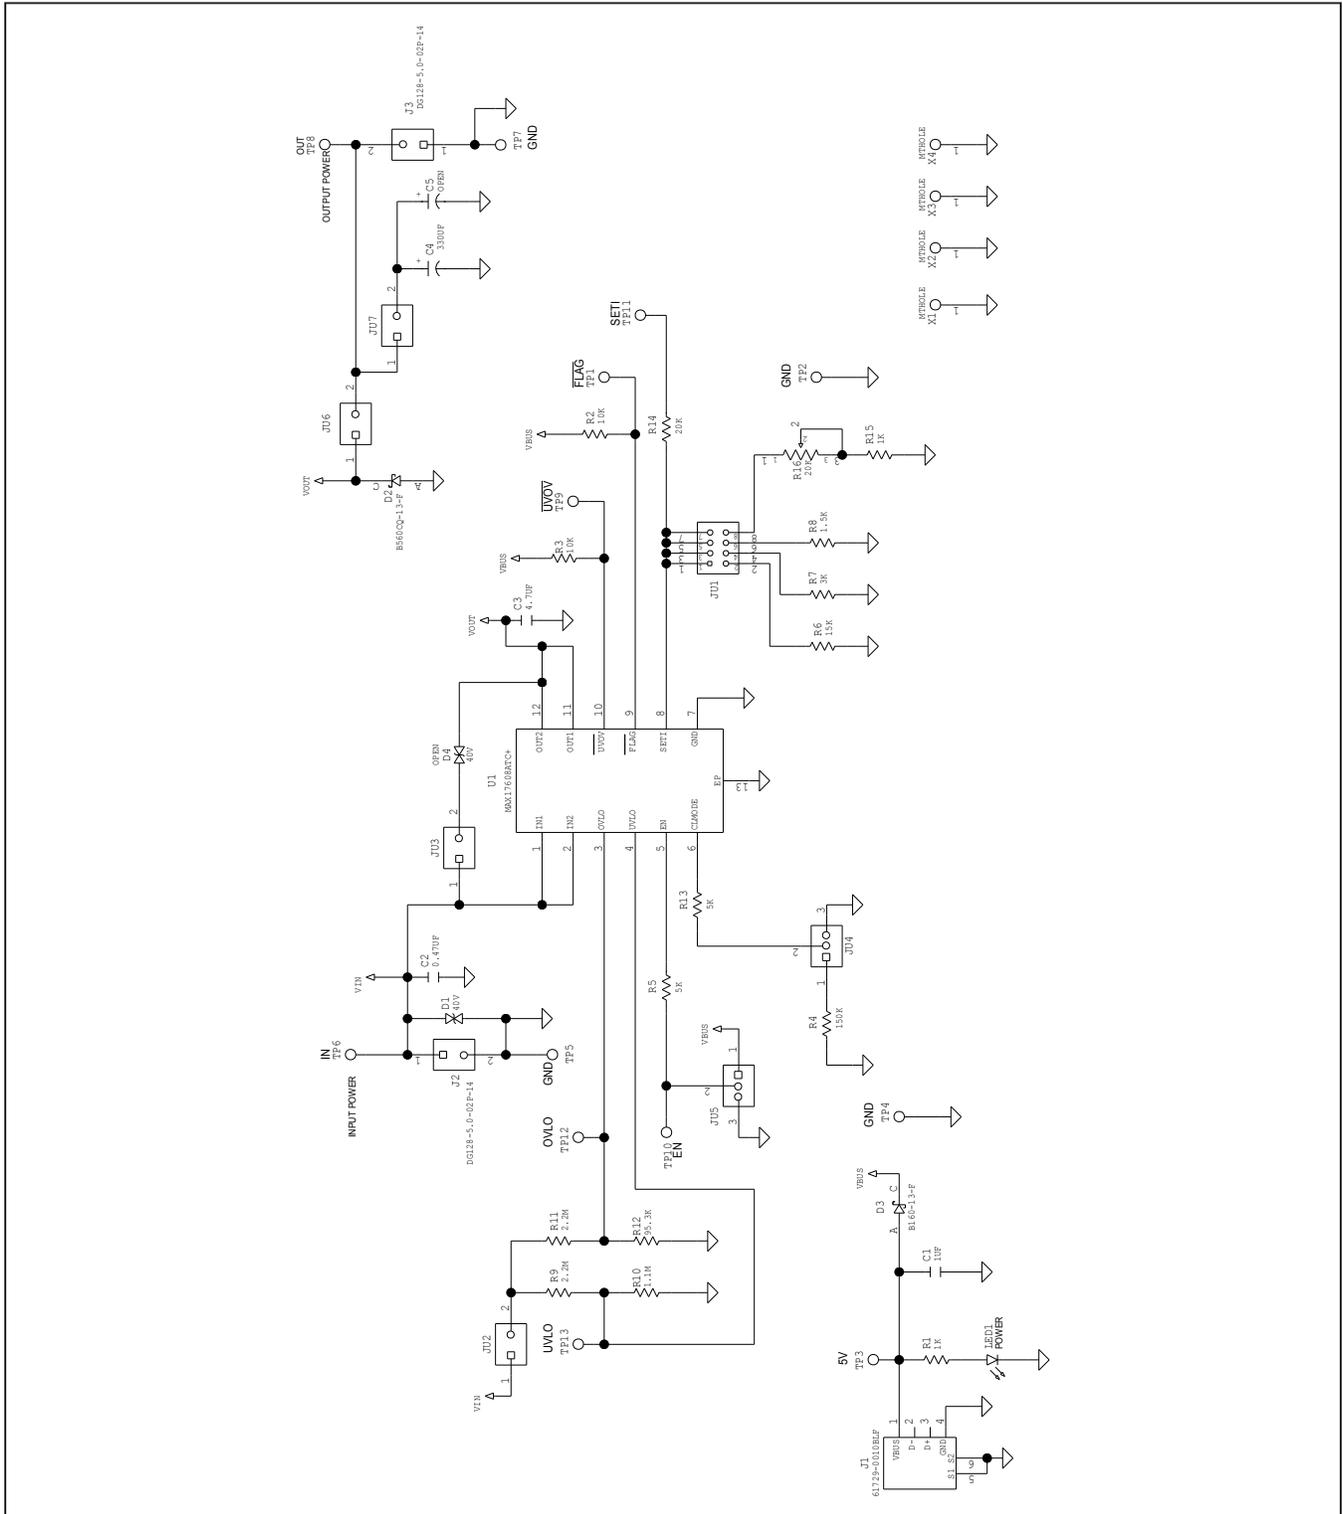


MAX17608 Evaluation Kit

Evaluates: MAX17608 – 4.5V to 60V, 1A, OV, UV, Reverse-Voltage Protector with Forward/Reverse Current Limit


MAX17608 EV Kit PCB Layout

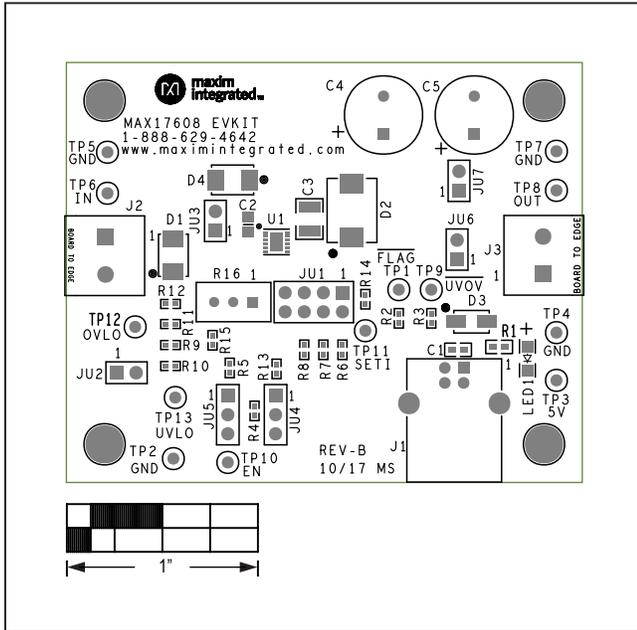

MAX17608 EV Kit PCB Layout—Top Silkscreen

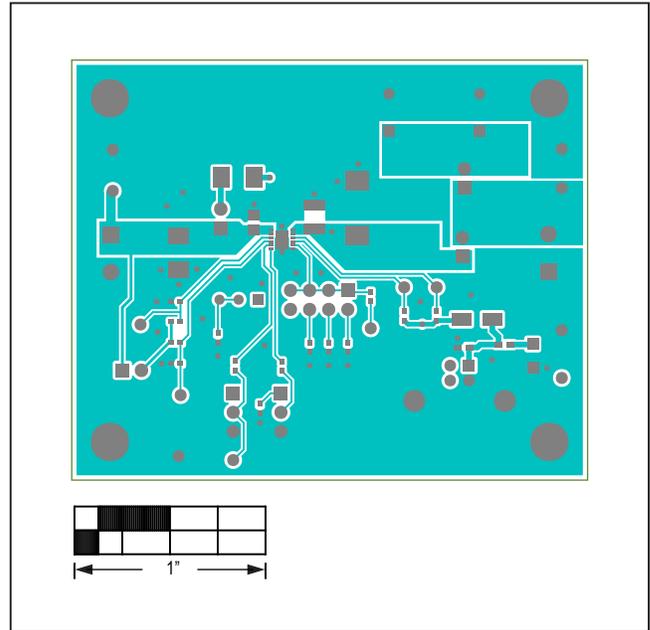

MAX17608 EV Kit PCB Layout—Top Layer

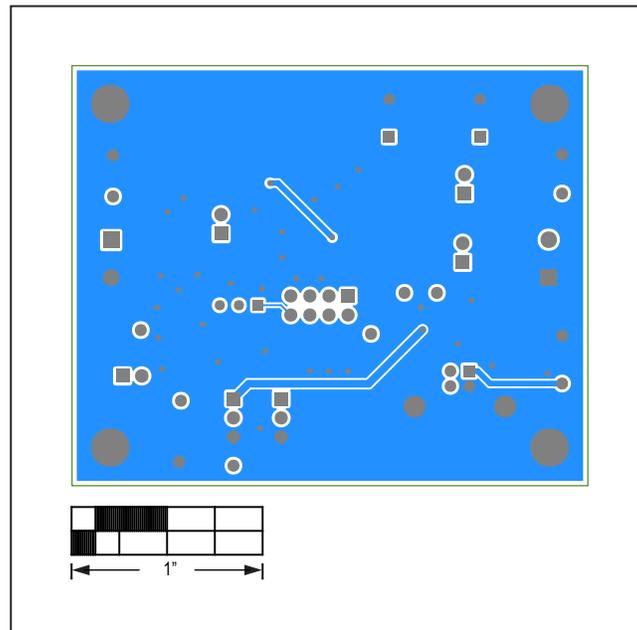

MAX17608 EV Kit PCB Layout—Bottom Layer

MAX17608 Evaluation Kit

Evaluates: MAX17608 – 4.5V to 60V, 1A,
OV, UV, Reverse-Voltage Protector with
Forward/Reverse Current Limit

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|-----------------|---------------|
| 0 | 1/18 | Initial release | — |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at www.maximintegrated.com.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru