



# BIAS 6 Watt LED Drivers

## Universal Input/Output with AOVC™

BPWXL 6-9U-070 (700mA constant current)

BPWXLD 6-9U-070 (700mA, 0-10 dimmable)

BPWXL 6-21U-035 (350mA constant current)

BPWXLD 6-21U-035 (350mA, 0-10 dimmable)



### Benefits

- Bias Adaptive Output Voltage Control, AOVC™ technology (patent pending) provides the broadest range of applications with the fewest driver SKUs and 75%+ efficiency across all string lengths
- Highly reliable, rugged construction for indoor or outdoor applications
- True 0-10 volt dimming with 1000:1 range, IEC 60929 compatible
- 1% current regulation and no flicker
- Color coded flying leads for simple assembly and installation
- AC line or DC load switching without overshoot on startup

### Features

- Universal Input (100-308 VAC, 50/60Hz)
- Universal Output with AOVC™ (3-21VDC@350mA), (3-9VDC@700mA)
- Ingress protection to IP67
- -40 to +85°C ambient, 90°C maximum case temperature
- Flying Leads for AC and LED connections
- 3000 VAC Isolation
- 75% efficiency
- EN 55022, Class B; FCC Part 15, Class B
- Meets UL/CSA and EN Product Safety Requirements (UL 8750 Class 2)
- Overcurrent, short circuit (shorted string), open circuit (string break) and overload protected

### Operating Specifications

(@120VAC / 60 Hz / 25°C unless otherwise specified)

Electrical	
Input Voltage Range	100-308 VAC (50/60Hz)
Output Power (Pmax)	6 W nom (50/60Hz)
String Voltage (Minimum)	3.0 VDC
Efficiency	75% nom.
Temperature Regulation Io (Peak)	+/- 2%, Po < Pmax
Isolation	3000 VAC (meets UL/CSA & EN Product Safety)
Earth Leakage @ 120 VAC	< 10 uA
Short Circuit Protection	Continuous, Pin ≤ 0.7 w @ 120 VAC
Reliability @ 25° C, MIL HDBK-217F	> 500 Khr MTBF
0-10 VDC Dimming	Per IEC 60929, Annex E
Line Regulation, Io (Peak)	+/- 1%, Po < Pmax
AC Input Connections	Line BLK, Neutral WHT
DC Output Connections	Pos(+) RED, Neg (-) BLU
Dimming (0-10 VDC) Connections	Adjust PUR/Com GRY

Environmental	
Operating Temperature	-40 to 85° C
Case Temperature, maximum	90° C
Storage Temperature	-40 to 105° C
Ingress Protection	IP67
Mechanical	
Package Size (L x W x H)	1.9 x 1.74 x 0.94 inches
Lead Length	11", 18AWG 600V class
Safety and Standards	
Safety Compliance	UL: 60950-1, 2nd Ed./CSAC22.2 60950-1-07 2nd Ed. ETL: UL 8750 Class 2/CAN/CSA c22.2 (1)
EMI Emissions	EN 55022, Class B, FCC Part 15, Class B
Standards Compliance	IEC61347-1, IEC61347-2-3

Model Number	Maximum String Voltage	Output Current	Dimming
BPWXL 6-9U-070	9 VDC	700 mA	N/A
BPWXLD 6-9U-070	9 VDC	0 - 700 mA	0 - 10 VDC, Vd
BPWXL 6-21U-035	21 VDC	350 mA	N/A
BPWXLD 6-21U-035	21 VDC	0 - 350 mA	0 - 10 VDC, Vd



5 Year Limited Warranty - see Bias Power published warranty for specifics



www.biaspower.com

BPWXL(D) 6 Series Data Sheet, Page 1 of 2

Revised 11/02/2013

Specifications subject to change



# BIAS 6 Watt LED Drivers

Universal Input/Output with AOVC™


BPWXL 6-9U-070 (700mA constant current)

BPWXL 6-9U-070 (700mA, 0-10 dimmable)


BPWXL 6-21U-035 (350mA constant current)

BPWXL 6-21U-035 (350mA, 0-10 dimmable)

## Non-Dimming (BPWXL)

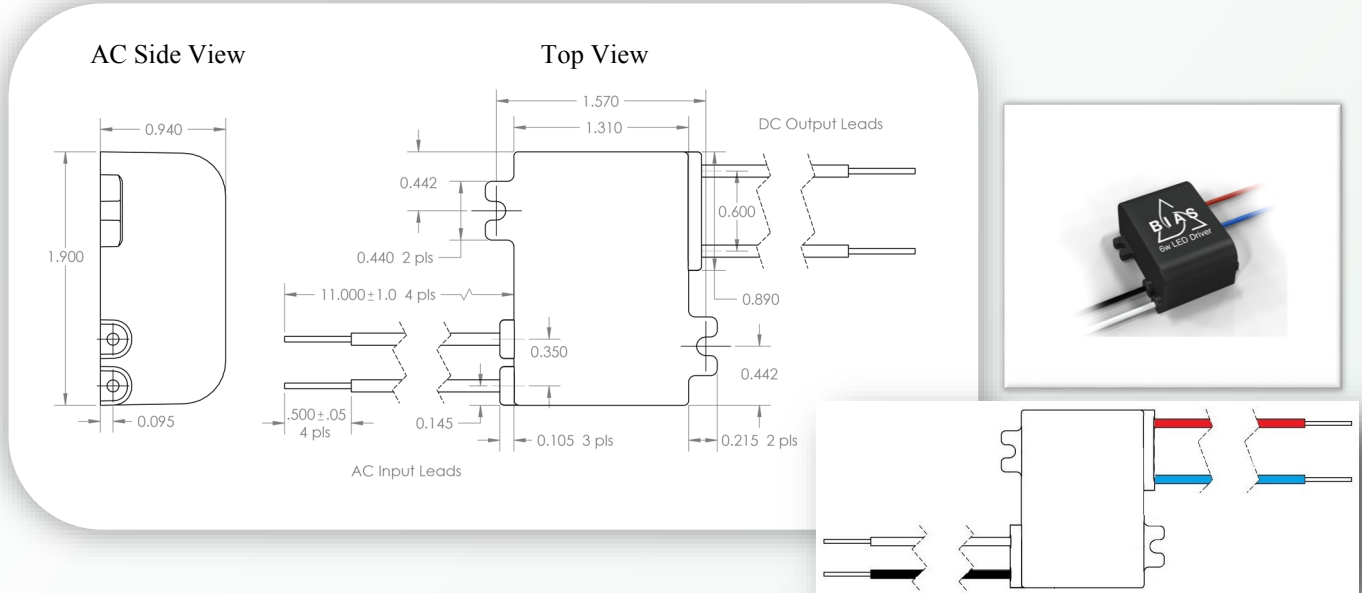

## Dimming (BPWXL D)

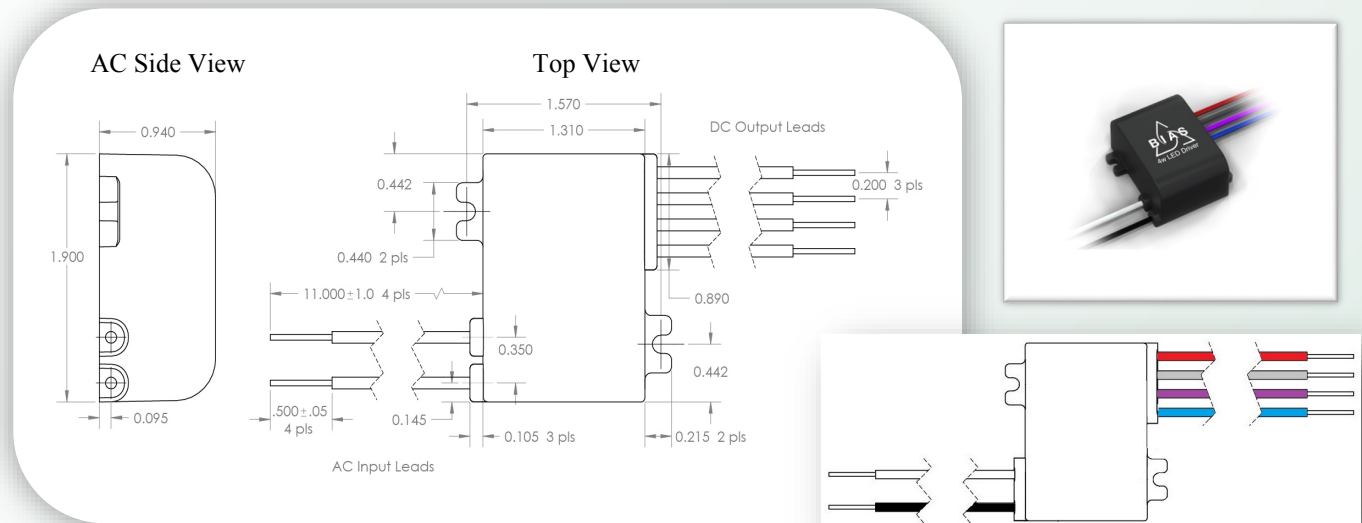

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)