



## DP86

### SPECIFICATIONS

- ♦ 316L SS
- ♦ Wet/Wet Differential
- ♦ Low Pressure

The DP86 differential pressure sensor is a double-sided, media compatible, piezoresistive silicon pressure sensor packaged in a 316L stainless steel housing. The DP86 is designed for o-ring mounting. The sensing package utilizes silicone oil to transfer pressure from the two 316L stainless steel diaphragms to a single sensing element.

The DP86 is designed for high performance, low pressure applications where differential pressure measurement is required. The stainless steel package makes it suitable for use in liquids and corrosive environments.

Please refer to the DP86 uncompensated, non-silicone oil, constant current and constant voltage (fittings and cable design) for more information on different features of the DP86.

## FEATURES

O-Ring Mount  
Up to -40°C to +125°C Operating Range  
Up to  $\pm 0.1\%$  Pressure Non Linearity  
Solid State Reliability  
Low Pressure

## APPLICATIONS

Level Controls  
Tank Level Measurement  
OEM Equipment  
Corrosive Fluids and Gas Measurement Systems  
Flow Measurements

## STANDARD RANGES

| Range    | psid |
|----------|------|
| 0 to 1   | *    |
| 0 to 5   | *    |
| 0 to 15  | *    |
| 0 to 30  | *    |
| 0 to 50  | *    |
| 0 to 100 | *    |
| 0 to 300 | *    |
| 0 to 500 | *    |

## PERFORMANCE SPECIFICATIONS

Supply Current: 1.5mA



Ambient Temperature: 25°C (unless otherwise specified)

| PARAMETERS                             | 001PSI                                                              |       |       | 005PSI |           |       | ≥015PSI |       |       | UNITS       | NOTES |
|----------------------------------------|---------------------------------------------------------------------|-------|-------|--------|-----------|-------|---------|-------|-------|-------------|-------|
|                                        | MIN                                                                 | TYP   | MAX   | MIN    | TYP       | MAX   | MIN     | TYP   | MAX   |             |       |
| Sensitivity                            | 9.0                                                                 |       | 20.0  | 12.5   | 19.5      | 26.5  | 13.2    | 20    | 26.5  | mV/V@FS     |       |
| Zero Pressure Output                   | -4.0                                                                |       | 8.0   | -6.0   |           | 8.0   | -6.0    |       | 8.0   | mV/V        | 1     |
| Pressure Non Linearity                 | -0.30                                                               |       | 0.30  | -0.20  |           | 0.20  | -0.10   |       | 0.10  | %Span       | 2     |
| Pressure Hysteresis                    | -0.10                                                               |       | 0.10  | -0.10  |           | 0.10  | -0.05   |       | 0.05  | %Span       |       |
| Input/Output Resistance                | 4400                                                                |       | 6200  | 3.8K   | 4400      | 5800  | 3800    | 4400  | 5800  | Ω           |       |
| Temp. Coefficient – Span               | -3300                                                               | -2800 | -2300 | -1650  | -1250     | -1000 | -1450   | -1250 | -1000 | ppm/°C      | 3     |
| Temp. Coefficient – Offset             |                                                                     | 1     |       |        | 1         |       |         | 1     |       | uV/V/°C     | 3     |
| Temp. Coefficient – Resistance         | 2600                                                                | 3200  | 3500  | 1300   | 1510      | 1750  | 1300    | 1510  | 1750  | ppm/°C      | 3     |
| Thermal Hysteresis – Span              | -0.25                                                               |       | 0.25  | -0.25  |           | 0.25  | -0.25   |       | 0.25  | %Span       | 3     |
| Thermal Hysteresis – Offset            | -0.25                                                               |       | 0.25  | -0.25  |           | 0.25  | -0.25   |       | 0.25  | %Span       | 3     |
| Line (Common Mode) Pressure            |                                                                     |       | 1000  |        |           | 1000  |         |       | 1000  | psi         |       |
| Line Pressure Effect on Zero           |                                                                     |       | 4.0   |        |           | 0.8   |         |       | 0.5   | %Span/1Kpsi |       |
| Pressure Overload                      |                                                                     |       | 10X   |        |           | 3X    |         |       | 3X    | Rated       | 4     |
| Pressure Burst                         |                                                                     |       | 12X   |        |           | 4X    |         |       | 4X    | Rated       | 5     |
| Operating Temperature                  | -40                                                                 |       | +85   | -40    |           | +125  | -40     |       | +125  | °C          | 6     |
| Storage Temperature                    | -40                                                                 |       | +125  | -40    |           | +125  | -40     |       | +125  | °C          | 6     |
| Vibration (10~2000Hz)                  |                                                                     |       | 20    |        |           | 20    |         |       | 20    | g           |       |
| Insulation Resistance (50Vdc)          | 50                                                                  |       |       | 50     |           |       | 50      |       |       | MΩ          | 7     |
| Output Load Resistance                 | 5                                                                   |       |       | 5      |           |       | 5       |       |       | MΩ          | 8     |
| Supply Voltage                         |                                                                     | 5.0   | 12.0  |        | 5.0       | 9.5   |         | 5     | 9.5   | V           |       |
| Supply Current                         |                                                                     |       | 2.0   |        |           | 1.5   |         |       | 1.5   | mA          |       |
| Voltage Breakdown                      |                                                                     |       | 500   |        |           | 500   |         |       | 500   | Vrms        | 9     |
| Endurance (FS @ 25°C)                  |                                                                     |       |       |        | 1,000,000 |       |         |       |       | Cycles      |       |
| Media Compatibility –<br>Pressure Port | All fluids and gases compatible with 316L Stainless Steel & Nitrile |       |       |        |           |       |         |       |       |             |       |

## Notes


1. Measured at ambient.
2. Best fit straight line
3. Over the temperature range -20°C to +85°C (0°C to 50°C for 1psi, 0°C to 70°C for 5psi) with respect to 25°C.
4. For high-end port, rated or 1000psi whichever is less; for low-end port, rated or 150psi whichever is less. The maximum pressure that can be applied without changing the transducer's performance or accuracy.
5. The maximum pressure that can be applied to a transducer without rupture of either the sensing element or transducer.
6. Temperature range for cable and connector is -20°C to +105°C.
7. Between case and sensing element.
8. Load resistance to reduce measurement errors due to output loading.
9. At dry air.
10. Direct mechanical contact with diaphragm is prohibited. Diaphragm surface must remain free of defects (scratches, punctures, fingerprints, etc.) for device to operate properly. Caution is advised when handling parts with exposed diaphragms. Use protective cap whenever devices are not in use.

## DIMENSIONS

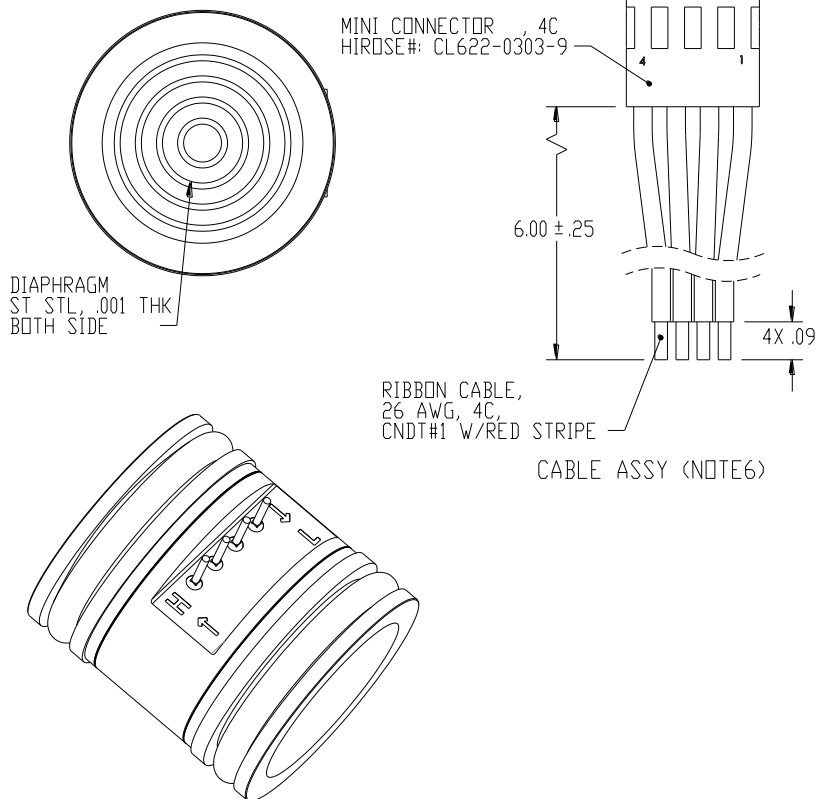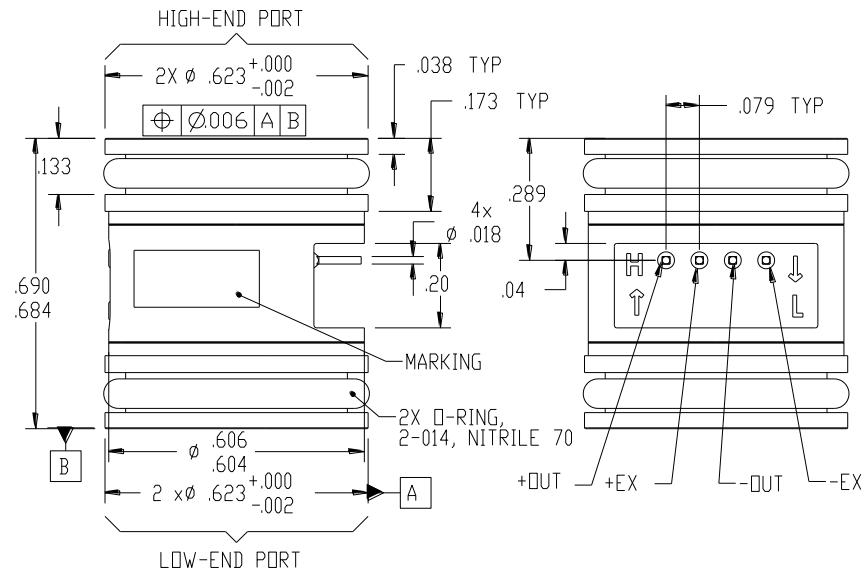


## COMPENSATION SCHEMATIC

(Sensors can be compensated using the schematic to get improved performance. A calibration data sheet is included with each unit that provides measured values along with resistor values that will achieve the calculated compensated performance.)

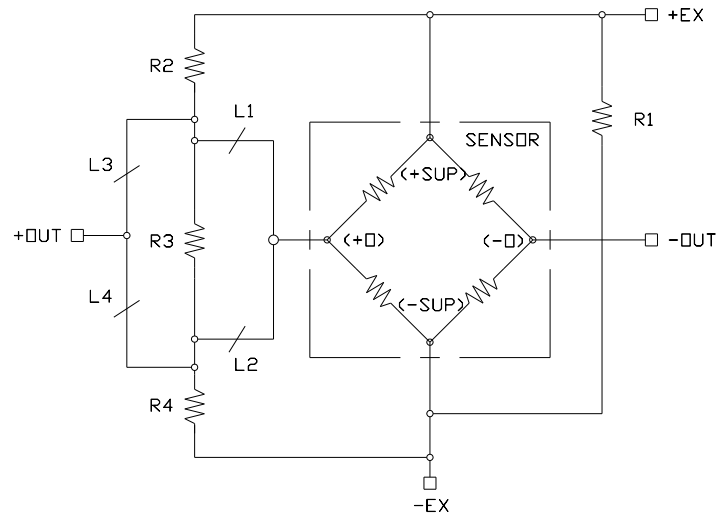

## ORDERING INFORMATION

### DP86 - 015D

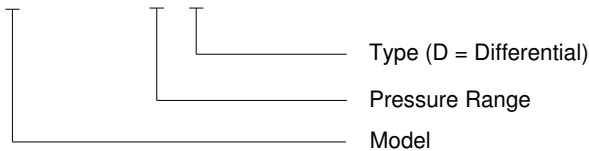

### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
Tel: 800-522-6752  
Email: [customercare.frmt@te.com](mailto:customercare.frmt@te.com)

### EUROPE

Measurement Specialties (Europe), Ltd.,  
a TE Connectivity Company  
Tel: 800-440-5100  
Email: [customercare.lcsb@te.com](mailto:customercare.lcsb@te.com)

### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
Tel: 0400-820-6015  
Email: [customercare.shzn@te.com](mailto:customercare.shzn@te.com)

### [TE.com/sensorsolutions](http://TE.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)