



Features

- 213 mm (8.4 in.) connector height with front-facing jumper and test fields
- 4 inch intervertical spacing when installed on 8 inch verticals - provides ample space for placing cross-connect (jumper) wires
- Slide access protector module field with self-latching design
- Front and rear snap-through fanning strips
-  Listed

MPC® Mainframe Connector (QCM486) 100-Pair Connector

The mainframe connector is a miniature, main distributing frame (MDF), high-density connector for use on the vertical side of main distributing frames or on protector frames.

The MPC® Mainframe Connector terminates 100 outside plant pairs and provides voltage or voltage and current protection for the central office personnel, wiring and equipment. It consists of a heavy gauge metal frame with an integral mounting bracket, flame-retardant plastic bases for the protector module, cross-connect (jumper) and test fields. The cross-connect and test fields are easily accessed from the front of the block to minimize installation and maintenance time.

The MPC® Mainframe Connector may be ordered with either insulation displacement connectors (IDCs) or wire-wrap terminations on the cross-connect (jumper) side. It is also available with 22 or 24 AWG (0.64 or 0.50 mm) stub cable in various lengths or stubless if desired.

The protector modules are installed on the side of the MPC® Mainframe Connector. Bourns® QMP-series solid-state and gas tube protector modules are available for the MPC® Mainframe Connector. The protector modules may be ordered separately or pre-installed in the connector's detent position ready for cutover with full protection assured.

A full range of installation and test accessories are available to support the MPC® Mainframe Connector.

Specifications

Plastic Materials

Main Body Polycarbonate, beige, UL 94V-0

Metal Parts

Mounting Hardware Steel, hard bright tin-plated

Current-Carrying Components High conductive copper or copper alloys, hard bright tin-plated

Outside Plant Cable Stub

Description 22 or 24 AWG (0.64 or 0.5 mm),
100-pair solid PVC or flame-retardant polyolefin or dual-layer solid CMR;
UL-listed and FT4 CSA certified polyolefin/PVC insulation, Alplast sheath
(Alvyn type)

Termination Wire-wrap

Grounding Through main chassis to main distribution frame

Resistance <1 milliohm change over product life

Cross-Connect (Jumper) Connections

Termination Wire-wrap or insulation displacement connections

Contact Resistance < 1 milliohm change over product life

Dielectric Strength 1000 VDC

Insulation Resistance > 500 megohms

Environmental Conditions For indoor use, 10 to 95 % RH

Temperature Characteristics Operating +32 ° to +122 °F (0 ° to 50 °C)

Frame Vertical Capacities

Height 2.13 m (7.0 ft.) 600 pairs

Height 2.45 m (8.0 ft.) 900 pairs

Height 2.76 m (9.0 ft.) 1100 pairs

Height 3.51 m (11.5 ft.) 1400 pairs


Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.

MPC® Mainframe Connector (QCM486) 100-Pair Connector

BOURNS®

Product Dimensions

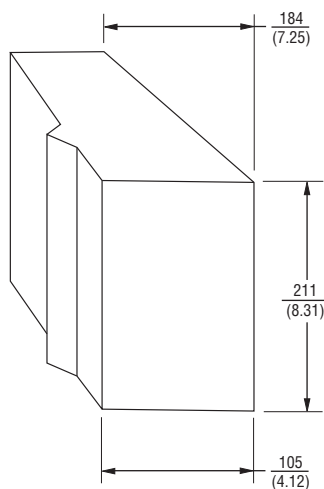

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

Packaging Specifications

Std. Pack	Stub Length m (ft.)	Size (H x W x D) mm (in.)	Weight kg (lb.)
Stubless			
4	0	410 x 410 x 310 (16 x 16 x 12)	36.4 (80)
Stubbed			
1	9.1 (30)	690 x 840 x 150 (27 x 33 x 6)	14.6 (32)
1	15.2 (50)	690 x 840 x 150 (27 x 33 x 6)	18.6 (41)
1	30.5 (100)	810 x 940 x 200 (32 x 37 x 8)	28.6 (63)

Note: Additional stub length options may be available. Please contact your nearest Bourns Representative for assistance.

How To Order

Model QCM486 X1 nn X nnn xxxx

Cross-connect Field _____
 A1 = Insulation Displacement Connections
 B1 = Wire-wrap

Stub _____
 00 = Stubless
 22 = 22 AWG
 24 = 24 AWG

Stub Entry _____
 0 = Stubless
 B = Bottom
 T = Top

Stub Length _____
 000 = Stubless
 030 = 9.1 m (30 ft.)
 050 = 15.2 m (50 ft.)
 100 = 30.5 m (100 ft.)

Protector Modules _____
 000 = No Protector Modules
 11A5 = (100) QMP11A5 Solid-state 300 V
 12A4P = (100) QMP12A4P Solid-state 300 V with PTC Sneak Current Protection
 6A5 = (100) QMP6A5 Gas 400 V
 6A4 = (100) QMP6A4 Gas 400 V, 350 mA Heat Coils

Examples: QCM486A100000011A5 = IDC, stubless with 11A5 protector modules (100 QMP11A5).

QCM486B124B0506A4 = Wire-wrap, 24 AWG, bottom stub, 50 foot, with 6A4 protector modules (100 QMP6A4).

MPC® Mainframe Connector (QCM486) 100-Pair Connector

BOURNS®

How to Order MPC® Connector Accessories

Product Code	Part Number	Description
QTH38B	A0276558	Termination Tool, IDC – used to terminate and trim wires in insulation displacement cross-connect terminals
303-1001	A0310189	Single Pair Test Cord – equipped with a plug for the test field and two alligator clips for connecting to test equipment, 1.75 ft. long
QCM31A	A0259585	100-Pair Test Connector – used for testing all pairs through the test field. Equipped with a test head and 15 ft. cable terminated with four (4) 25-pair Cinch-Jones connectors
QGF4A	A0260364	Module Guard – red plastic locking wedge to lock and flag protector modules in the MPC protector field, use 1 per module
NS19478L1	A0207604	Test Field Guard – red plastic guard to flag and prevent accidental contact with test points in the MPC test field, use 1 per pair
QGF22A	QGF22A	Jumper Field Guard, IDC – red plastic guard to flag and prevent accidental contact with jumper field terminals, use 2 per pair
545-1137	A0321718	Jumper Field Guard, Wire-wrap – red plastic guard to flag and prevent accidental contact with jumper field terminals, use 2 per pair
QAA32B	A0316451	Module Testing Adapter – allows 4-pin protector modules to be tested using standard 5-pin test equipment
QMP-EXT-01	QMP-EXT-01	Module Extraction Tool – tool used to assist with extraction of a single module from the protector field
QSBC1A	A0273233	Designation Strip – self-adhesive numbering strip to facilitate location of pair numbers on the jumper field

Note: Order by Part Number.

REV. D 04/15

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru