

IGBT/SiC Diode Co-pack


| | | |
|---------------|---|---------------|
| V_{CES} | = | 1200 V |
| I_{CM} | = | 100 A |
| $V_{CE(SAT)}$ | = | 1.9 V |

Features

- Optimal Punch Through (OPT) technology
- SiC freewheeling diode
- Positive temperature coefficient for easy paralleling
- Extremely fast switching speeds
- Temperature independent switching behavior of SiC rectifier
- Best RBSOA/SCSOA capability in the industry
- High junction temperature
- Industry standard packaging

Package

- RoHS Compliant


SOT – 227
Advantages

- Industry's highest switching speeds
- High temperature operation
- Improved circuit efficiency
- Low switching losses

Applications

- Solar Inverters
- Aerospace Actuators
- Server Power Supplies
- Resonant Inverters > 100 kHz
- Inductive Heating
- Electronic Welders

Maximum Ratings at $T_j = 175\text{ }^\circ\text{C}$, unless otherwise specified

| Parameter | Symbol | Conditions | Values | Unit |
|---------------------------|------------|---|-------------|------------------|
| IGBT | | | | |
| Collector-Emitter Voltage | V_{CES} | | 1200 | V |
| DC-Collector Current | I_C | $T_C \leq 130\text{ }^\circ\text{C}$ | 100 | A |
| Peak Collector Current | I_{CM} | Limited by T_{vjmax} | 200 | A |
| Gate Emitter Peak Voltage | V_{GES} | | ± 20 | V |
| IGBT Short Circuit SOA | t_{psc} | $V_{CC} = 900\text{ V}, V_{CEM} \leq 1200\text{ V}$ $V_{GE} \leq 15\text{ V}, T_{vj} \leq 125\text{ }^\circ\text{C}$ | 10 | μs |
| Operating Temperature | T_{vj} | | -40 to +175 | $^\circ\text{C}$ |
| Storage Temperature | T_{stg} | | -40 to +175 | $^\circ\text{C}$ |
| Isolation Voltage | V_{ISOL} | $I_{SOL} < 1\text{ mA}, 50/60\text{ Hz}, t = 1\text{ s}$ | 3000 | V |

Free-wheeling Silicon Carbide diode

| | | | | |
|--------------------------------------|------------|---|-----|---|
| DC-Forward Current | I_F | $T_C \leq 130\text{ }^\circ\text{C}$ | 100 | A |
| Non Repetitive Peak Forward Current | I_{FM} | $T_C = 25\text{ }^\circ\text{C}, t_p = 10\text{ } \mu\text{s}$ | tbd | A |
| Surge Non Repetitive Forward Current | $I_{F,SM}$ | $t_p = 10\text{ ms}, \text{ half sine}, T_C = 25\text{ }^\circ\text{C}$ | tbd | A |

Thermal Characteristics

| | | | | |
|-------------------------------------|------------|-----------|------|--------------------|
| Thermal resistance, junction - case | R_{thJC} | IGBT | 0.08 | $^\circ\text{C/W}$ |
| Thermal resistance, junction - case | R_{thJC} | SiC Diode | 0.53 | $^\circ\text{C/W}$ |

Mechanical Properties

| | Symbol | Values | | |
|----------------------------|--------|-------------------|------|------|
| | | min. | typ. | max. |
| Mounting Torque | M_d | | 1.5 | Nm |
| Terminal Connection Torque | | 1.3 | | Nm |
| Weight | | | 29 | g |
| Case Color | | Black | | |
| Dimensions | | 38 x 25.4 x 12 mm | | |

Electrical Characteristics at $T_j = 175\text{ }^\circ\text{C}$, unless otherwise specified

| Parameter | Symbol | Conditions | Values | | | Unit |
|--|---------------|--|---|------------|------|---------------|
| | | | min. | typ. | max. | |
| IGBT | | | | | | |
| Gate Threshold Voltage | $V_{GE(th)}$ | $V_{GE} = V_{CE}, I_C = 4\text{ mA}, T_j = 25\text{ }^\circ\text{C}$ | 5 | 6.2 | 7 | V |
| Collector-Emitter Leakage Current | $I_{CES,25}$ | $V_{GE} = 0\text{ V}, V_{CE} = V_{CES}, T_j = 25\text{ }^\circ\text{C}$ | | 0.10 | 1 | mA |
| | $I_{CES,175}$ | $V_{GE} = 0\text{ V}, V_{CE} = V_{CES}, T_j = 175\text{ }^\circ\text{C}$ | | 3.15 | | mA |
| Gate-Leakage Current | I_{GES} | $V_{CE} = 0\text{ V}, V_{GE} = 20\text{ V}, T_j = 175\text{ }^\circ\text{C}$ | -400 | | 400 | nA |
| Collector-Emitter Threshold Voltage | $V_{GE(TO)}$ | $T_j = 25\text{ }^\circ\text{C}$ | | 1.1 | | V |
| Collector-Emitter Slope Resistance | $R_{CE,25}$ | $V_{GE} = 15\text{ V}, T_j = 25\text{ }^\circ\text{C}$ | | 7.9 | | m Ω |
| | $R_{CE,175}$ | $V_{GE} = 15\text{ V}, T_j = 175\text{ }^\circ\text{C}$ | | 11.4 | | m Ω |
| Collector-Emitter Saturation Voltage | $V_{CE(SAT)}$ | $I_C = 100\text{ A}, V_{GE} = 15\text{ V}, T_j = 25\text{ }^\circ\text{C} (175\text{ }^\circ\text{C})$ | | 1.9 (2.2) | | V |
| Input Capacitance | C_{ies} | $V_{GE} = 0\text{ V}, V_{CE} = 25\text{ V}, f = 1\text{ MHz}, T_j = 150\text{ }^\circ\text{C}$ | | 8.55 | | nF |
| Output Capacitance | C_{oes} | | | 1.39 | | nF |
| Reverse Transfer Capacitance | C_{res} | | | 0.25 | | nF |
| Internal Gate Resistance | R_{Gint} | | | 2 | | Ω |
| Gate Charge | Q_G | $V_{CC} = 750\text{ V}, I_C = 100\text{ A}, V_{GE} = -8..15\text{ V}, T_j = 25\text{ }^\circ\text{C} (125\text{ }^\circ\text{C})$ | | 900 (900) | | nC |
| Module Lead Resistance | R_{mod} | $T_c = 25\text{ }^\circ\text{C} (175\text{ }^\circ\text{C})$ | | tbid | | m Ω |
| Reverse Bias Safe Operating Area | RBSOA | $T_j = 175\text{ }^\circ\text{C}, R_{\theta} = 56\text{ }^\circ\text{C/W}, V_{CC} = 1200\text{ V}, V_{GE} = 15\text{ V}$ | | 150 | | A |
| Short Circuit Current | I_{sc} | $T_j = 175\text{ }^\circ\text{C}, R_{\theta} = 56\text{ }^\circ\text{C/W}, V_{CC} = 900\text{ V}, V_{GE} = \pm 15\text{ V}$ | | 470 | | A |
| Short Circuit Duration | t_{sc} | | | | 10 | |
| Rise Time | t_r | $V_{CC} = 800\text{ V}, I_C = 100\text{ A}, R_{gon} = R_{goff} = 10\text{ }^\circ\Omega, V_{GE(on)} = 15\text{ V}, V_{GE(off)} = -8\text{ V}, L_S = 0.8\text{ }^\mu\text{H}, T_j = 25\text{ }^\circ\text{C}$ | | 254 | | ns |
| Fall Time | t_f | | | 153 | | ns |
| Turn On Delay Time | $t_{d(on)}$ | | | 244 | | ns |
| Turn Off Delay Time | $t_{d(off)}$ | | | 488 | | ns |
| Turn-On Energy Loss Per Pulse | E_{on} | | | 14.2 | | mJ |
| Turn-Off Energy Loss Per Pulse | E_{off} | | | 15.7 | | mJ |
| Rise Time | t_r | | $V_{CC} = 800\text{ V}, I_C = 100\text{ A}, R_{gon} = R_{goff} = 10\text{ }^\circ\Omega, V_{GE(on)} = 15\text{ V}, V_{GE(off)} = -8\text{ V}, L_S = 0.8\text{ }^\mu\text{H}, T_j = 175\text{ }^\circ\text{C}$ | | 211 | |
| Fall Time | t_f | | | 172 | | ns |
| Turn On Delay Time | $t_{d(on)}$ | | | 240 | | ns |
| Turn Off Delay Time | $t_{d(off)}$ | | | 636 | | ns |
| Turn-On Energy Loss Per Pulse | E_{on} | | | 11.1 | | mJ |
| Turn-Off Energy Loss Per Pulse | E_{off} | | | 21.8 | | mJ |
| Free-wheeling Silicon Carbide Diode | | | | | | |
| Forward Voltage | V_F | $I_F = 100\text{ A}, V_{GE} = 0\text{ V}, T_j = 25\text{ }^\circ\text{C} (175\text{ }^\circ\text{C})$ | | 2.08 (3.5) | | V |
| Threshold Voltage at Diode | $V_{D(TO)}$ | $T_j = 25\text{ }^\circ\text{C}$ | | 0.8 | | V |
| Peak Reverse Recovery Current | I_{rrm} | $I_F = 100\text{ A}, V_{GE} = 0\text{ V}, V_R = 800\text{ V}, -di_F/dt = 625\text{ A}/\mu\text{s}, T_j = 175\text{ }^\circ\text{C}$ | | 10 | | A |
| Reverse Recovery Time | t_{rr} | | | 100 | | ns |
| Rise Time | t_r | $V_{CC} = 800\text{ V}, I_C = 100\text{ A}, R_{gon} = R_{goff} = 10\text{ }^\circ\Omega, V_{GE(on)} = 15\text{ V}, V_{GE(off)} = -8\text{ V}, L_S = 0.8\text{ }^\mu\text{H}, T_j = 25\text{ }^\circ\text{C}$ | | 148 | | ns |
| Fall Time | t_f | | | 336 | | ns |
| Turn-On Energy Loss Per Pulse | E_{on} | | | 218 | | μJ |
| Turn-Off Energy Loss Per Pulse | E_{off} | | | 113 | | μJ |
| Reverse Recovery Charge | Q_{rr} | | | 730 | | nC |
| Rise Time | t_r | | | 178 | | ns |
| Fall Time | t_f | | $V_{CC} = 800\text{ V}, I_C = 100\text{ A}, R_{gon} = R_{goff} = 10\text{ }^\circ\Omega, V_{GE(on)} = 15\text{ V}, V_{GE(off)} = -8\text{ V}, L_S = 0.8\text{ }^\mu\text{H}, T_j = 175\text{ }^\circ\text{C}$ | | 268 | |
| Turn-On Energy Loss Per Pulse | E_{on} | | | 23 | | μJ |
| Turn-Off Energy Loss Per Pulse | E_{off} | | | 334 | | μJ |
| Reverse Recovery Charge | Q_{rr} | | | 480 | | nC |

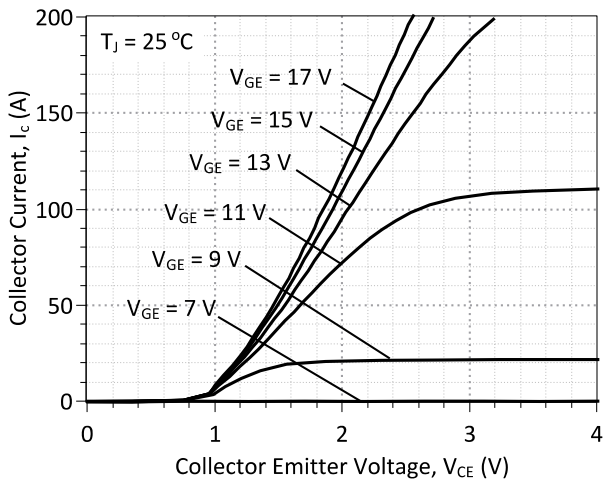


Figure 1: Typical Output Characteristics at 25 °C

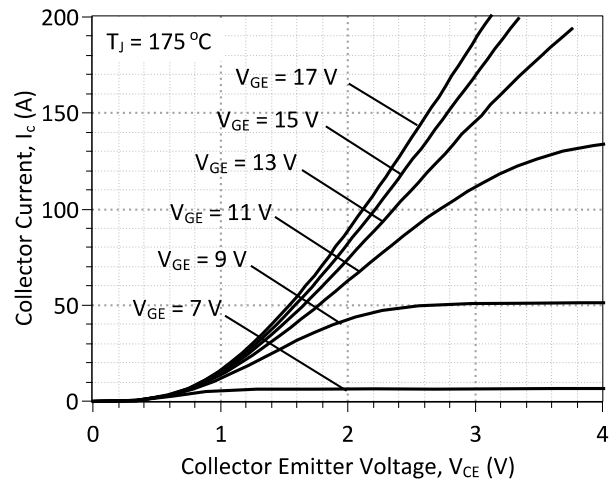


Figure 2: Typical Output Characteristics at 175 °C

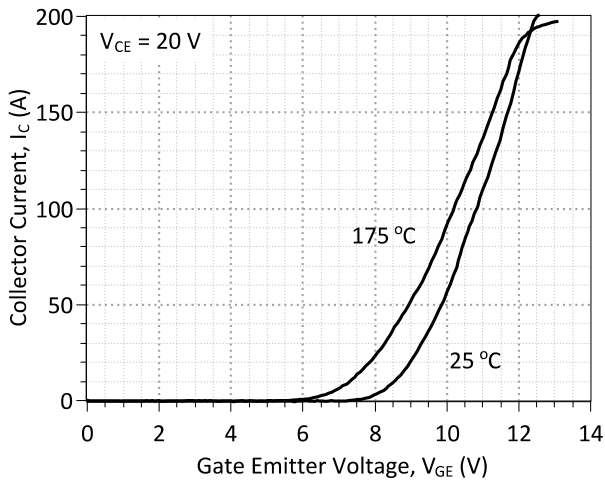


Figure 3: Typical Transfer Characteristics

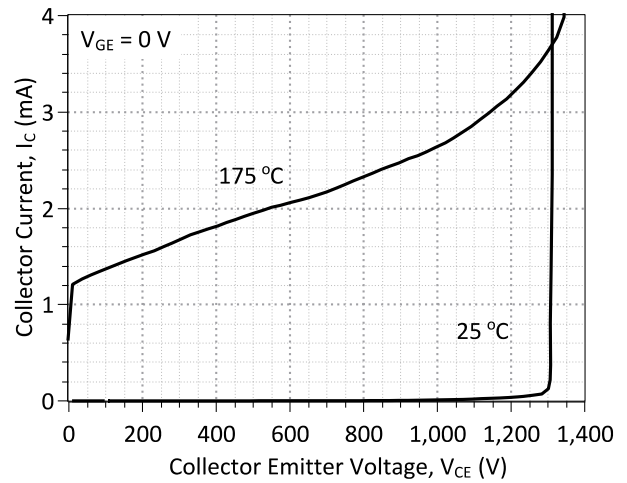


Figure 4: Typical Blocking Characteristics

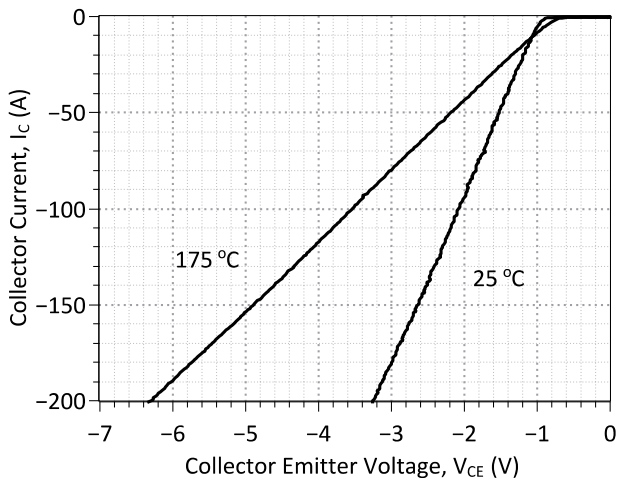


Figure 5: Typical FWD Forward Characteristics

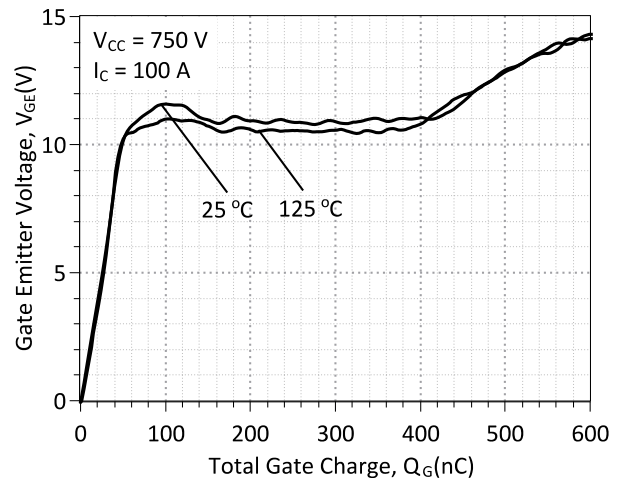


Figure 6: Typical Turn On Gate Charge

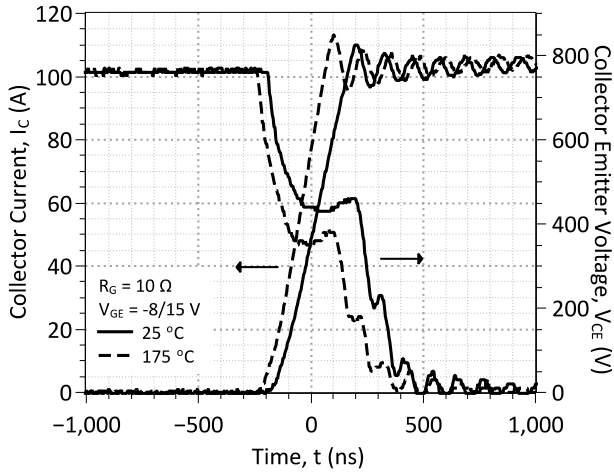


Figure 7: Typical Hard-Switched IGBT Turn On Waveforms

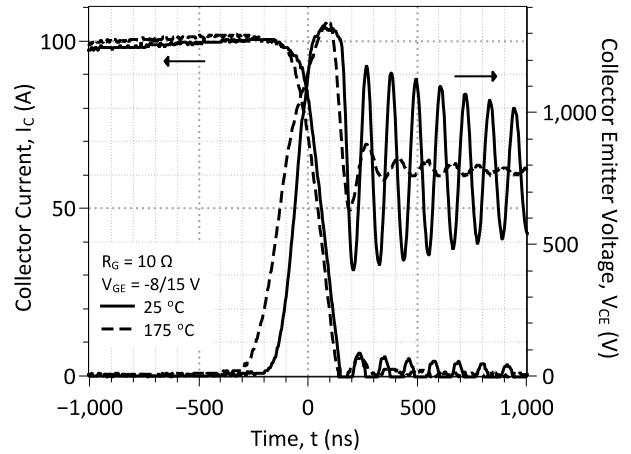


Figure 8: Typical Hard-Switched IGBT Turn Off Waveforms

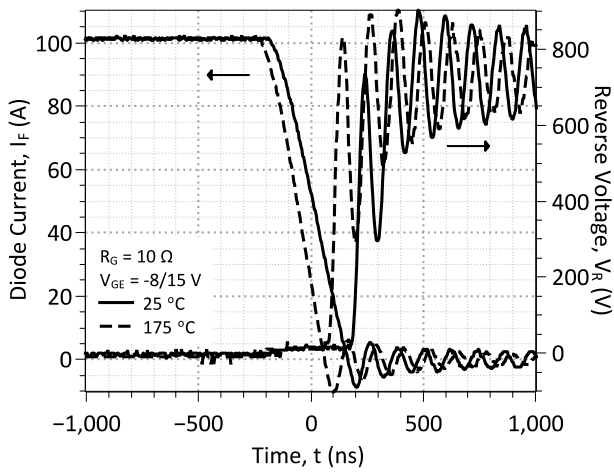


Figure 9: Typical Hard-Switched Free-wheeling SiC Diode Turn Off Waveforms

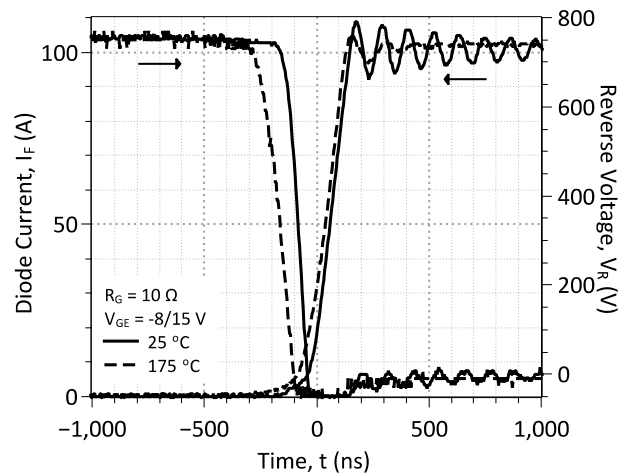


Figure 10: Typical Hard-Switched Free-wheeling SiC Diode Turn On Waveforms

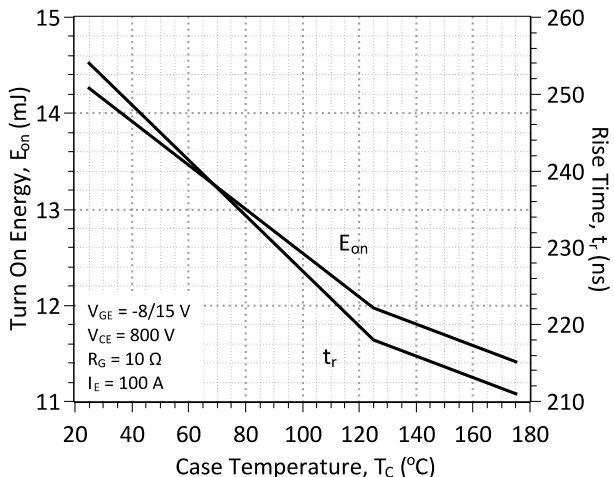


Figure 11: Typical Module Energy Losses and Switching Times at IGBT Turn On vs. Temperature

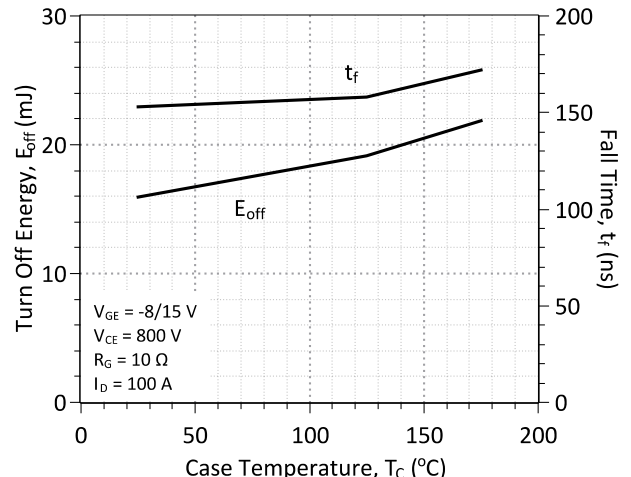


Figure 12: Typical Module Energy Losses and Switching Times at IGBT Turn Off vs. Temperature

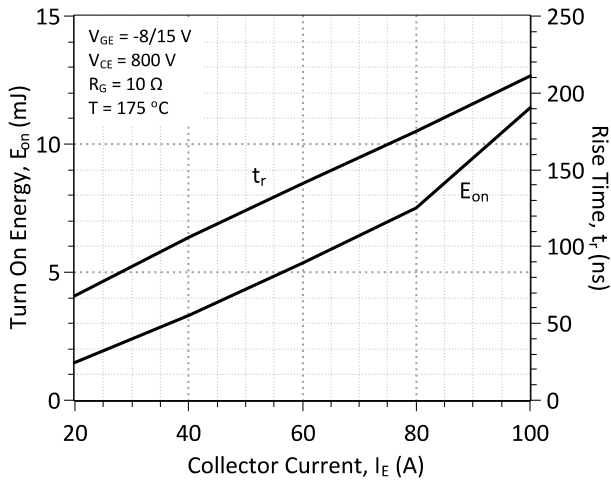


Figure 13: Typical Module Energy Losses and Switching Times at IGBT Turn On vs. Current

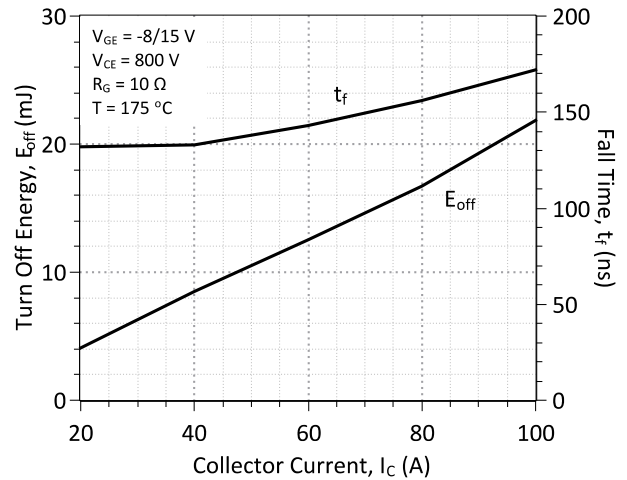


Figure 14: Typical Module Energy Losses and Switching Times at IGBT Turn Off vs. Current

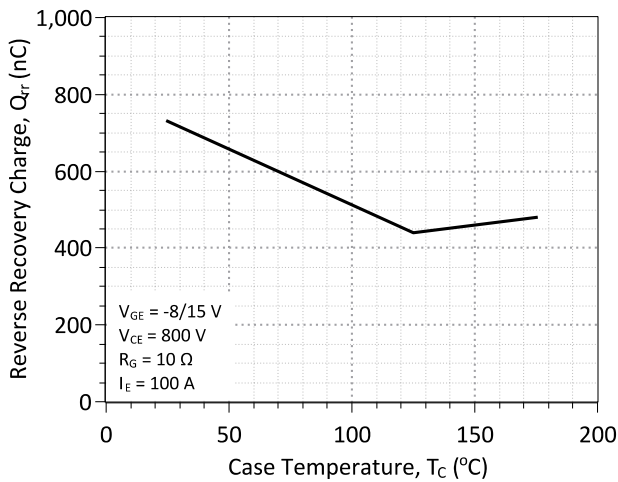


Figure 15: Typical Hard-Switched Reverse Recovery Charge vs. Temperature

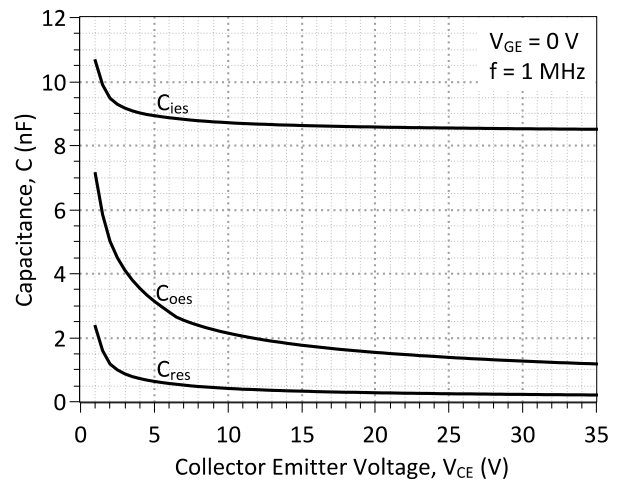
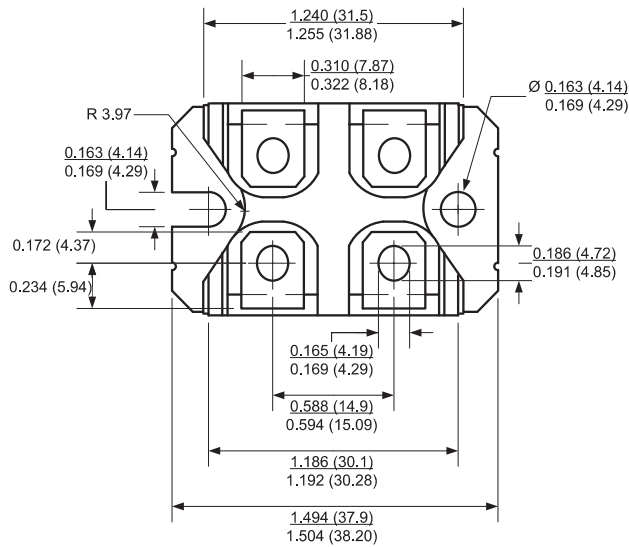
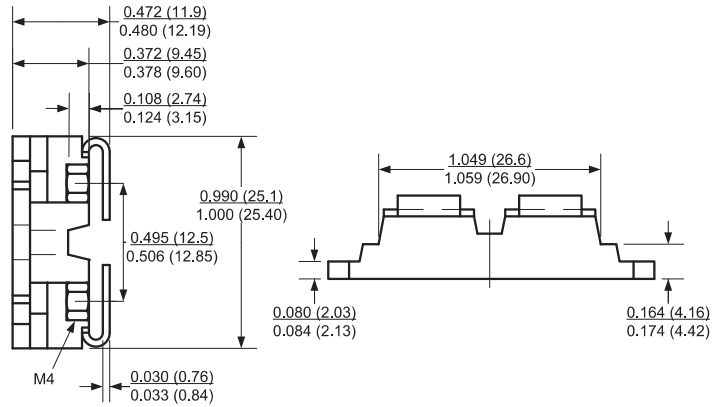


Figure 16: Typical C-V Characteristics

Package Dimensions:
SOT-227

PACKAGE OUTLINE

NOTE

1. CONTROLLED DIMENSION IS INCH. DIMENSION IN BRACKET IS MILLIMETER.
2. DIMENSIONS DO NOT INCLUDE END FLASH, MOLD FLASH, MATERIAL PROTRUSIONS

| Revision History | | | |
|------------------|----------|------------------------------------|----------------|
| Date | Revision | Comments | Supersedes |
| 2013/02/08 | 2 | Updated Electrical Characteristics | |
| 2012/07/30 | 1 | Second generation release | GA100XCP12-227 |
| 2011/01/06 | 0 | Initial release | |

Published by
 GeneSiC Semiconductor, Inc.
 43670 Trade Center Place Suite 155
 Dulles, VA 20166

GeneSiC Semiconductor, Inc. reserves right to make changes to the product specifications and data in this document without notice.

GeneSiC disclaims all and any warranty and liability arising out of use or application of any product. No license, express or implied to any intellectual property rights is granted by this document.

Unless otherwise expressly indicated, GeneSiC products are not designed, tested or authorized for use in life-saving, medical, aircraft navigation, communication, air traffic control and weapons systems, nor in applications where their failure may result in death, personal injury and/or property damage.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru