

# Miniature Snap Switch

## Single Pole

### D4 Series



#### Features

- Choice of standard or light operating force
- Long life coil spring mechanism
- RoHS compliant
- Cadmium free
- Various aux actuators
- Various terminal types
- Agency approved extended life versions available

#### Standard Parts<sup>1</sup> (note "G2" suffix does not affect fit, form or function)

|           |           |           |           |           |           |
|-----------|-----------|-----------|-----------|-----------|-----------|
| D413-R1AA | D429-R1TD | D433-R1AA | D443-R1LD | D449-R1LL | D453-R1RA |
| D413-R1LA | D429-R1AA | D433-R1LD | D443-R1MD | D449-R1MD | D453-R1RD |
| D413-R1LD | D429-R1LD | D433-R1RA | D443-R1RA | D449-R1ML | D459-R1AA |
| D413-R1RA | D429-R1LL | D433-R1RD | D443-R1RD | D449-R1RA | D459-R1LD |
| D419-R1AA | D429-R1MD | D439-R1LL | D449-R1AA | D449-R1RD | D459-R1LL |
| D423-R1RA | D429-R1ML | D439-V1ML | D449-R1LD | D453-B8AA | D459-R1ML |
| D423-R1RD |           | D443-R1AA |           | D453-R1AA |           |

<sup>1</sup>The part number configuration matrix below provides details to the part numbers above. For configurable part numbers that are not listed above, not listed in your region, or for custom part numbers, contact the factory or your distributor. For information on crossing discontinued U.S. only part numbers, see D4 cross-reference chart at [www.switches-sensors.zf.com](http://www.switches-sensors.zf.com).

#### Part Number Breakdown

D413-R1AA

| Series | Contact Rating <sup>2</sup> |       | Configuration <sup>3</sup> |           |                        |   |           |   |           |                 |
|--------|-----------------------------|-------|----------------------------|-----------|------------------------|---|-----------|---|-----------|-----------------|
| D4     | 1                           | 0.1 A | 85 °C                      |           | 125 °C                 |   | 150 °C    |   |           |                 |
|        | 2                           | 3 A   | 1                          | SPST – NO | Standard Op. Force "Y" | G | SPST – NO | S | SPST – NO | Light Op. Force |
|        | 3                           | 5 A   | 2                          | SPST – NC |                        | H | SPST – NC | T | SPST – NC |                 |
|        | 4                           | 10 A  | 3                          | SPDT      |                        | M | SPDT      | U | SPDT      |                 |
|        | 5                           | 15 A  | 7                          | SPST – NO | Light Op. Force "X"    | N | SPST – NO |   |           |                 |
|        | 8                           | 21 A  | 8                          | SPST – NC |                        | P | SPST – NC |   |           |                 |
|        |                             |       | 9                          | SPDT      |                        | R | SPDT      |   |           |                 |

<sup>2</sup>UL AC current rating; see table on reverse for complete details

<sup>3</sup>D48 only available with light operating force

| Terminal Type | Description                                  |
|---------------|--|
| A1            | Welding                                      |
| B8            | Short solder                                 |
| P4            | 1.2 x 0.5 (0.047 x 0.020) PCB, underside*    |
| P5            | 1.2 x 0.5 (0.047 x 0.020) PCB, rear*         |
| PA            | 1.2 x 0.5 (0.047 x 0.020) PCB, housing side* |
| PB            | 1.2 x 0.5 (0.047 x 0.020) PCB, cover side*   |
| Q1            | 4.8 x 0.8 (0.187 x 0.032) QC, straight*      |
| Q3            | 4.8 x 0.8 (0.187 x 0.032) QC, dog leg*       |

\*not available for D48

\*\*not available for D45 or D48

| Terminal Type | mm (inches)                               |
|---------------|---|
| R1            | 4.8 x 0.5 (0.187 x 0.020) QC, straight*   |
| R3            | 4.8 x 0.5 (0.187 x 0.020) QC, dog leg**   |
| S1            | Solder with temp stop                     |
| V1            | 6.3 x 0.8 (0.250 x 0.032) QC, straight    |
| V3            | 6.3 x 0.8 (0.250 x 0.032) QC, dog leg     |
| W9            | Screw*                                    |
| X5            | 1.5 x 0.8 (0.059 x 0.032) QC, 2.5 mm grid |
| Y5            | 6.3 x 0.8 (0.250 x 0.032) QC, 5 mm grid   |

Actuator Type mm (inches)

| Actuator Type | Actuation length                      |
|---------------|---------------------------------------|
| AA            | Button N/A                            |
| JA            | SS lever, standard ratio 21.2 (0.835) |
| JD            | SS lever, standard ratio 35.6 (1.4)   |
| JL            | SS lever, standard ratio 69.9 (2.75)  |
| KA            | SS lever, high ratio 25.7 (1.01)      |
| KD            | SS lever, high ratio 40.1 (1.58)      |
| KL            | SS lever, high ratio 74.4 (2.93)      |
| LA            | Lever, standard ratio 21.2 (0.835)    |
| LD            | Lever, standard ratio 35.6 (1.4)      |
| LL            | Lever, standard ratio 69.9 (2.75)     |

| Actuator Type | Actuation length                            |
|---------------|---|
| MA            | Lever, high ratio 25.7 (1.01)               |
| MD            | Lever, high ratio 40.1 (1.58)               |
| ML            | Lever, high ratio 74.4 (2.93)               |
| RA            | Roller, standard ratio 20.6 (0.811)         |
| RD            | Roller, standard ratio 34.1 (1.34)          |
| SA            | Roller, simulated, rear mount 20.6 (0.811)  |
| TA            | Roller, high ratio 25.1 (0.988)             |
| TD            | Roller, high ratio 38.6 (1.52)              |
| UA            | Roller, simulated, front mount 25.1 (0.988) |

For actuator details, see D4 actuator reference sheet at <http://switches-sensors.zf.com/us/>

[www.switches-sensors.zf.com](http://www.switches-sensors.zf.com) ZF Electronics Systems Pleasant Prairie, LLC ("ZF") acquired the rights to the CHERRY branded switches and sensors in 2008. Although ZF divested its interest in the CHERRY name in 2015, the switches and sensors remain unchanged and are now sold under the ZF brand.



## Electrical Specifications – Contact Ratings

| Contact | EN61058 <sup>4</sup>                                  | UL1054  |
|---------|---|---|
| 1       | 0.1 (0.5) A, 250 VAC; 0.5 A, 30 VDC; 1 (1) A, 250 VAC | 0.1 A, 125/250 VAC; 0.5 A, 30 VDC; 1 A, 125 VAC   |
| 2       | 3 (1) A, 250 VAC                                      | 3 A, 125/250 VAC; 1/10 HP, 250 VAC                |
| 3       | 6 (2) A, 250 VAC                                      | 5 A, 125/250 VAC; ¼ HP, 250 VAC                   |
| 4       | 10 (3) A, 250 VAC                                     | 10 A, 125/250 VAC; 6 A, 30 VDC; ½ HP, 125/250 VAC |
| 5       | 16 (4) A, 250 VAC                                     | 15 A, 125/250 VAC; ½ HP, 125-250 VAC              |
| 8       | 21 (8) A, 250 VAC                                     | 21 A, 250 VAC; 1 HP, 125 VAC; 2 HP, 250 VAC       |

UL file number E314201

<sup>4</sup>D45 with R1 terminals are not 61508 certified

## Environmental and Mechanical Specifications

|   |  |                     |
|---|--|---------------------|
| Operating Temperature                                 | -40 °C to 85, 125 or 150 °C (-40 °F to 185, 257 or 302 °F) |                     |
| Flammability Rating                                   | UL 94V-0   |                     |
| Operating life – electrical life at rated load, 85 °C |  |                     |
|   | Contact  | UL1054 <sup>5</sup> |
|   | 1  | 6,000               |
|   | 2  | 6,000               |
|   | 3  | 6,000               |
|   | 4  | 6,000               |
|   | 5  | 6,000               |
|   | 7  | 6,000               |
|   | EN61058  |                     |
|   | 1  | 50,000              |
|   | 2  | 50,000              |
|   | 3  | 50,000              |
|   | 4  | 50,000              |
|   | 5  | 50,000              |
|   | 7  | 10,000              |

<sup>5</sup>Extended life available





## Material Specifications

|                    |   |
|--------------------|---|
| Case               | Polyamide (PA) 85 °C, Thermoplastic Polyester (PET) 125 or 150 °C             |
| Cover              | Polyamide (PA) 85 °C, Thermoplastic Polyester (PET) 125 or 150 °C             |
| Actuating Button   | Thermoplastic Acetyl (POM) 85 °C, Thermoplastic Polyester (PET) 125 or 150 °C |
| Contacts           | Gold Cross Point (D41), Silver (D42), Silver Alloy (D43-D48)                  |
| Terminals          | Brass   |
| Auxiliary Actuator | Stainless Steel or Cold-Rolled Steel (Nickel Plated)                          |
| Moving Blade       | Silver Plated Brass   |

## Environmental Specifications

|                     |  |
|---------------------|--|
| Ambient Temperature | -40 °C to 85 °C/120 °C (-40 °F to 185 °F/248 °F) |
| Operating Force     | 45 – 400 cN (model dependent, without actuator)  |
| Total Travel        | 1.6 mm   |
| Ingress Protection  | IP40   |

## Dimensions mm (inches) and terminal configurations

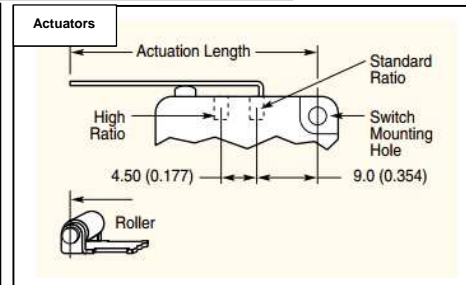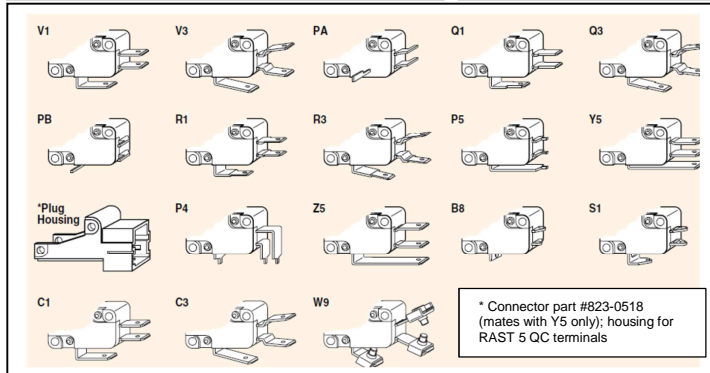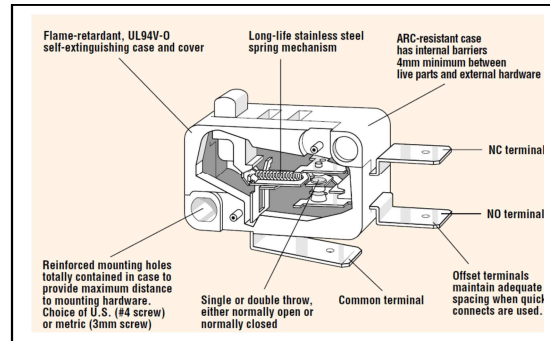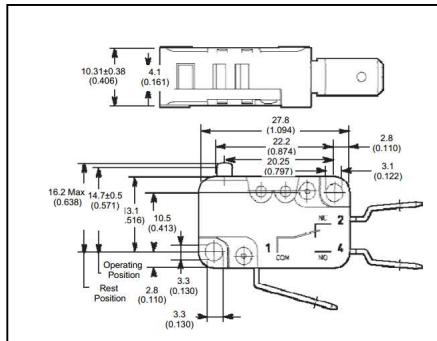

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)