
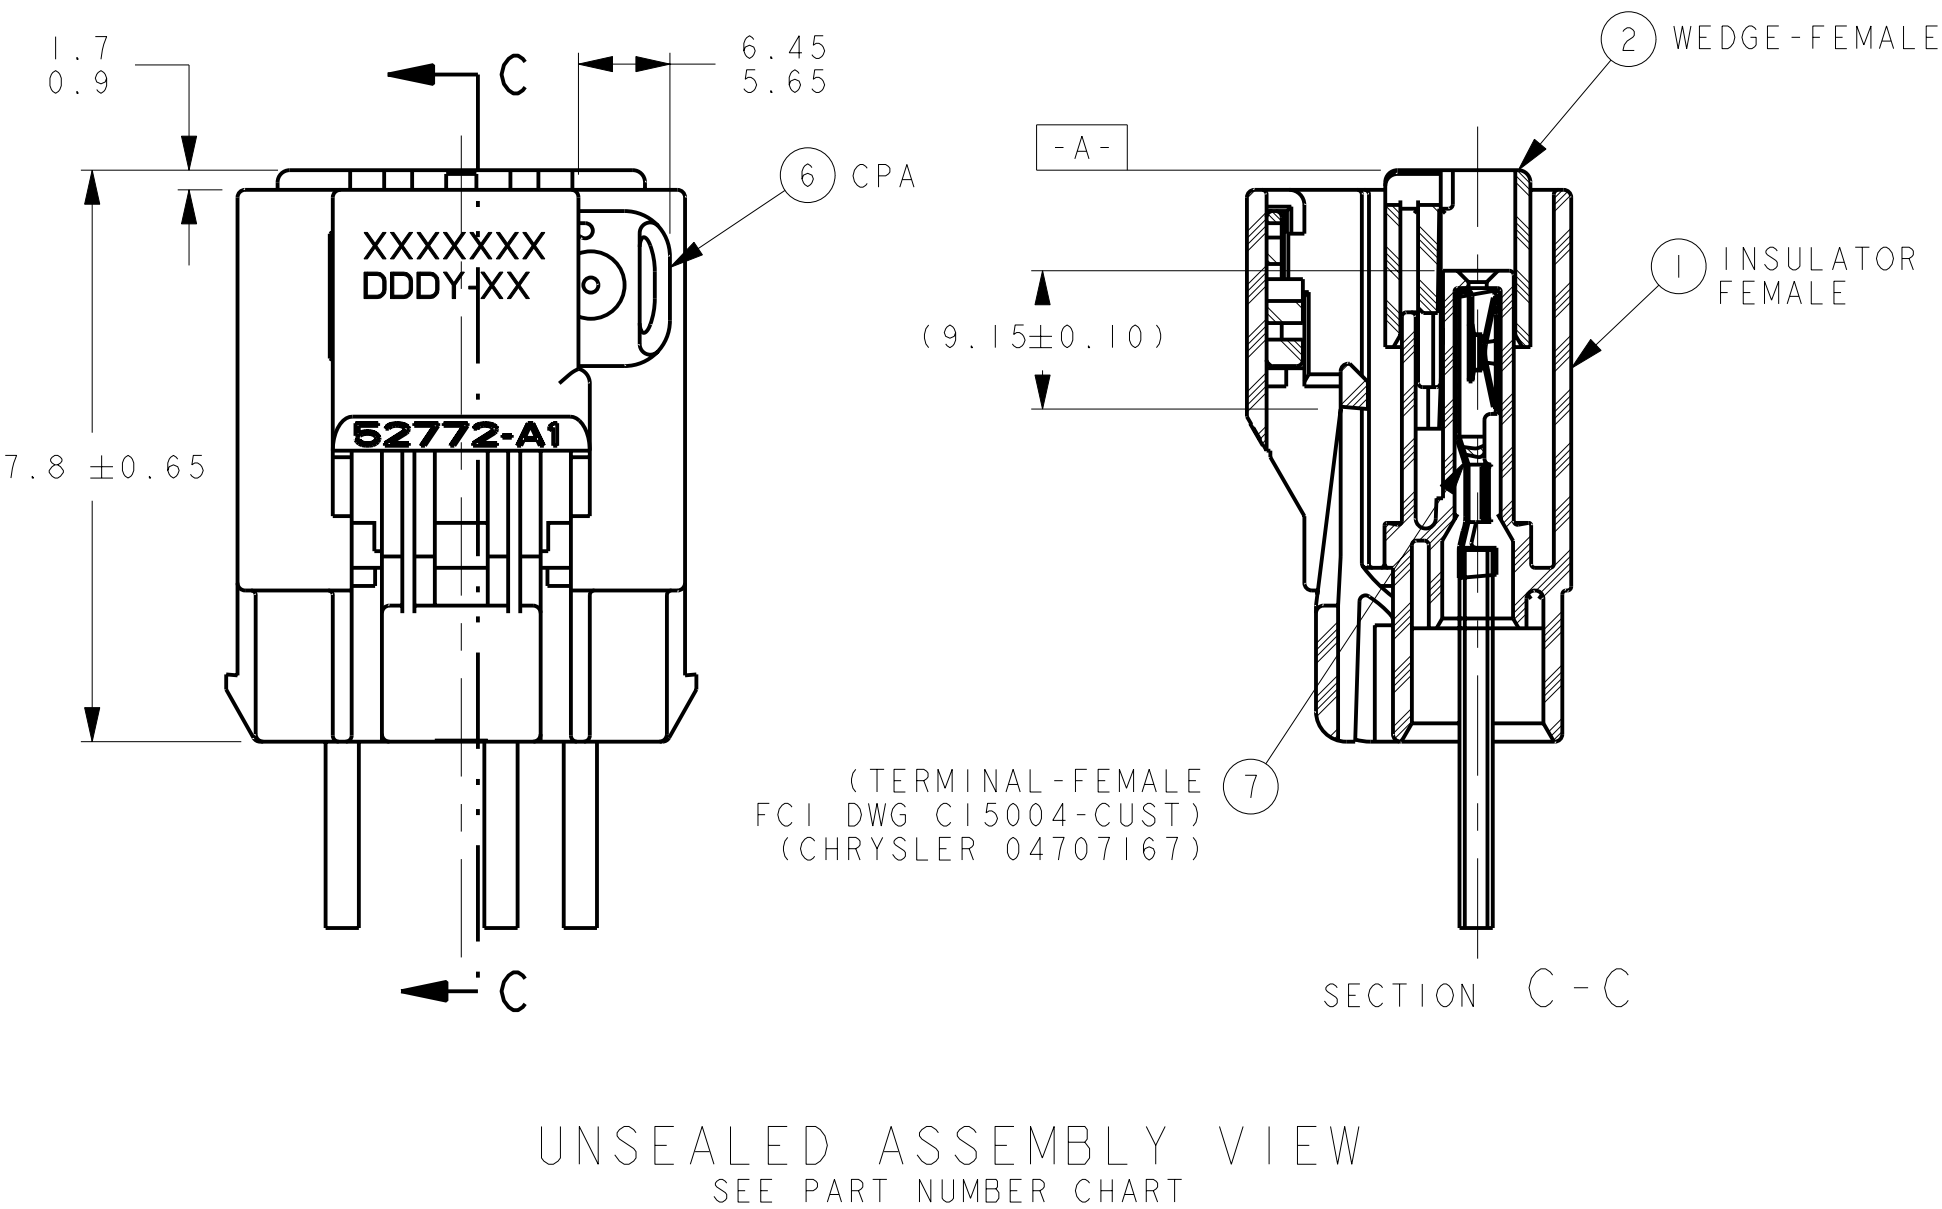
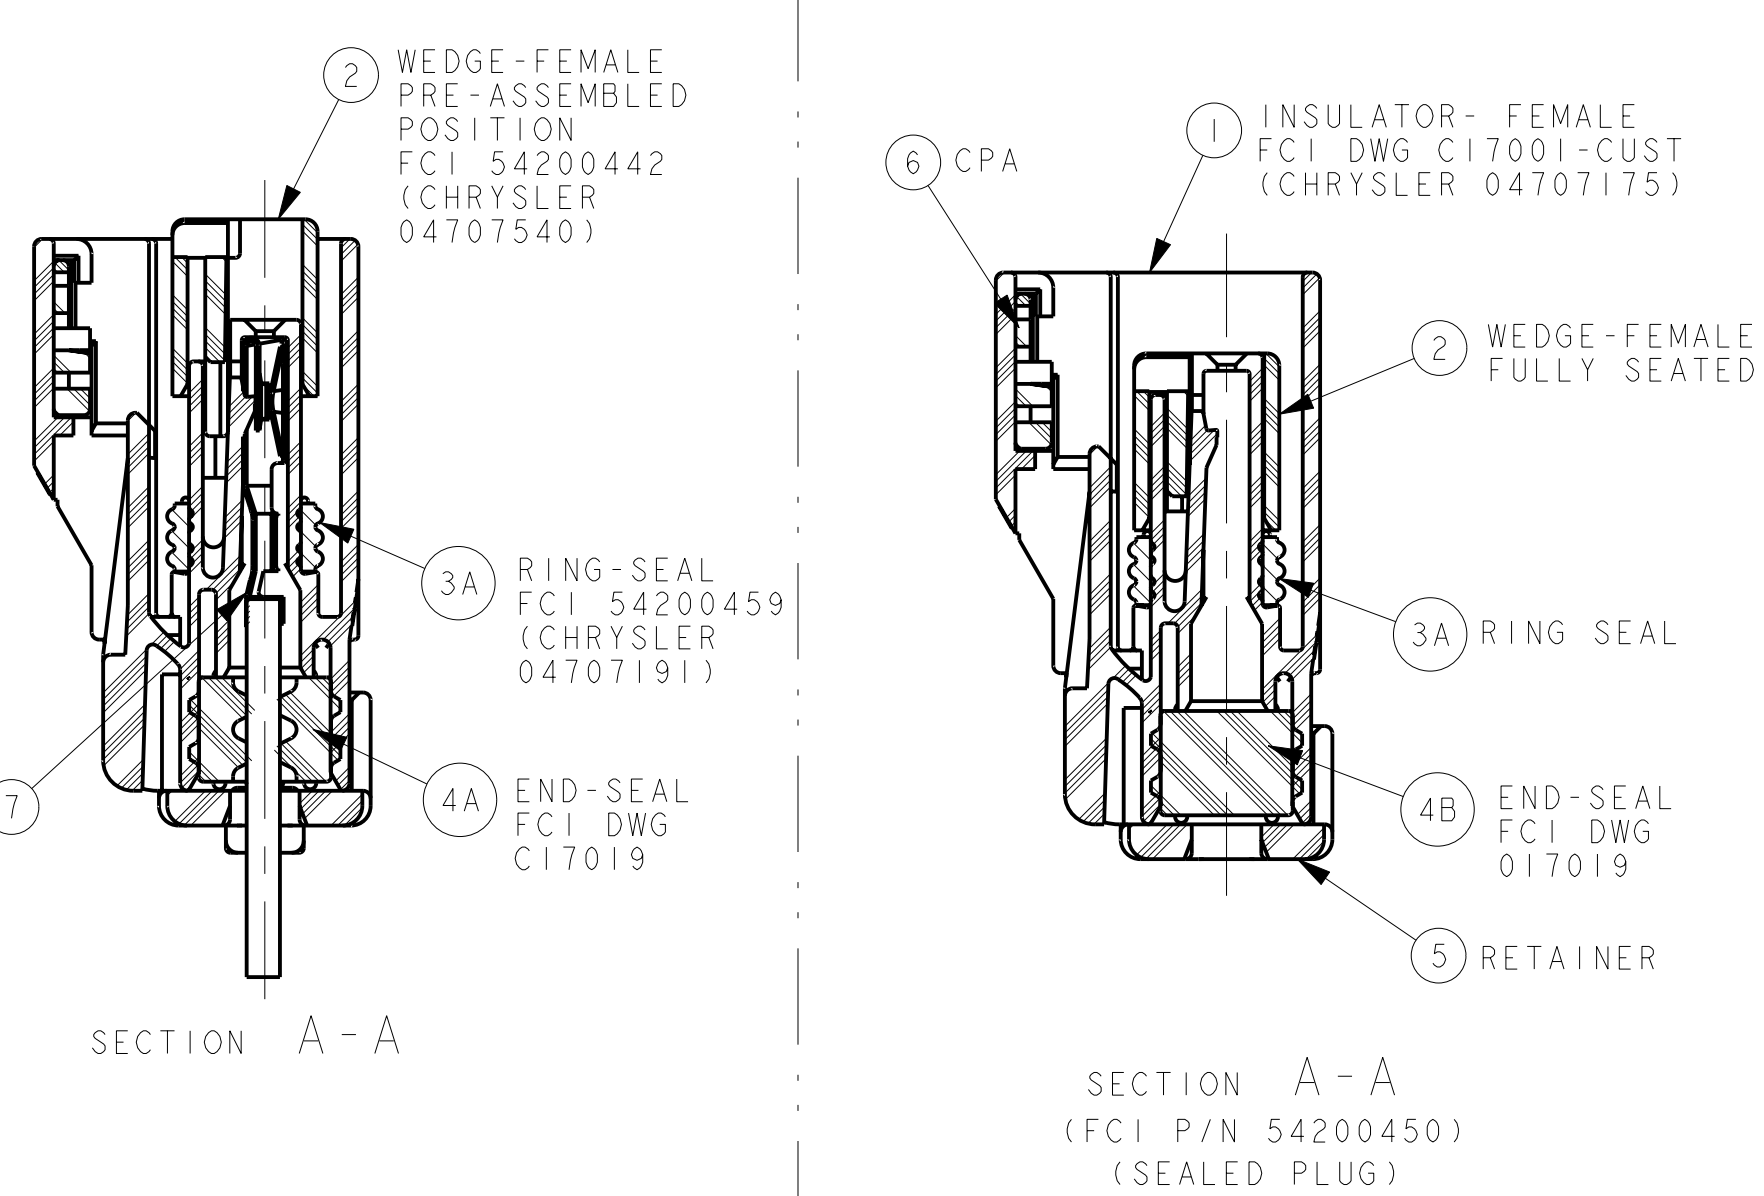
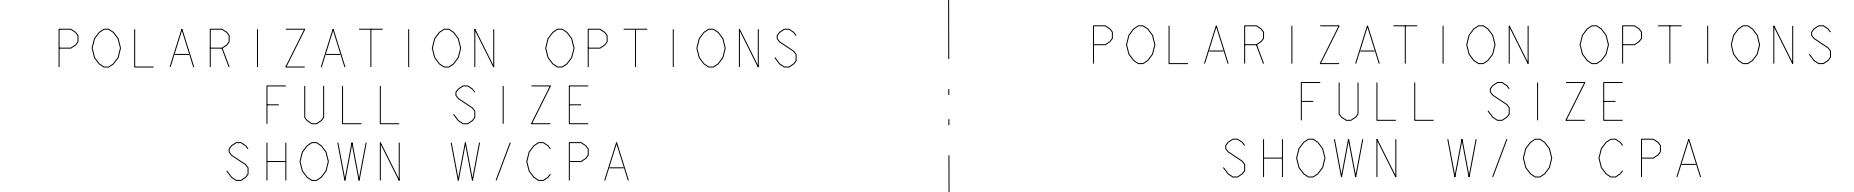


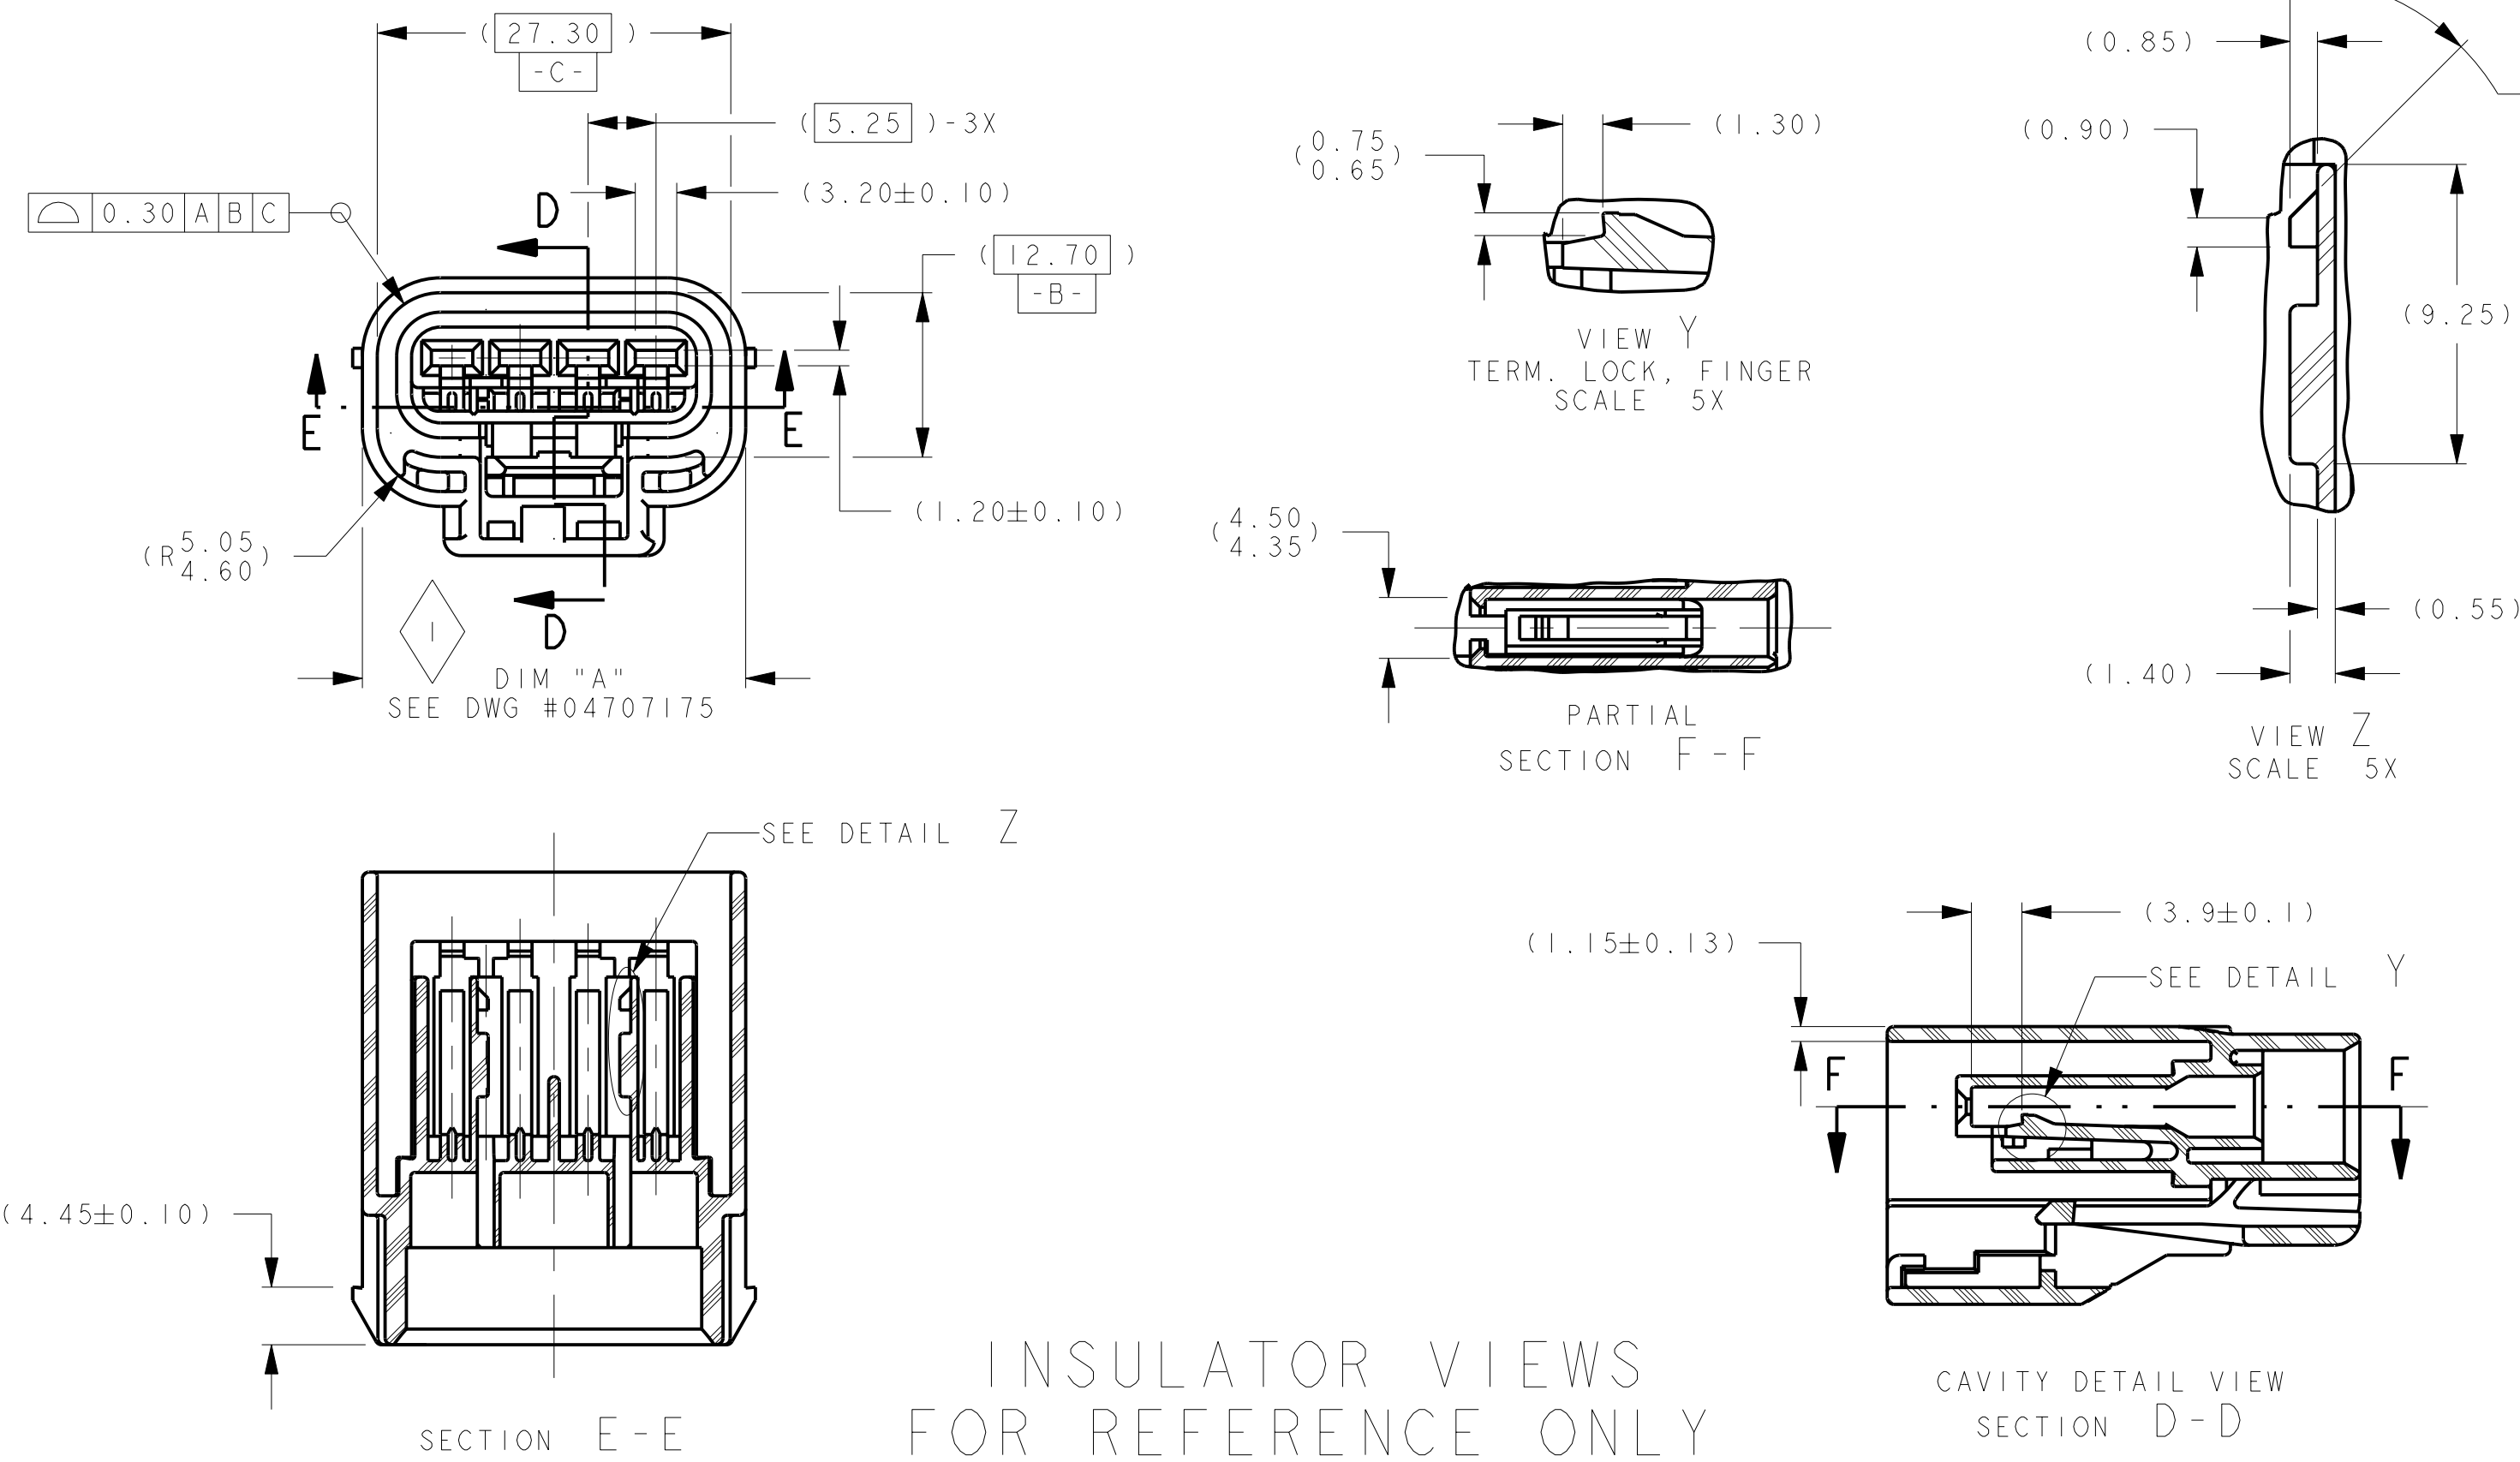

MAX. INSULATION CRIMP WIDTH = 4.50
MAX. INSULATION CRIMP HEIGHT = 4.50
MAX. INSULATION DIA. = 4.09 (10 GA THIN WALL)

1. MUST BE USED WITH FLOUROSILICONE END SEAL FCI P/N 54200430, RETAINER & PROPER GAGE TEFLON WIRES FOR METHANOL OR DIESEL FUEL APPLICATIONS

2. USE WITH CAVITY PLEX FCI P/N 54200005, WHEN REQ'D USE WITH 2.80MM AUGE FEM. TERM. PER C15004-CUST SYM. ABOUT CENTERLINE FOR 180° ORIENTATION

3. TEST METHOD PER SAE/USCAR-2 REV. 5, CONNECTOR ENGAGE & DISENGAGE WITH LATCH DEPRESSED FORCE NOT TO EXCEED 75 N. FOR THIS SYSTEM

CPA SEATING FORCES - 40 N. MAX.

WEDGE SEATING FORCES - 100 N. MAX.

4. SUPPLIER, MOLD & CAVITY I.D. MUST BE LEGIBLE

5. ANNUAL QUALITY REQUIREMENTS:
UT IS PERMISSIBLE TO PERFORM CONTINUOUS CONFORMANCE PER FCI SPECIFICATION #AQA-001 INSTEAD OF ANNUAL LAYOUT & ANNUAL PV REQUIREMENTS OF QS-9000 SECTION 2 & PF-9600

ASSEMBLY PART NUMBER CHART												
UNSEALED						SEALED						
W/O CPA			W/CPA			W/CPA			W/O CPA			
CUSTOMER P/N'S												
54200400N												
54200403N												
54200404N												
54200407N												
54200406N												
54200405N												
54200403N												
54200404N												
54200405N												
54200406N												
54200407N												
54200408N												
54200409N												
54200410N												
54200411N												
54200412N												
54200413N												
54200414N												
54200415N												
54200416N												
54200417N												
54200418N												
54200419N												
54200420N												
54200421N												
54200422N												
54200423N												
54200424N												
54200425N												
54200426N												
54200427N												
54200428N												
54200429N												
54200430N												
54200431N												
54200432N												
54200433N												
54200434N												
54200435N												
54200436N												
54200437N												
54200438N												
54200439N												
54200440N												
54200441N												
54200442N												
54200443N												
54200444N												
54200445N												
54200446N												
54200447N												
54200448N												
54200449N												
54200450N												
54200451N												
54200452N												
54200453N												
54200454N												
54200455N												
54200456N												
54200457N												
54200458N												
54200459N												
54200460N												
54200461N												
54200462N												
54200463N												
54200464N												
54200465N												
54200466N												
54200467N												
54200468N												
54200469N												
54200470N												
54200471N												
54200472N												
54200473N												
54200474N												
54200475N												
54200476N												
54200477N												
54200478N												
54200479N												
54200480N												

ASSEMBLY PART NUMBER CHART												
UNSEALED						SEALED						
W/O CPA			W/CPA			W/CPA			W/O CPA			
CUSTOMER P/N'S												
54200400N												
54200403N												
54200404N												
54200407N												
54200406N												
54200405N												
54200403N												
54200404N												
54200405N												
54200406N												
54200407N												
54200408N												
54200409N												
54200410N												
54200411N												
54200412N												
54200413N												
54200414N												
54200415N												
54200416N												
54200417N												
54200418N												
54200419N												
54200420N												
54200421N												
54200422N												
54200423N												
54200424N												
54200425N												
54200426N												
54200427N												
54200428N												
54200429N												
54200430N												
54200431N												
54200432N												
54200433N												
54200434N												
54200435N												
54200436N												
54200437N												
54200438N												
54200439N												
54200440N												
54200441N												
54200442N												
54200443N												
54200444N												
54200445N												
54200446N												
54200447N												
54200448N												
54200449N												
54200450N												
54200451N												
54200452N												
54200453N												
54200454N												
54200455N												
54200456N												
54200457N												
54200458N												
54200459N												
54200460N												
54200461N												
54200462N												
54200463N												
54200464N												
54200465N												
54200466N												
54200467N												
54200468N												
54200469N												
54200470N												
54200471N												
54200472N												
54200473N												
54200474N												
54200475N												
54200476N												
54200477N												
54200478N												
54200479N												
54200480N												

ASSEMBLY PART NUMBER CHART												
UNSEALED						SEALED						
W/O CPA			W/CPA			W/CPA			W/O CPA			
CUSTOMER P/N'S												
54200400N												
54200403N												
54200404N												
54200407N												
54200406N												
54200405N												
54200403N												
54200404N												
54200405N												
54200406N												
54200407N												
54200408N												
54200409N												

[illegible]

ALL NON-REFERENCE DIMENSIONS ARE REQUIRED

- USE INDEX A: BLACK SEALED AND UNSEALED FOR ALL AFFECTED INSULATOR CAVITIES
- CURRENT PRODUCTION TOOLING
- POINT OF LAST RUN

SERVICE TOOLING GUIDE INFORMATION PER APEX TRAINING MANUAL

△ MUST CONFORM TO THE FOLLOWING CHRYSLER/YNA STANDARDS:

PF-9600 PERFORMANCE (CHRYSLER) EXCEPT AS NOTED ABOVE
PS-7300 QUALITY ASSURANCE (CHRYSLER)
PS-1480-CEK-4 (CHRYSLER) PART 1.D. (G-009-2 YNA)
PS-140 REGRIND (CHRYSLER). (G-009-3 YNA)
PS-9227 DATA EXCHANGE (CHRYSLER). (G-009-7 YNA)
PS-10052 INFORMATION SECURITY (CHRYSLER).

△ THIS DRAWING (HS9003) REPLACES CHRYSLER DRAWING NUMBER 04707254 LEVEL "R"
CHRYSLER DRAWING IS FOR REFERENCE ONLY

△ FCI P/N WITH SUFFIX "N" DESIGNATES ASSEMBLIES W/O CPA

△ P/N'S WITH BURNT ORANGE END SEAL CAN BE USED WITH 12 OR 14 GAGE IN ANY COMBINATION OR ORDER OR THREE 12 GAGE AND ONE 18 GAGE OR ONE 16 GAGE WIRE (ONE END)

[illegible]

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru