



# OSRAM S3030 Quantum Dot Linear Modules

Power of OSRAM in standard and custom LED modules

# Data Sheet

Version 1.0

## Lean & Fast. Made Smarter.

**High CRI efficacy** - 178 lumens per watt at 90 CRI with the ability to achieve DLC certification

**Flexible design** - 22" length that can be seamlessly connected end-to-end

**Color accurate** - great color quality with Rf > 90, Rg > 100 and excellent color over angle uniformity

**Easy to integrate** - designed to Zhaga dimensions and screw hole specifications

**Quick production** - push terminals for quick and simple wiring

## Primary Applications



Indoor lighting

-Office


-Education

-Retail



-Hospitality

-Transportation

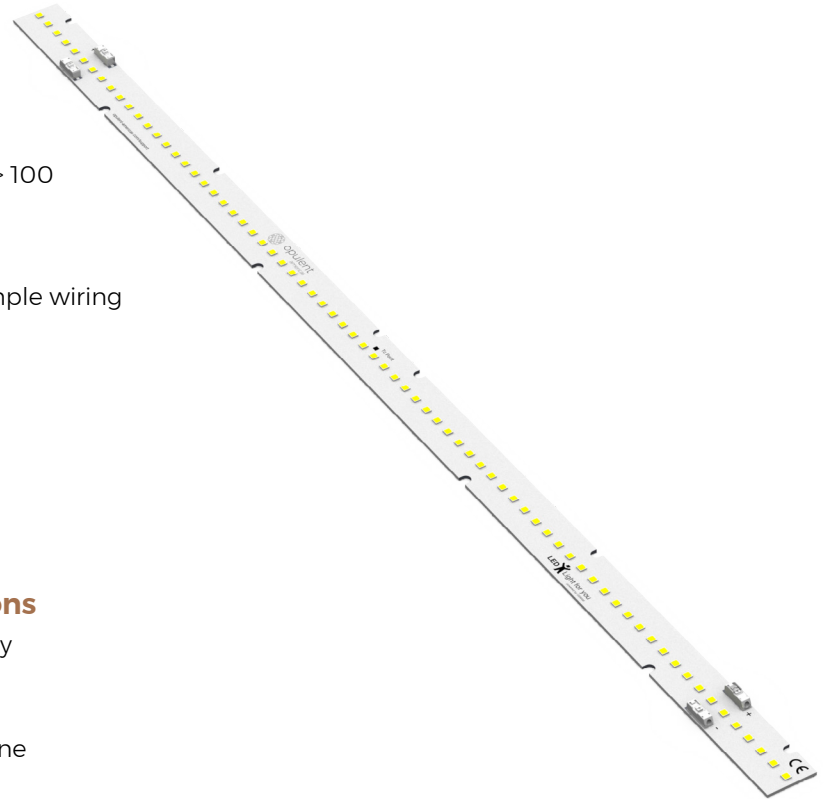

## Superior Performance With Flexible Options

- Industry leading 90 CRI combined with high efficacy
- Private label or custom designs
- Adhesive tape can be added for rapid installation
- Pair with a standard driver for a complete light engine

## Simplify Your Next Lighting Design

Introducing Opulent Americas OSRAM linear LED modules for indoor office, education and retail area lighting fixtures. The modules come in a 22" configuration that is ideal for panel or linear lights.

They are also flexible enough to support a range of specialty indoor applications. Designed to Zhaga standards, Opulent Americas' modules are easy to integrate into existing designs and can be quickly upgraded as LED performance improves.

## Custom Solutions

Opulent Americas operates facilities globally with ISO certifications for the LED lighting, automotive and medical industries. Our North Carolina based office provides quick engineering & sales support with an R&D lab for prototype development and custom solutions. Our in-house global manufacturing capabilities allow for both building in the United States as well as overseas at scale.

## About Opulent Americas

Opulent Americas accelerates the adoption of LED technology through simple, modular products and custom designs. Through 30 years of experience, state of the art manufacturing, full traceability and advanced quality controls, Opulent offers leading solid state lighting components, modules and custom solutions. Opulent customers get to market faster, with less resources, at lower costs. Visit [opulent-americas.com](http://opulent-americas.com) for more information.

# Linear LED Modules from Opulent Americas

## Order Code Formatting

Series	LED Count	LED Code	Color Temperature	Color Rendering Index	Internal Code
SSB1 - Standard Linear LED PCB Assembly	72 - 72 LEDs	F16 - Osconiq S3030 LED	27 - 2700K	90 - 90 CRI	XX
			30 - 3000K		
			35 - 3500K		
			40 - 4000K		

## Electrical Characteristics

Part Number	Forward Voltage (v)		Typical LED Thermal Resistance Junction to Solder Point (K/W) RTh J-HS
	Typical	Maximum	
SSB1-72F16-x	33.0	35.4	8.4

Intended for connection to a class 2 power source with a maximum operating voltage of 50 Vdc

## Maximum Ratings

Part Number	DC Current (A)	Tsp Temp (°C)	Power (W)
SSB1-72F16-x	1.08	105	38.2

## Board Material Properties

Property	Value	Unit
Thickness	.059	in
Construction	FR4	-
Temperature	130	°C
Flame Rating	V-0	-
Copper Thickness	1	oz

# Linear LED Modules from Opulent Americas


## Product Selection Table - 22" Linear Module

Part Number	CCT	CRI	Luminous Flux (lm)		Watts (W)	
			Typ. 390mA	Typ Efficacy (lm/W)	Typ. 390mA	Max 1080mA
SSBI-72F16-2790-00	2700K	90	2196	170.6	12.9	38.2
SSBI-72F16-3090-00	3000K	90	2268	176.2	12.9	38.2
SSBI-72F16-3590-00	3500K	90	2290	177.9	12.9	38.2
SSBI-72F16-4090-00	4000K	90	2304	179.0	12.9	38.2

<sup>(1)</sup> Opulent Americas may ship modules in flux bins higher than the values specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.

<sup>(2)</sup> Luminous Flux Values @ Tj = 65°C

## Mechanical Dimensions

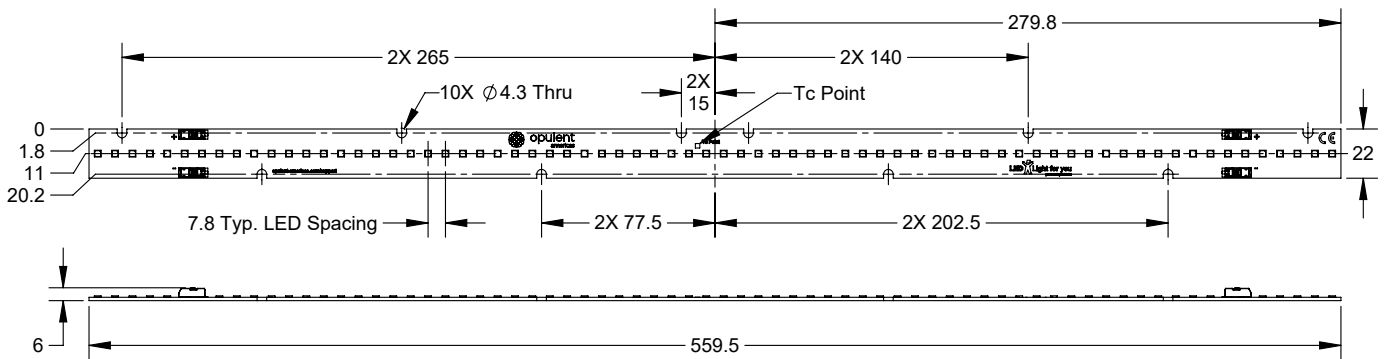

1. Four Poke-In Connectors accept 18-24 AWG solid or stranded wire
2. Recommended Mounting Hardware: 10x M3-5 Socket Head Cap Screws


# Linear LED Modules from Opulent Americas

## Standard White Chromaticity Regions



## Relative Spectral Emission


$\phi_{rel} = f(\lambda); T_s = 25^\circ\text{C}; I_F = 390\text{ mA}$

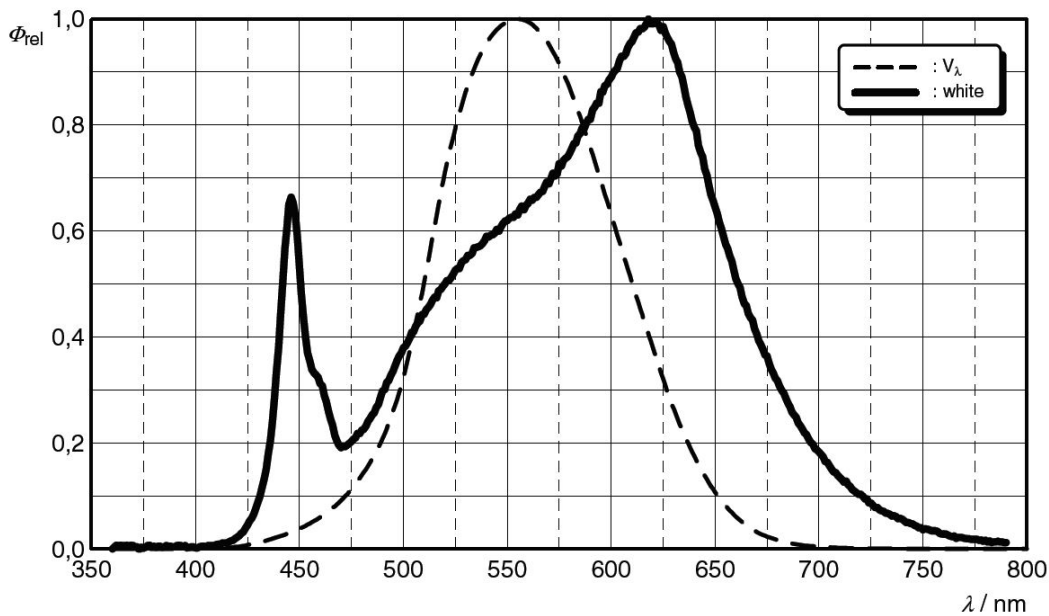

# Linear LED Modules from Opulent Americas

## Radiation Characteristics

$I_{rel} = f(\Phi); T_s = 25\text{ }^\circ\text{C}$

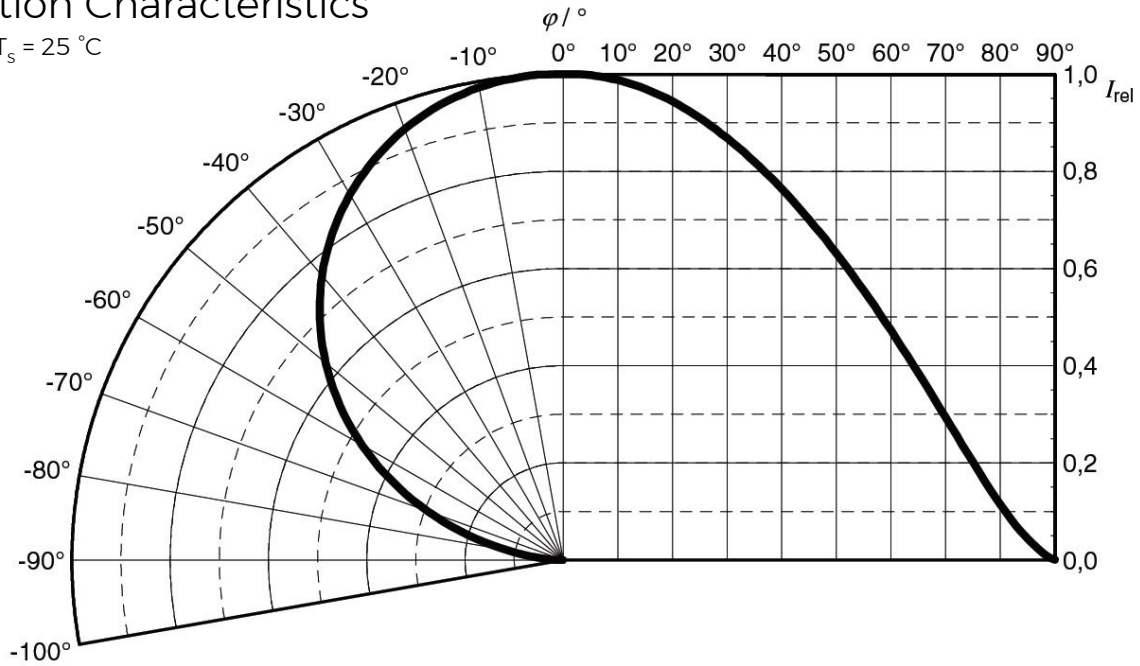


## Forward Current

$I_F = f(V_F); T_s = 25\text{ }^\circ\text{C}$



## Relative Luminous Flux

$\Phi_V / \Phi_V(390\text{ mA}) = f(I_F); T_s = 25\text{ }^\circ\text{C}$

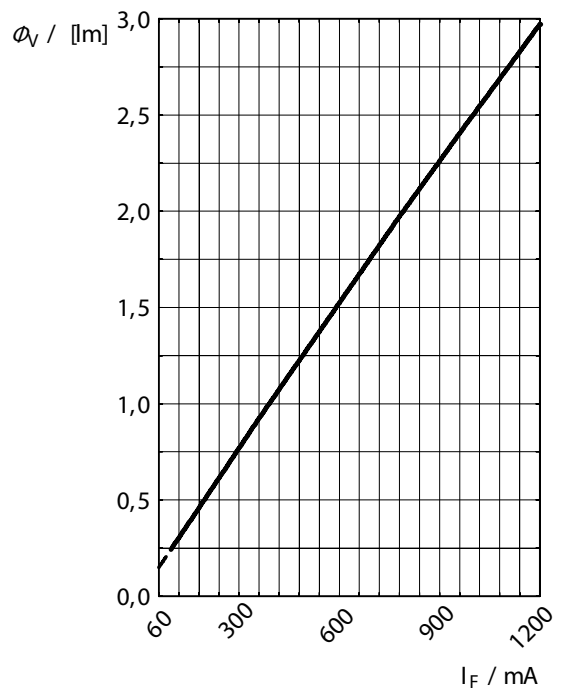

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)