
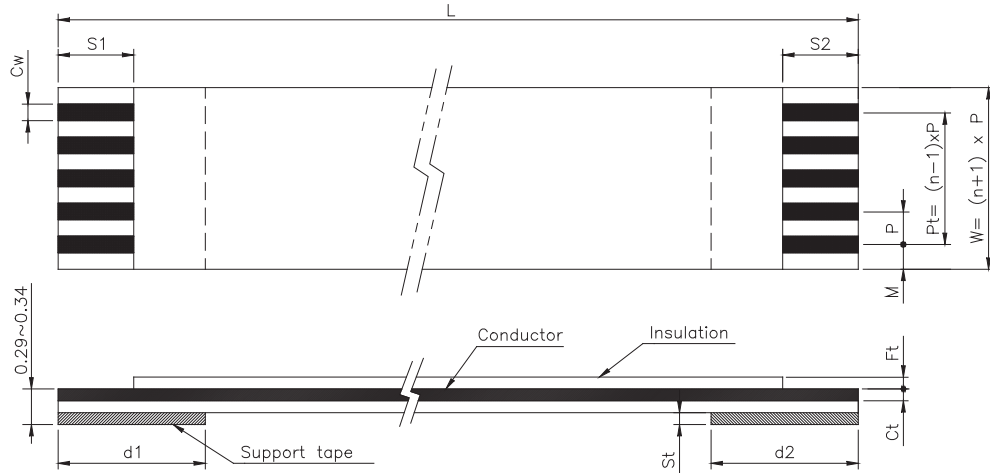





1	2	3	4	5																																																																																								
			TECHNICAL CHARACTERISTICS MATERIAL INSULATOR MATERIAL: PET (WHITE) SUPPORT TAPE: PET (BLUE) CONTACT MATERIAL: COPPER CONTACT PLATING: TIN QUALITY CLASS: 20 MATING CYCLES MIN. PITCH: 0.50 MM ENVIRONMENTAL OPERATING TEMPERATURE: -30°C UP TO 85°C HEAT RESISTANCE: 105°C x 95 HRS FLAMMABILITY RATING UL SUB.758 MOISTURE RESISTANCE: 40°C, 95% RH x 96 HRS COMPLIANCE: LEAD FREE AND ROHS ELECTRICAL CURRENT RATING: 0.5A MAX WORKING VOLTAGE: 60V INSULATION RESISTANCE: >1000 MOHM/M (500 VDC) DIELECTRIC STRENGTH: 500 VAC/MN NO BREAKDOWN CONDUCTOR RESISTANCE: <0.33 OHM/M CONTACT RESISTANCE: <20 mOHMS STANDARD  CERTIFIED: E328849 MECHANICAL ELONGATION OF INSULATOR: >60 % TENSIL STRENGTH OF INSULATION: >3.5KG/MM² FLEXING TEST: 180° >20 TIMES ABRASION: >10000 TIMES PULL/OUT: >20 TIMES PACKAGING BAG DIMENSION & TOLERANCE W= (N+1) x P Pt=(N-1) x P																																																																																									
 Tolerance of Cutting Tilt																																																																																												
TOLERANCE: <table><tr><th>Abbr.</th><th colspan="5">TOLERANCE</th></tr><tr><th></th><th>P=0.5</th><th>P=0.8</th><th>P=1.0</th><th>P=1.25</th><th>P=2.54</th></tr><tr><td>P</td><td>±0.05</td><td>±0.08</td><td>±0.08</td><td>±0.10</td><td>±0.20</td></tr><tr><td>Pt</td><td>±0.08</td><td>±0.10</td><td>±0.10</td><td>±0.15</td><td>+0.2 -0.4</td></tr><tr><td>W</td><td>±0.08</td><td>±0.10</td><td>±0.10</td><td>±0.20</td><td>+0.2 -0.4</td></tr><tr><td>M</td><td>±0.08</td><td>±0.12</td><td>±0.12</td><td>±0.20</td><td>±0.30</td></tr><tr><td>Cw</td><td>±0.02</td><td>±0.03</td><td>±0.03</td><td>±0.03</td><td>±0.04</td></tr><tr><td>L</td><td colspan="5">(30~100)±3, (101~300)±5, (301~600)±10, (Length more than 601mm)±15mm</td></tr></table>			Abbr.	TOLERANCE						P=0.5	P=0.8	P=1.0	P=1.25	P=2.54	P	±0.05	±0.08	±0.08	±0.10	±0.20	Pt	±0.08	±0.10	±0.10	±0.15	+0.2 -0.4	W	±0.08	±0.10	±0.10	±0.20	+0.2 -0.4	M	±0.08	±0.12	±0.12	±0.20	±0.30	Cw	±0.02	±0.03	±0.03	±0.03	±0.04	L	(30~100)±3, (101~300)±5, (301~600)±10, (Length more than 601mm)±15mm					<table><tr><th rowspan="2">No. of PIN</th><th colspan="12">Dimension</th></tr><tr><th>P</th><th>Pt</th><th>L</th><th>W</th><th>M</th><th>Cw</th><th>Ct±0.01</th><th>S1±1.0</th><th>S2±1.0</th><th>d1±2.0</th><th>d2±2.0</th><th>Ft±0.01</th><th>St±0.01</th></tr><tr><td>XX *****</td><td>0.5</td><td>(XX - 1) x P</td><td>LLL *****</td><td>(XX + 1) x P</td><td>0.5</td><td>0.3</td><td>0.035</td><td>4.0</td><td>4.0</td><td>8.0</td><td>8.0</td><td>0.043</td><td>0.225</td></tr></table>		No. of PIN	Dimension												P	Pt	L	W	M	Cw	Ct±0.01	S1±1.0	S2±1.0	d1±2.0	d2±2.0	Ft±0.01	St±0.01	XX *****	0.5	(XX - 1) x P	LLL *****	(XX + 1) x P	0.5	0.3	0.035	4.0	4.0	8.0	8.0	0.043	0.225
Abbr.	TOLERANCE																																																																																											
	P=0.5	P=0.8	P=1.0	P=1.25	P=2.54																																																																																							
P	±0.05	±0.08	±0.08	±0.10	±0.20																																																																																							
Pt	±0.08	±0.10	±0.10	±0.15	+0.2 -0.4																																																																																							
W	±0.08	±0.10	±0.10	±0.20	+0.2 -0.4																																																																																							
M	±0.08	±0.12	±0.12	±0.20	±0.30																																																																																							
Cw	±0.02	±0.03	±0.03	±0.03	±0.04																																																																																							
L	(30~100)±3, (101~300)±5, (301~600)±10, (Length more than 601mm)±15mm																																																																																											
No. of PIN	Dimension																																																																																											
	P	Pt	L	W	M	Cw	Ct±0.01	S1±1.0	S2±1.0	d1±2.0	d2±2.0	Ft±0.01	St±0.01																																																																															
XX *****	0.5	(XX - 1) x P	LLL *****	(XX + 1) x P	0.5	0.3	0.035	4.0	4.0	8.0	8.0	0.043	0.225																																																																															
<table><tr><th colspan="4">RoHS Compliant</th></tr><tr><td>G</td><td></td><td></td><td></td></tr><tr><td>F</td><td></td><td></td><td></td></tr><tr><td>E</td><td>27-FEB-12</td><td>OHMS</td><td>GG</td></tr><tr><td>D</td><td>02-SEPT-11</td><td>MARKING</td><td>GG</td></tr><tr><td>C</td><td>28-SEP-10</td><td>TEMPERATURE</td><td>GG</td></tr><tr><td>B</td><td>27-OCT-09</td><td>STANDARD</td><td>JP</td></tr><tr><td>A</td><td>03-FEB-09</td><td>PDF</td><td>CH</td></tr><tr><td>REV</td><td>DATE</td><td>FILE</td><td>BY</td></tr></table>			RoHS Compliant				G				F				E	27-FEB-12	OHMS	GG	D	02-SEPT-11	MARKING	GG	C	28-SEP-10	TEMPERATURE	GG	B	27-OCT-09	STANDARD	JP	A	03-FEB-09	PDF	CH	REV	DATE	FILE	BY	<table><tr><td>PROJECTION:</td><td>GENERAL TOLERANCE</td><td rowspan="5"> WÜRTH ELEKTRONIK </td></tr><tr><td></td><td>.X = +/_ 0.2 .XX = +/_ 0.15</td></tr><tr><td>APPROVAL: RJ</td><td>UNIT: MM</td><td>DESCRIPTION: 0.50MM FLAT FLEXIBLE CABLE TYPE 1</td></tr><tr><td></td><td>SCALE:</td><td>XX NB OF PIN: / LLL OVERALL LENGTH: MM</td></tr><tr><td></td><td>SHEET: 1/1</td><td>WERI PART NO: 687 6 002</td></tr><tr><td></td><td>DRAW: CH</td><td>XX X L L L</td></tr></table>		PROJECTION:	GENERAL TOLERANCE	 WÜRTH ELEKTRONIK		.X = +/_ 0.2 .XX = +/_ 0.15	APPROVAL: RJ	UNIT: MM	DESCRIPTION: 0.50MM FLAT FLEXIBLE CABLE TYPE 1		SCALE:	XX NB OF PIN: / LLL OVERALL LENGTH: MM		SHEET: 1/1	WERI PART NO: 687 6 002		DRAW: CH	XX X L L L																																			
RoHS Compliant																																																																																												
G																																																																																												
F																																																																																												
E	27-FEB-12	OHMS	GG																																																																																									
D	02-SEPT-11	MARKING	GG																																																																																									
C	28-SEP-10	TEMPERATURE	GG																																																																																									
B	27-OCT-09	STANDARD	JP																																																																																									
A	03-FEB-09	PDF	CH																																																																																									
REV	DATE	FILE	BY																																																																																									
PROJECTION:	GENERAL TOLERANCE	 WÜRTH ELEKTRONIK																																																																																										
	.X = +/_ 0.2 .XX = +/_ 0.15																																																																																											
APPROVAL: RJ	UNIT: MM		DESCRIPTION: 0.50MM FLAT FLEXIBLE CABLE TYPE 1																																																																																									
	SCALE:		XX NB OF PIN: / LLL OVERALL LENGTH: MM																																																																																									
	SHEET: 1/1		WERI PART NO: 687 6 002																																																																																									
	DRAW: CH	XX X L L L																																																																																										
			SIZE A4																																																																																									

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru