

# COMPACT POWER RELAY

## 1 POLE - 30A (For Automotive Applications)

### FBR53 Series

#### ■ FEATURES

- Compact for high density packaging
- High contact capability (30A continuous)
- High temperature grade (-40°C to 125°C)
- Contact arrangement Form U (form A)
- 60A inrush
- Coil wire temp. class F



#### ■ PARTNUMBER INFORMATION

[Example]     FBR53     N     D12     -     Y  
                   (a)        (b)        (c)        (d)

|     |                    |  |
|-----|--------------------|--|
| (a) | Relay type         | FBR53 : FBR53 Series                           |
| (b) | Enclosure          | N : Plastic sealed                             |
| (c) | Coil rated voltage | D12 : 9...12VDC<br>Coil rating table at page 3 |
| (d) | Contact material   | Y : Silver-tin oxide                           |

Actual marking does not carry the type name: "FBR"

E.g.: Ordering code: FBR53ND12-Y;                    Actual marking: 53ND12-Y

# FBR53 SERIES

## ■ SPECIFICATION

| Item         | FBR53                        |  |  |
|--------------|------------------------------|--|--|
| Contact Data | Configuration                | Form U   |  |
|              | Material                     | Silver-tin oxide (AgSnO <sub>2</sub> )                                       |  |
|              | Voltage drop                 | Max. 100 mV at 1A (12VDC open contact voltage)<br>Average 1.5mΩ at 7A, 12VDC |  |
|              | Contact rating               | 14VDC, 25A (resistive load)  |  |
|              | Max. carrying current        | 30A continuous (15A each contact) at 25 °C                                   |  |
|              | Max. inrush current          | 60A (30A each contact) at 25 °C  |  |
|              | Min. switching load *        | 6 VDC, 1A  |  |
| Life         | Mechanical                   | Min.10 x 10 <sup>6</sup> operations (with no load for contact)               |  |
|              | Electrical                   | Min.100 x 10 <sup>3</sup> operations, 14VDC, 20A (resistive load)            |  |
| Coil Data    | Rated power                  | 600 mW   |  |
|              | Operate power                | 220 mW   |  |
|              | Operating temperature range  | -40 °C to +125 °C (no frost)   |  |
|              | Storage temperature range    | -40 °C to +125 °C (no frost)   |  |
|              | Operating humidity           | 45 to 85% RH   |  |
|              | Coil wire temp. class        | F  |  |
| Timing Data  | Operate (at nominal voltage) | Max. 10 ms   |  |
|              | Release (at nominal voltage) | Max. 5 ms (no diode)   |  |
| Insulation   | Resistance (initial)         | Minimum 100 M Ω  |  |
|              | Dielectric strength          | Open contacts  | 500 VAC (50/60 Hz) 1min.   |
|              |                              | Contacts to coil   | 500 VAC (50/60 Hz) 1min.   |
| Other        | Vibration resistance         | Misoperation   | 10 to 55Hz double amplitude 1.5mm, direction X, Y, Z   |
|              |                              | Endurance  | 10 to 100Hz double amplitude 1.5mm, direction X, Y, Z<br>No damage (mechanical and electrical) after test.<br>Coil energizing: 1 hr each direction,<br>Coil not energized: 1 hr each direction       |
|              | Shock                        | Misoperation   | 100m/s <sup>2</sup> (11ms), direction X, Y, Z  |
|              |                              | Endurance  | 1,000m/s <sup>2</sup> (11ms), direction X, Y, Z, each 6 shocks.<br>No damage (mechanical and electrical) after test.<br>Coil energizing: 3 shocks.<br>Coil not energized: 3 shocks, total 36 shocks. |
|              | Terminal                     | Solderability  | At 270 ± 10 °C for 3 ± 0.5sec.   |
|              |                              | Strength   | 9.8N (1 Kgf) Pull force in longitudinal direction for 10 sec.  |
|              | Weight                       | Approximately 6 g  |  |
|              | Sealing                      | Sealed, cat III  |  |

\* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.







# FBR53 SERIES

## ■ COIL RATING



| Coil Code | Rated Coil Voltage (VDC) | Coil Resistance +/- 10% (Ohm) | Must Operate Voltage (VDC) * | Must Release Voltage (VDC) * |
|-----------|--------------------------|-------------------------------|------------------------------|------------------------------|
| D09       | 9                        | 135                           | 5.4                          | 0.7                          |
|           |                          |                               | 6.8 (at 85 °C)               | 0.9 (at 85 °C)               |
| D10       | 10                       | 180                           | 6.3                          | 0.8                          |
|           |                          |                               | 7.9 (at 85 °C)               | 1.0 (at 85 °C)               |
| D12       | 12                       | 240                           | 7.3                          | 1.0                          |
|           |                          |                               | 9.2 (at 85 °C)               | 1.3 (at 85 °C)               |

Note: All values in the table are valid for 20°C and zero contact current, unless otherwise indicated.  
 \* Specified operate values are valid for pulse wave voltage.

## ■ REFERENCE DATA

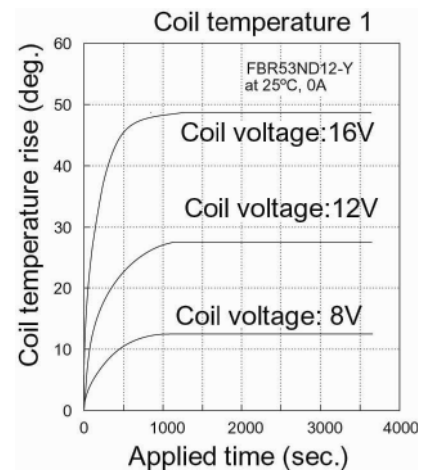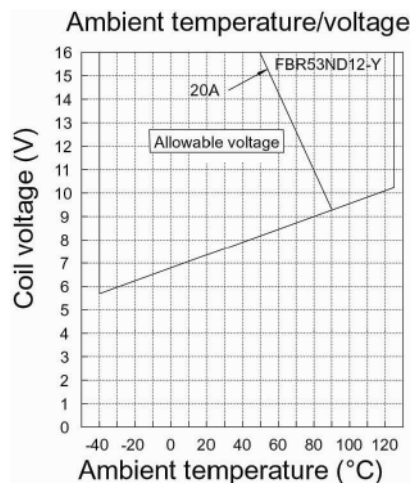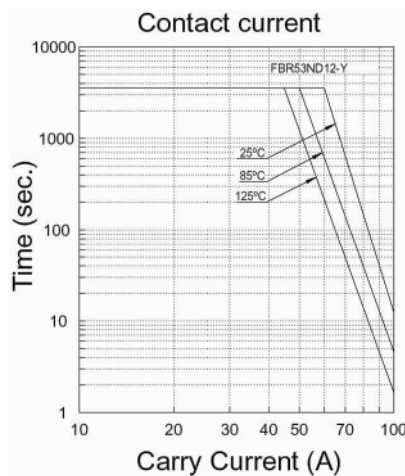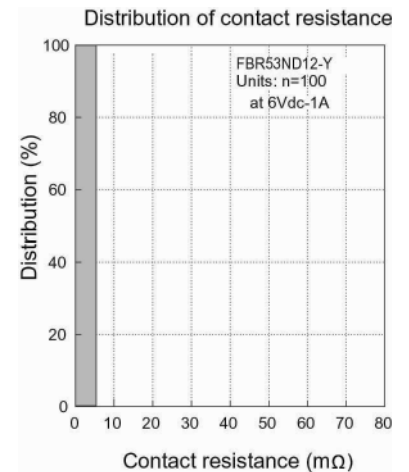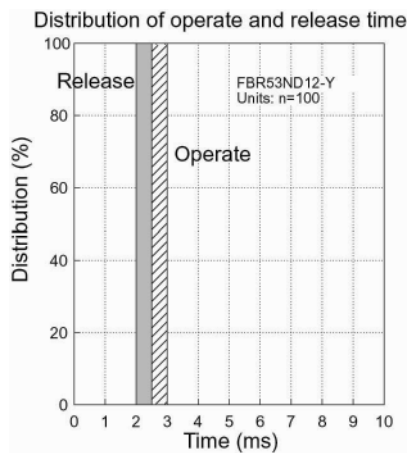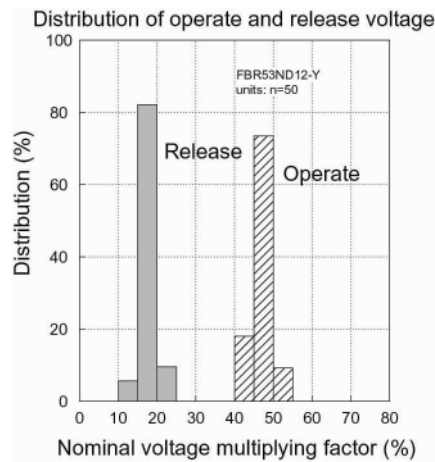


# FBR53 SERIES

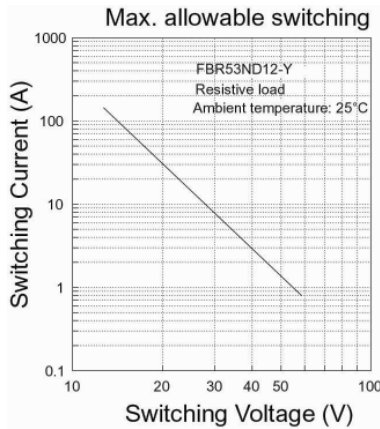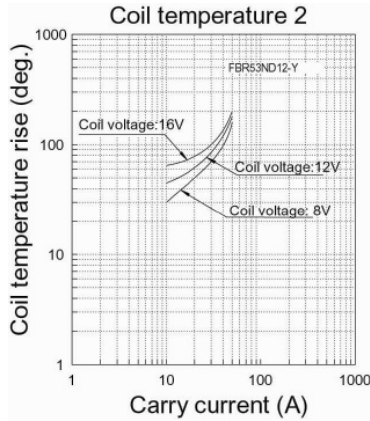


## ■ DIMENSIONS


### ● Dimensions

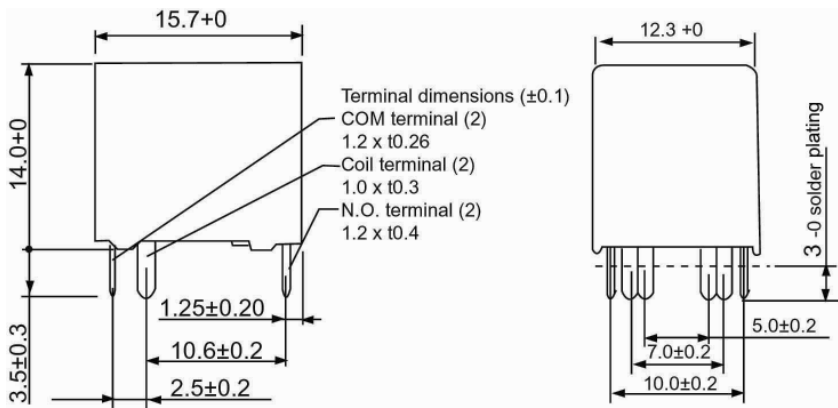

### ● Schematics (BOTTOM VIEW)

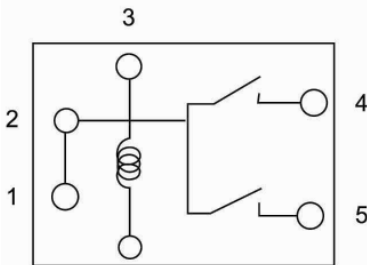


### ● Mounting hole layout (BOTTOM VIEW)

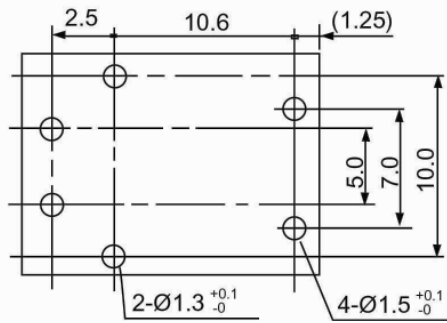

Unit: mm

### ● Tube carrier (pokayoke)

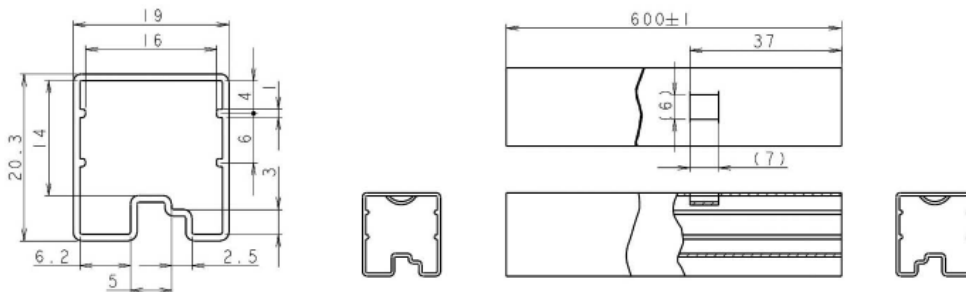

Unit: mm

## RoHS Compliance and Lead Free Information

### 1. General Information

- All automotive relays produced by Fujitsu Components are compliant with RoHS directive 2002/95/EC including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives on October 21st, 2005. (Amendment to Directive 2002/95/EC)
- All our automotive relays are lead-free.
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.

### 2. Recommended Lead Free Solder Profile

- Recommended solder Sn-3.0Ag-0.5Cu.

**Flow Solder condition:**

Pre-heating: maximum 120°C  
Soldering: dip within 5 sec. at  
260°C solder bath

**Solder by Soldering Iron:**

Soldering Iron  
Temperature: maximum 360°C  
Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to through hole mounted electromechanical relays, unless otherwise indicated.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
Web: <http://us.fujitsu.com/components>

### Europe

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#01-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2011 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. January 10, 2011

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)