



A Teledyne Technologies Company

## ZD24CC Series


500mA, 80 Vdc Optically Isolated  
Short-Circuit Protected with Trip Status

Part Number	Description
ZD24CC*	500mA, 80 Vdc short-circuit protected up to 60 Vdc, solid-state relay for through-hole mounting
SZD24CC*	500mA, 80 Vdc short-circuit protected up to 60 Vdc, solid-state relay for surface mount

\*No suffix: Room temperature electrical testing only

W suffix: load conditioning, temperature cycling and 25°C parametric testing

T suffix: load conditioning, temperature cycling, burn-in and 3-temperature parametric testing

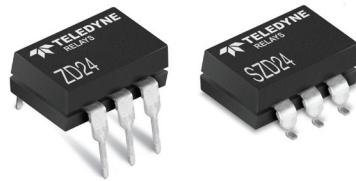

### ELECTRICAL SPECIFICATIONS (-55°C to +105°C ambient temperature unless otherwise specified)

#### INPUT (CONTROL) SPECIFICATIONS

	Min	Max	Units
Input Current	8	20	mA
Input Voltage @ 10 mA	2	3	Vdc
Must Turn-On Current	8		mA
Must Turn-Off Current		100	µA
Must Turn-Off Voltage		0.8	Vdc
Reverse Polarity	-6		Vdc

#### OUTPUT (LOAD) SPECIFICATIONS

	Min	Max	Units
Load Voltage Range	0	80	Vdc
Output Current Rating (See Figure 5)	500		mA
Leakage Current at Rated Voltage	10		µA
Transient Blocking Voltage @25°C	100		Vdc
Output Capacitance @25Vdc (25°C)	600		pF
Output Voltage Drop @500mA	0.5		Vdc
On Resistance	1.0		Ohm
Turn-On Time	2.0		ms
Turn-Off Time	1.0		ms
Trip Overload	(See Figure 6)		A
Short-Circuit Protection	60		Vdc

#### STATUS SPECIFICATIONS

	Min	Max	Units
Status Leakage Current @ 15 Vdc	5		µA
Status Blocking Voltage	32		Vdc
Status "On" Voltage @ 10 mAdc	0.4		Vdc
Status "On" Current	10		mA

#### FEATURES/BENEFITS

- Short-circuit protected
- Overload protected
- Trip status
- Low off-state leakage
- Optical isolation
- Compact 6-pin package

#### DESCRIPTION

ZD24CC Series Relays have optical isolation between relay input and output. Loads may be connected to either the positive or negative output terminals. ZD24CC Relays act as electronic circuit breakers that sense shorted loads or other overload events and then trip-off. Relay contacts open and no current flows through the relay and associated loads. These relays prevent overcurrent damage to the system. ZD24CC Series Relays have Trip Status to indicate a latched-off relay condition. Cycling the relay on-off removes the tripped or latched-off condition and returns the relay to the normal operating state.

#### STATUS OUTPUT TRUTH TABLE

Output (Switch) State	Status Output Level
Tripped	Low ( $\leq 0.4$ Vdc)
Not Tripped	High (open collector)

# ZD24CC Series

500mA, 80 Vdc Optically Isolated  
Short-Circuit Protected with Trip Status


## GENERAL SPECIFICATIONS

(+25°C ambient temperature unless otherwise specified)

## ENVIRONMENTAL SPECIFICATIONS

	Min	Max	Units
Operating Temperature	-55	+105	°C
Storage Temperature	-55	+125	°C
Junction Temperature @0.5A		+125	°C
Thermal Resistance $\theta_{JA}$		125	°C/W
Dielectric Strength	1000		Vac
Insulation Resistance (@500 Vdc)	$10^9$		Ohm
Input to Output Capacitance	5	pF	
Shock	MIL STD 202, method 213, cond. F, 1500 g		
Vibration	MIL STD 202, method 204, cond. F, 1500 g		
Resistance to Soldering Heat	MIL STD 202, method 210		
Solderability	MIL STD 202, method 208		
Thermal Shock	MIL STD 202, method 107		

## MECHANICAL SPECIFICATIONS

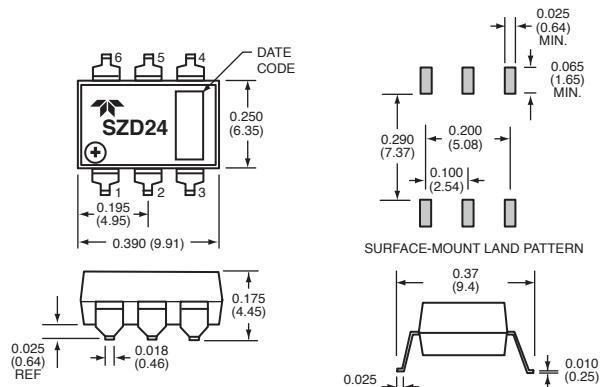

Weight: 0.035 oz. (1g) maximum  
Case: 6-pin, dual-in-line, filled epoxy

TOLERANCES: XX =  $\pm 0.010$  ( $\pm 0.25$ ), XXX =  $\pm 0.005$  ( $\pm 0.13$ )  
CONTROLLING DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE SUPPLIED FOR REFERENCE ONLY.


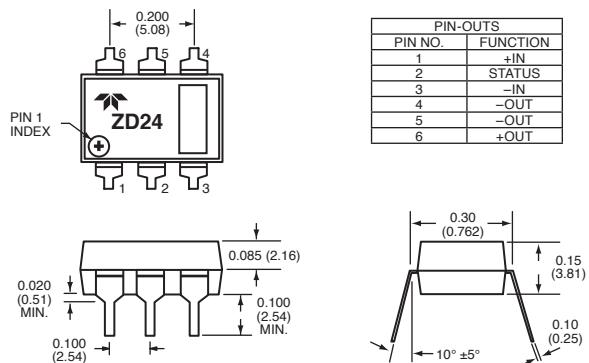


Figure 1

## TYPICAL WIRING DIAGRAM

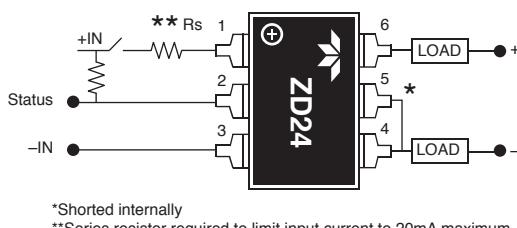

\*Shorted internally

\*\*Series resistor required to limit input current to 20mA maximum

Figure 2

## CONTROL CURRENT VS. INPUT VOLTAGE

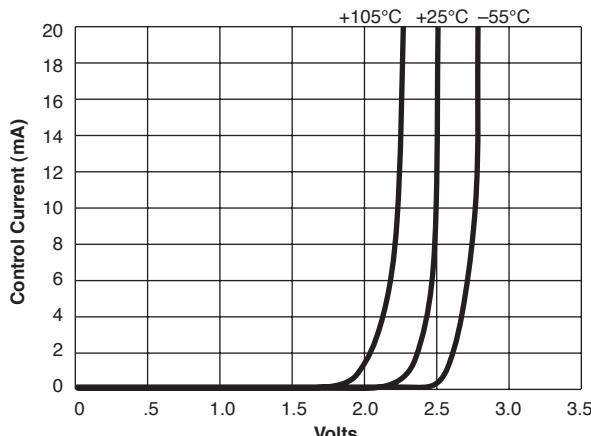


Figure 3

## TURN-ON TIME VS. INPUT CURRENT

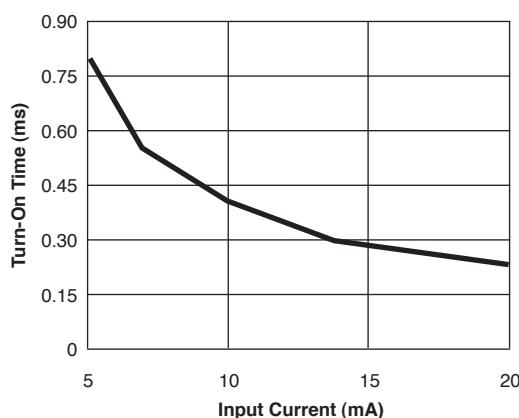
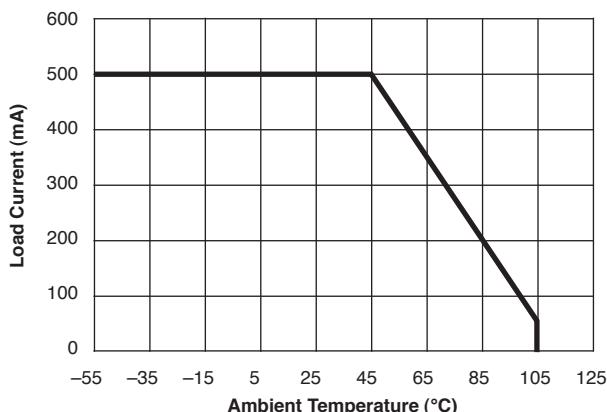
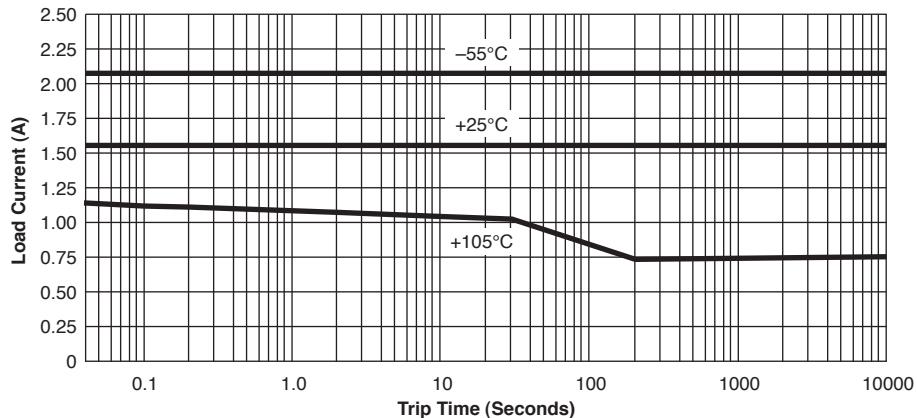
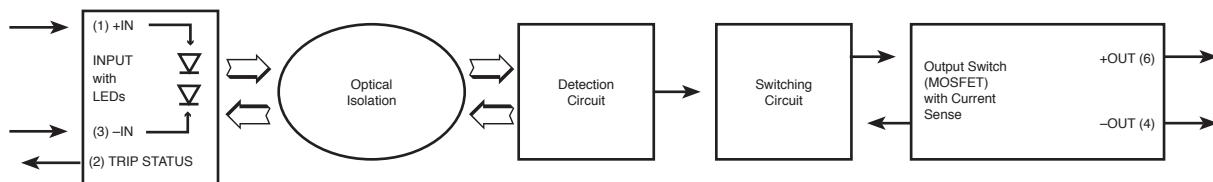


Figure 4

**LOAD CURRENT VS. AMBIENT TEMPERATURE**

*Figure 5*
**TYPICAL OVERLOAD TRIP CURRENT VS. TIME**

*Figure 6*
**FUNCTIONAL BLOCK DIAGRAM**

*Figure 7*
**NOTES:**

1. The ZD24CC relay's input current should be limited to between 8 and 20mA. An external resistor whose value =  $(V_{IN} - 2.5 \text{ volts}) \div 0.012 \text{ Amps}$  is a good choice for limiting input current.
2. Relay input transitions should be less than 1.0 millisecond.
3. Loads may be attached to either the positive or negative output terminal.
4. Maximum load current ratings are with the relay in free air and soldered to a printed circuit board.
5. Timing is measured from the input current transition to the 10% or 90% points on the output voltage transition.
6. Overload conditions (including shorted loads) are specified for load supply voltages to 60 Vdc maximum.
7. For through-hole-PCB-solder-attaching ZD24CC Series Relays, the wave-solder or solder pot operations are limited to +260°C maximum for 10 seconds, maximum.
8. For surface-mount-solder-attaching SZD24CC Series Relays, in IR heating or convection heating systems, the component temperature is limited to +235°C maximum for 10 seconds maximum.

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)