

HIGH VOLTAGE POWER SCHOTTKY RECTIFIER
MBR5H150

General Description

High voltage schottky rectifier suited for switch mode power supplies and other power converters. This device is intended for use in medium voltage operation, and particularly, in high frequency circuits where low switching losses and low noise are required.

The MBR5H150 is available in standard DO-27 and DO-27(A) packages.

Features

- High Surge Capacity
- Low Forward Voltage Drop
- 175°C Operating Junction Temperature
- Guard-Ring for Stress Protection
- Pb-Free and Halogen-Free Packages are available
- The Plastic Material Carries UL Recognition 94V-0

Main Product Characteristics

$I_{F(AV)}$	5A
V_{RRM}	150V
T_J	175°C
$V_{F(max)}$	0.92V

Mechanical Characteristics

- Case: JEDEC DO-201AD Molded Plastic
- Epoxy Meets UL 94 V-0@ 0.125 in
- Weight (Approximately): 1.2 Grams
- Finish: All External Surfaces Corrosion Resistant and Terminal

Applications

- Power Supply – Output Rectification
- Power Management
- Instrumentation

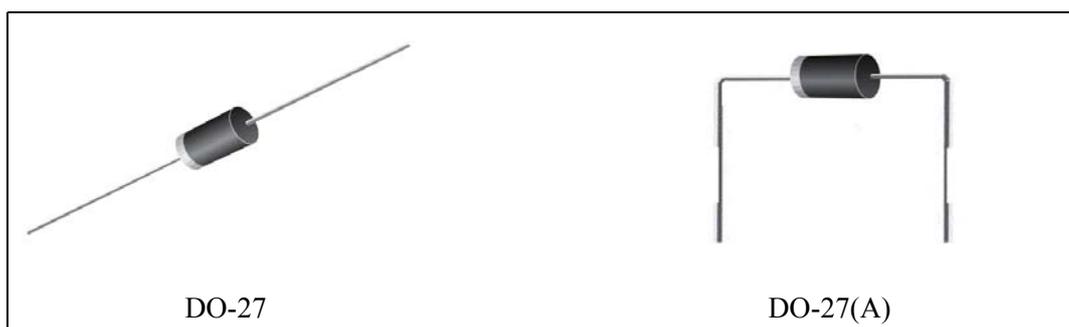


Figure 1. Package Type of MBR5H150

HIGH VOLTAGE POWER SCHOTTKY RECTIFIER

MBR5H150

Pin Configuration


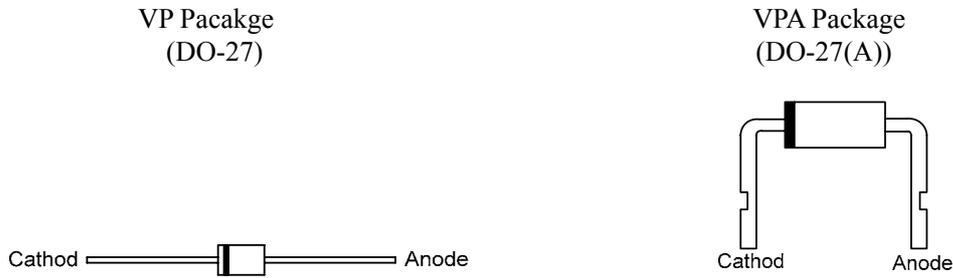


Figure 2. Pin Configuration of MBR5H150 (Top View)

Ordering Information

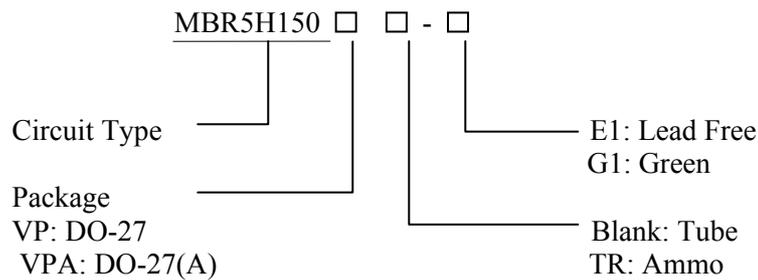

Package	Part Number		Marking ID		Packing Type
	Lead Free	Green	Lead Free	Green	
DO-27	MBR5H150VP-E1	MBR5H150VP-G1	515VP	515VPG	Bulk
	MBR5H150VPTR-E1	MBR5H150VPTR-G1	515VP	515VPG	Ammo
DO-27(A)	MBR5H150VPA-E1	MBR5H150VPA-G1	515VP	515VPG	Bulk

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant. Products with "G1" suffix are available in green packages.

**HIGH VOLTAGE POWER SCHOTTKY RECTIFIER****MBR5H150****Absolute Maximum Ratings (Per Diode Leg) (Note 1)**

Parameter	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	150	V
Average Rectified Forward Current (Rated V_R) $T_C = 150^\circ\text{C}$	$I_{F(AV)}$	5	A
Non repetitive Peak Surge Current (Surge applied at rated load conditions half wave, single phase, 60Hz)	I_{FSM}	125	A
Operating Junction Temperature Range (Note 2)	T_J	175	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to 175	$^\circ\text{C}$
Voltage Rate of Change (Rated V_R)	dv/dt	10000	V/ μs
ESD Ratings: Machine Model = C Human Body Model =3B		> 400 > 8000	V

Note 1: Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “Recommended Operating Conditions” is not implied. Exposure to “Absolute Maximum Ratings” for extended periods may affect device reliability.

Note 2: The heat generated must be less than the thermal conductivity from Junction-to-Ambient: $dP_D/dT_J < 1/\theta_{JA}$.

Recommended Operating Conditions

Parameter	Symbol	Condition	Value	Unit
Maximum Thermal Resistance	θ_{JC}	Junction to Case	TBD	$^\circ\text{C}/\text{W}$
	θ_{JA}	Junction to Ambient	TBD	

Electrical Characteristics

Parameter	Symbol	Conditions	Value	Units
Maximum Instantaneous Forward Voltage Drop (Note 3)	V_F	$I_F=5\text{A}$, $T_C=25^\circ\text{C}$	0.92	V
Maximum Instantaneous Reverse Current (Note 3)	I_R	Rated DC Voltage, $T_C=25^\circ\text{C}$	8.0	μA
		Rated DC Voltage, $T_C=150^\circ\text{C}$	50.0	mA

Note 3: Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$.



Typical Performance Characteristics

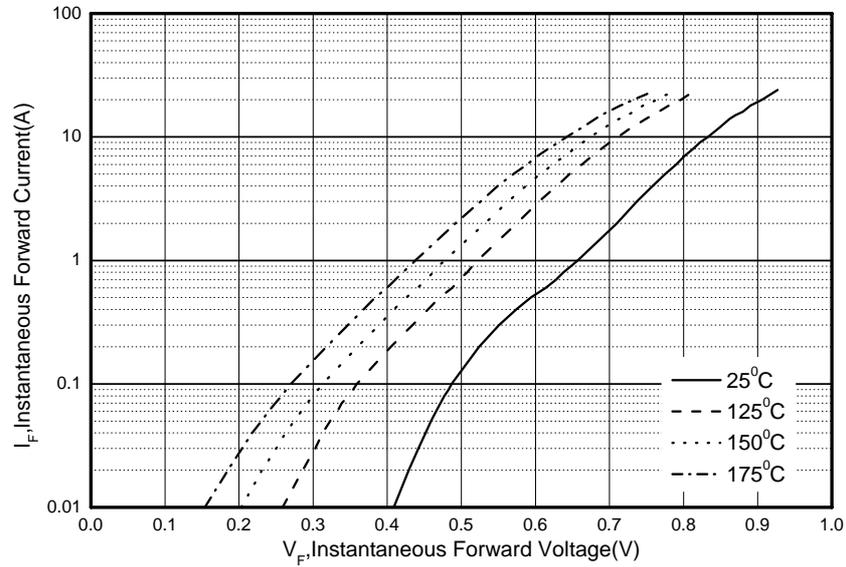


Figure 3. Typical Forward Characteristics

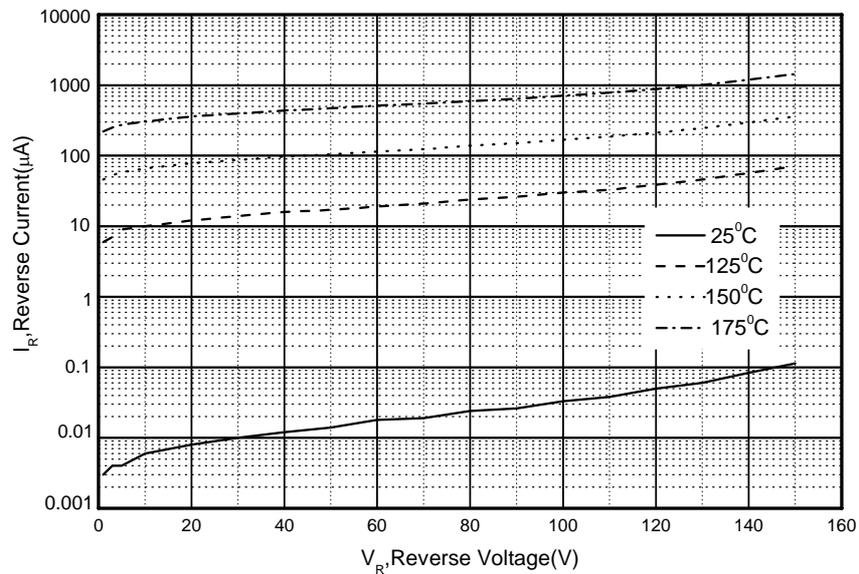


Figure 4. Typical Reverse Characteristics




HIGH VOLTAGE POWER SCHOTTKY RECTIFIER


MBR5H150

Mechanical Dimensions

DO-27

Unit: mm(inch)

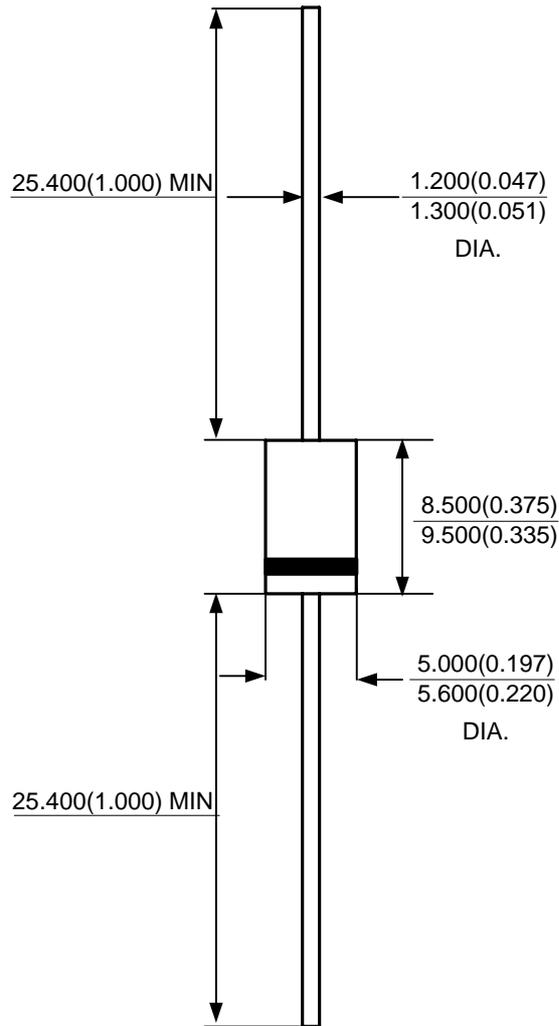

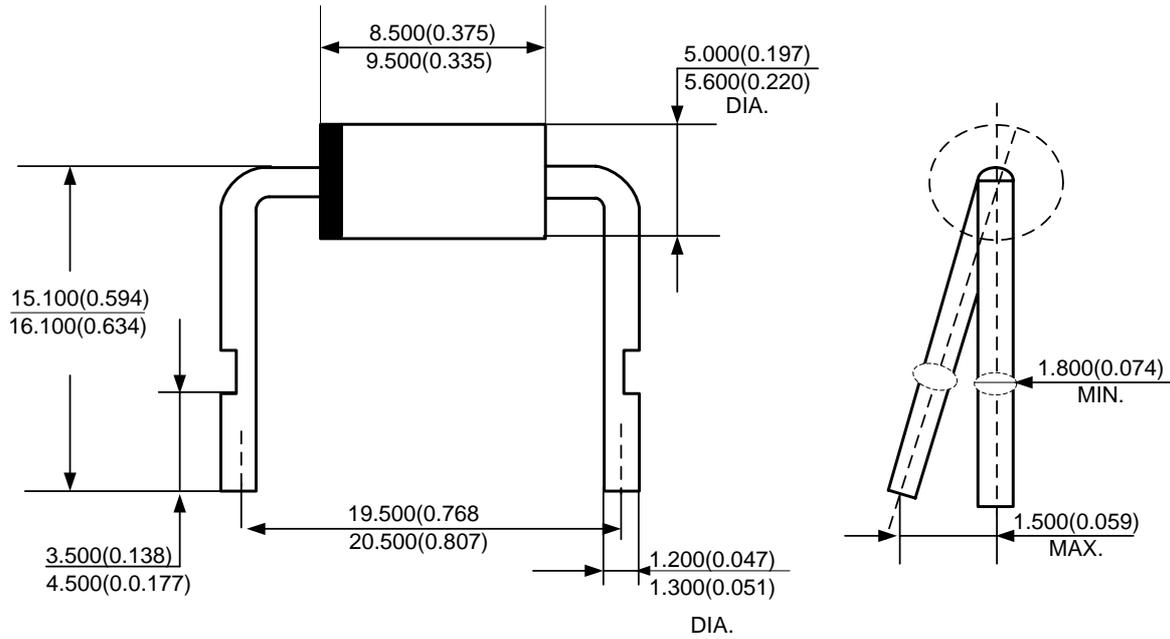HIGH VOLTAGE POWER SCHOTTKY RECTIFIER**MBR5H150****Mechanical Dimensions (Continued)****DO-27(A)****Unit: mm(inch)**



BCD Semiconductor Manufacturing Limited

<http://www.bcdsemi.com>

IMPORTANT NOTICE

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

MAIN SITE

- Headquarters

BCD Semiconductor Manufacturing Limited

No. 1600, Zi Xing Road, Shanghai Zizhu Science-based Industrial Park, 200241, China
Tel: +86-21-24162266, Fax: +86-21-24162277

- Wafer Fab

Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.

800 Yi Shan Road, Shanghai 200233, China
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

REGIONAL SALES OFFICE

Shenzhen Office

Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office
Room E, 5F, Noble Center, No.1006, 3rd Fuzhong Road, Futian District, Shenzhen,
518026, China
Tel: +86-755-8826 7951
Fax: +86-755-8826 7865

Taiwan Office

BCD Semiconductor (Taiwan) Company Limited
4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei,
Taiwan
Tel: +886-2-2656 2808
Fax: +886-2-2656 2806

USA Office

BCD Semiconductor Corp.
30920 Huntwood Ave. Hayward,
CA 94544, USA
Tel : +1-510-324-2988
Fax: +1-510-324-2788

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru