

Specification

Part No.	: ISMP.868.35.6.A.02
Product Name	: Embedded 2dBi 868MHz Ceramic Patch Antenna (35*35*6mm)
Feature	: Provides Compact Directive Pattern For RFID, LoRA, Sigfox and ISM 868MHz Applications 2dBi peak gain on 70x70mm ground plane 35x35x6mm Ceramic Patch Pin Mount Custom Tuning Optional RoHS Compliant



1. Introduction

ISMP.868 is a low-profile pin-mount ceramic patch antenna operating at 868MHz. At just 35x35mm, it provides a high-performing directive antenna solution using minimum board space.

When mounted on a 70x70mm ground plane, ISMP.868 provides efficiency of over 65% and peak gain of 2.17 dBi. It is also right-hand circularly polarized, with an excellent axial ratio of less than 3 dB, providing maximum link reliability between devices where the orientation to each other is changing. These characteristics make it a perfect choice for compact fixed wireless applications operating on the 868 MHz ISM band, including remote instrumentation and RFID applications. It also provides excellent performance on Low-Power Wide-Area Networks (LPWAN) operating at 868 MHz, such as LoRa and Sigfox, allowing users to take advantage of the low-power, long-range communications offered by these networks.

Like all antennas the ISMP.868 will perform differently subject to nearby device environment and ground-plane changes compared to specification. Taoglas offers custom tuning for specific device environments and ground-planes, subject to NRE and MOQ. Contact your regional Taoglas sales office for these services as well as additional support with device integration. 3D STEP file available for ease of mechanical integration.




2. Specification

Electrical	
Frequency	868 MHz
Return Loss	-10dB max.
Efficiency	66.3 %
Average Gain	-1.78 dB
Peak Gain	2.17 dBi typ.
Axial Ratio	3.0 max @ Zenith
Polarization	RHCP
Impedance	50 Ω
Mechanical	
Dimensions	35 x 35 x 6 mm
Material	Ceramic
Pin Diameter	0.9 mm
Pin Length	2.0 mm
Weight	34.3 g
Environmental	
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 105°C
Humidity	Non-condensing 65°C 95% RH


* Antenna properties were measured with the antenna mounted on 70*70mm Ground Plane

3. Antenna Characteristics


3.1 Return Loss

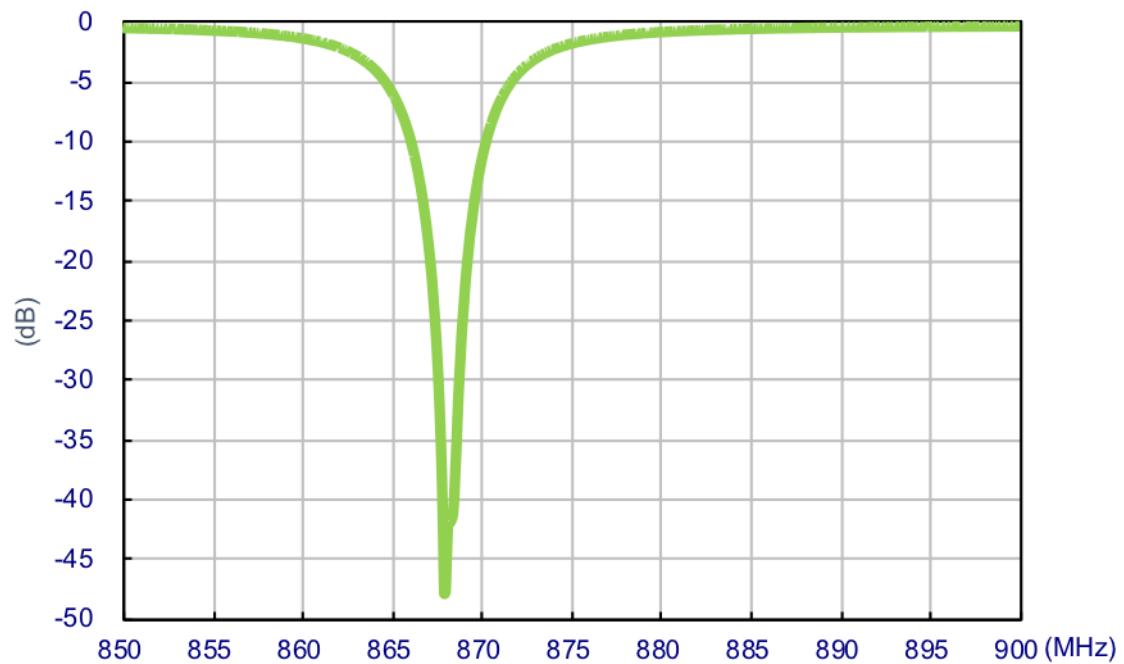


3.2 Efficiency

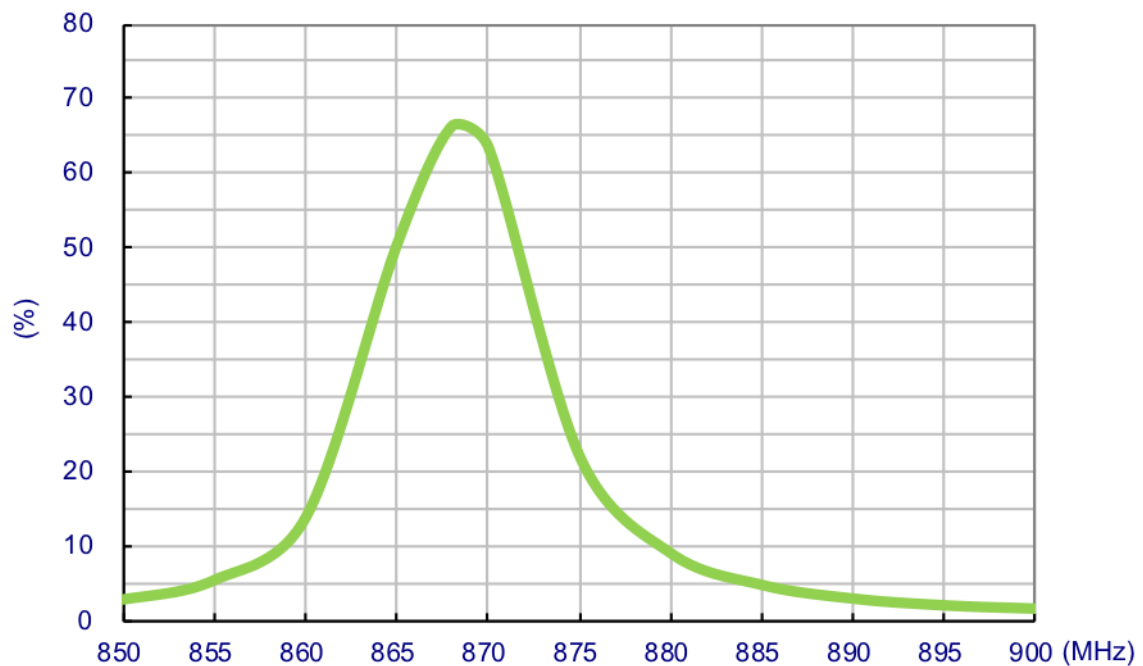


3.3 Peak Gain

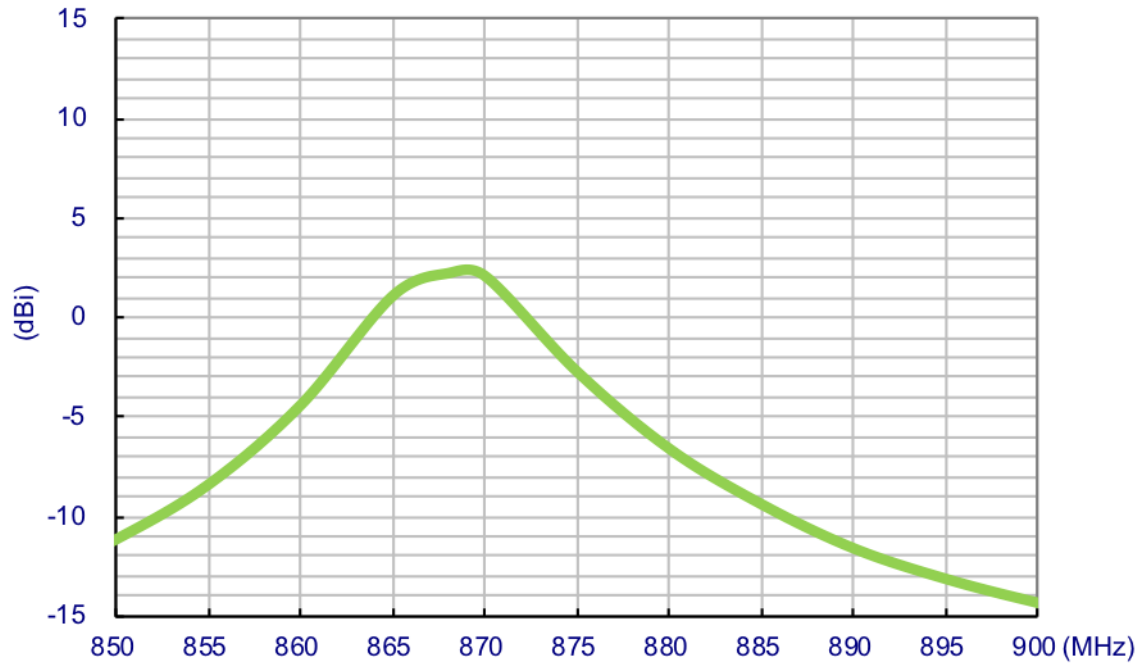

3.4 Average Gain

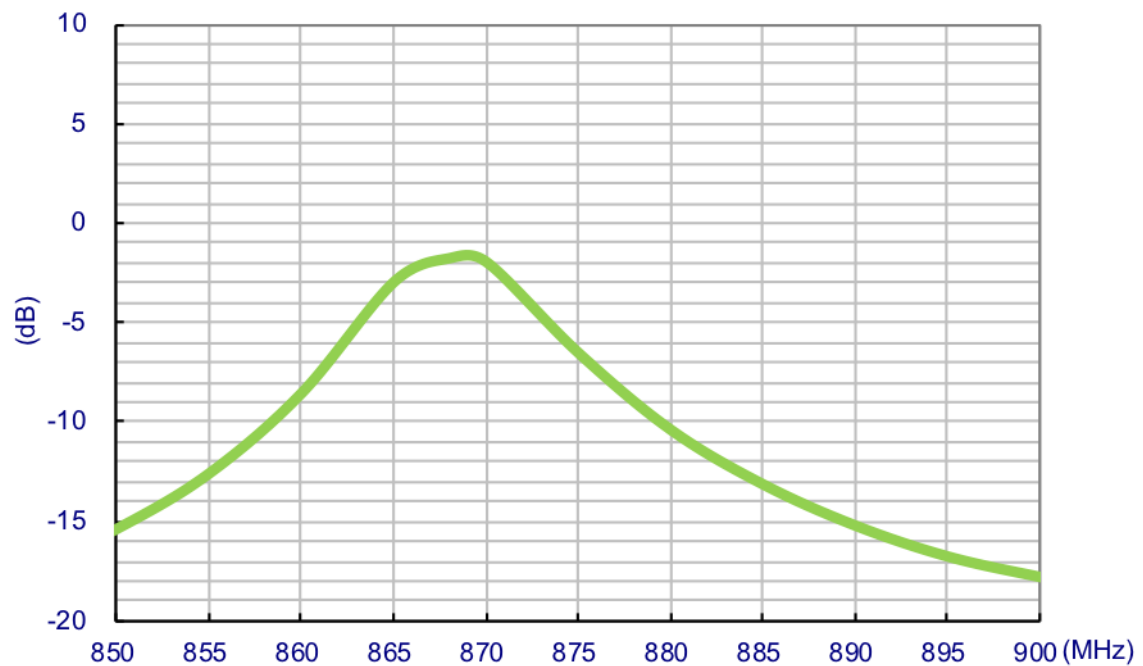


3.5 Axial Ratio (Zenith is at 0 degrees)

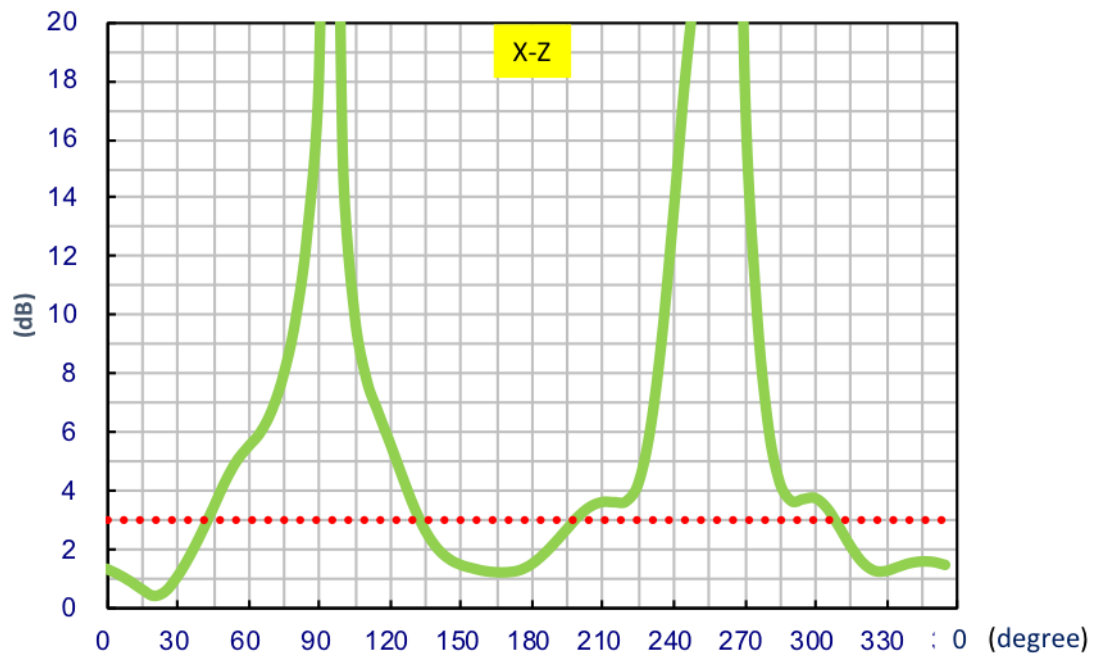


4.2D Radiation Pattern

70x70mm Ground Plane - 868 MHz


4.1 Test Setup

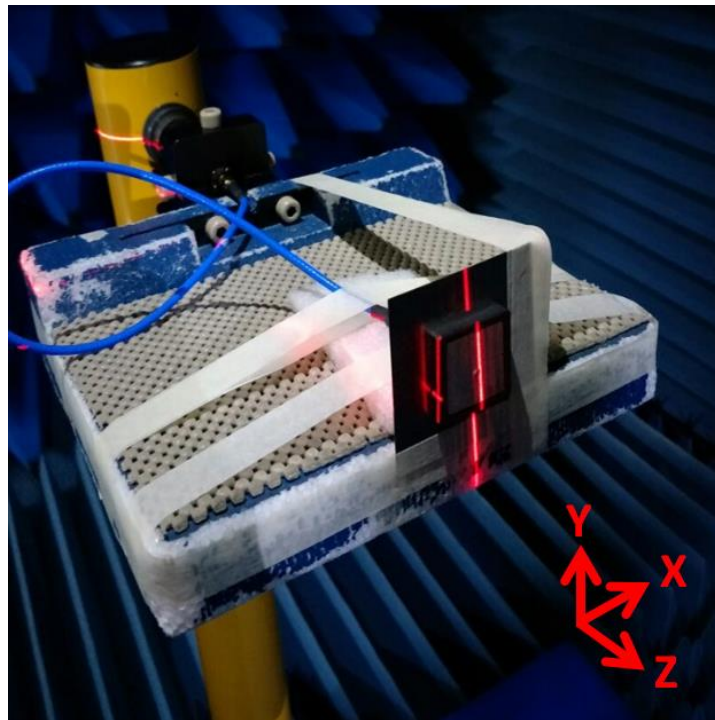


4.2 X-Y Plane

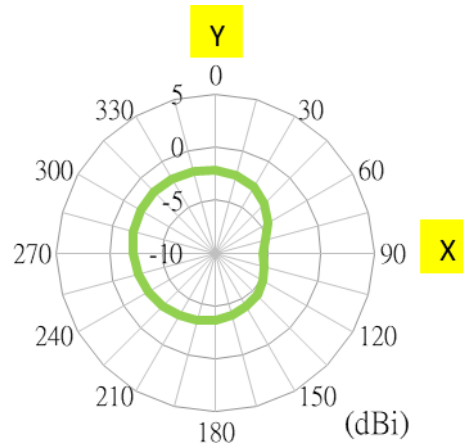


X-Z Plane

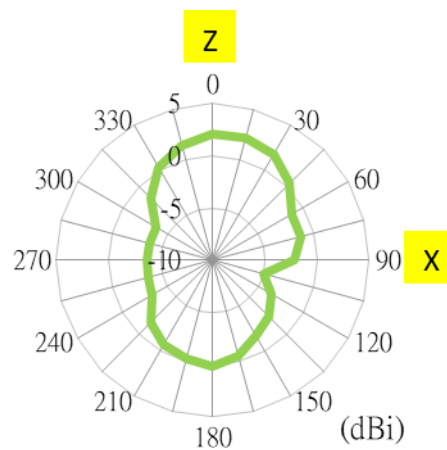


Y-Z Plane

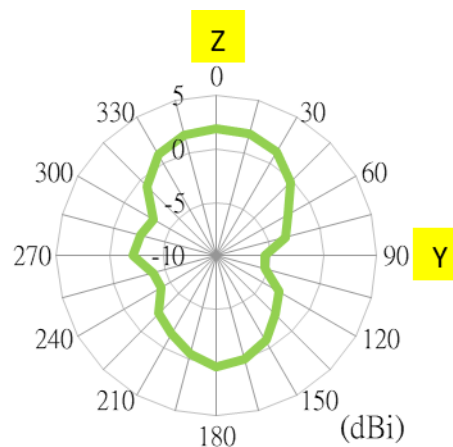

5. 3D Radiation Pattern on 70x70mm Ground Plane - 868 MHz

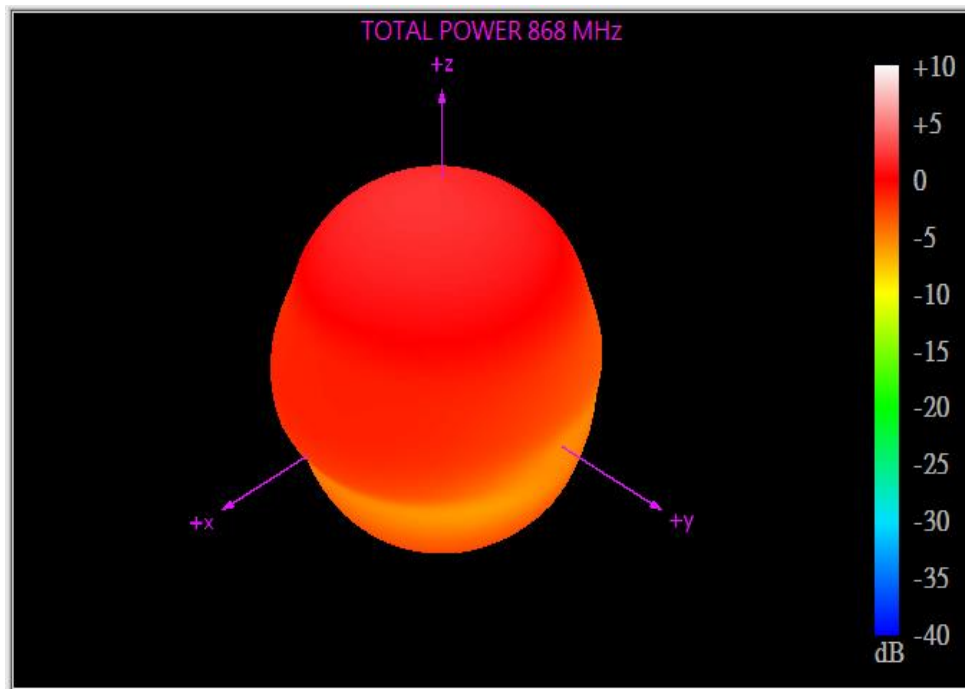


6. Mechanical Drawing

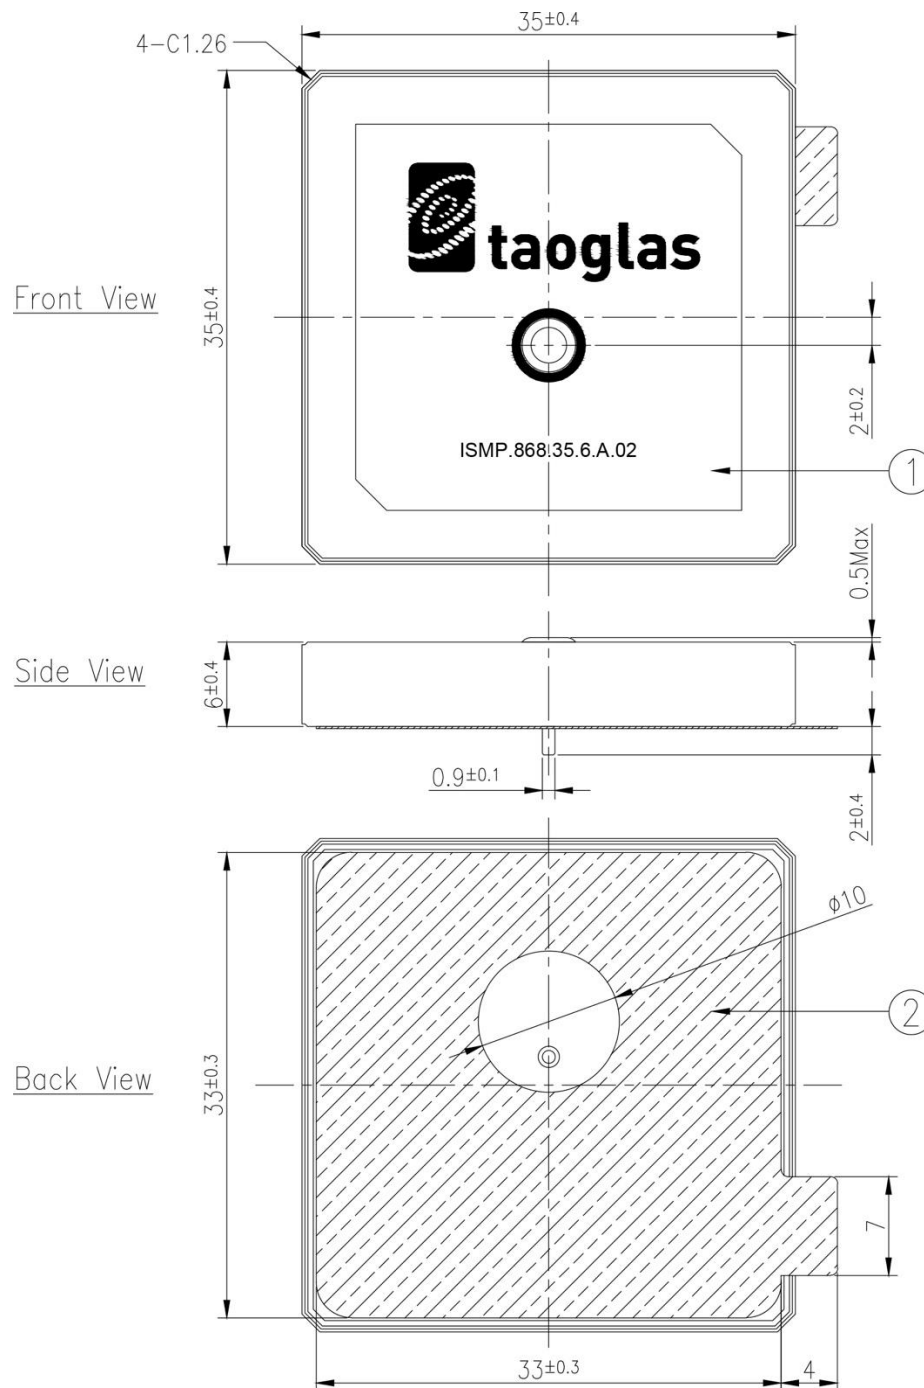


	Name	Material	Finish	QTY
1	Patch (35x35x6mm)	Ceramic	Clear	1
2	Double Sided Adhesive	NITTO 5015	White Liner	1

6.1 Adhesive Thickness

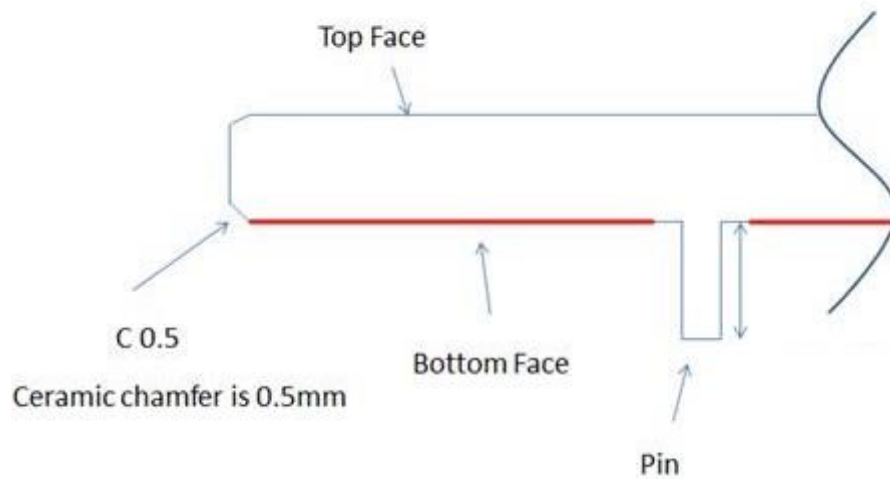


Red Line shows the adhesive without Liner – thickness 0.08~0.1mm

7. PCB Footprint Recommendation

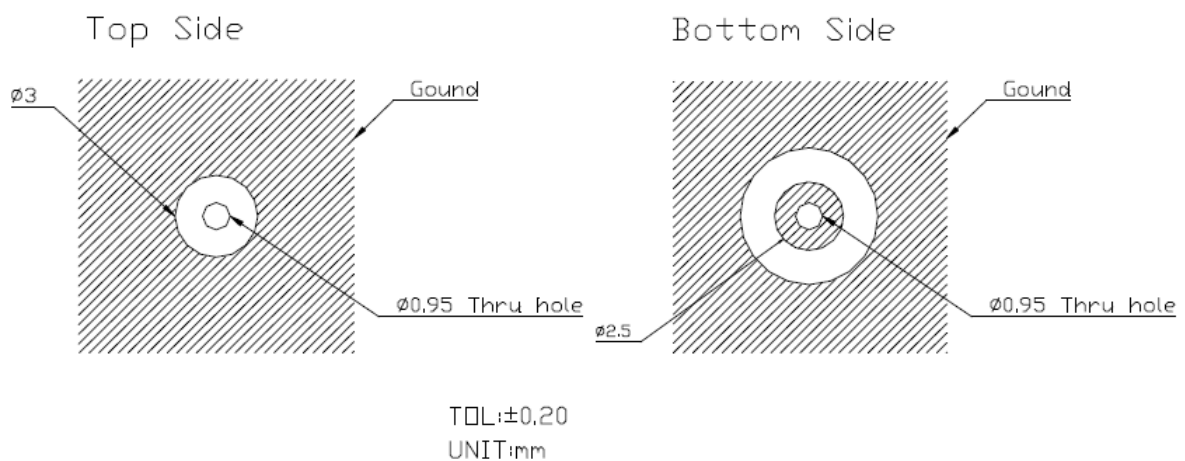


8. Packaging


12 pcs ISMP.868.35.6.A.02 per tray
Tray Dimensions - 257*147*17mm
Weight - 450g

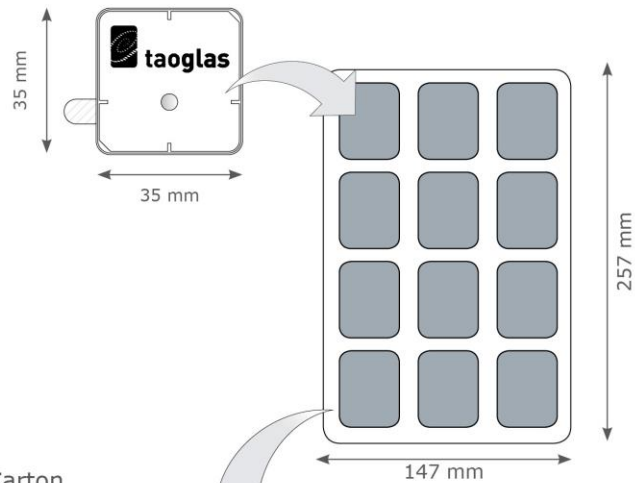


72 pcs ISMP.868.35.6.A.02 per Inner Carton
Carton Dimensions - 260 x 150 x 120mm
Weight - 2.86kg

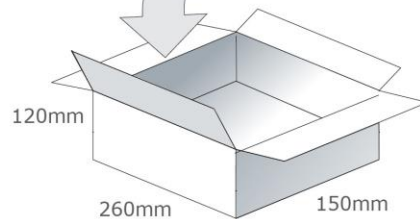

4 Inner Cartons per Large Carton
288 pcs ISMP.35 per Large Carton
Carton Dimensions - 330*290*280mm
Weight - 12kg

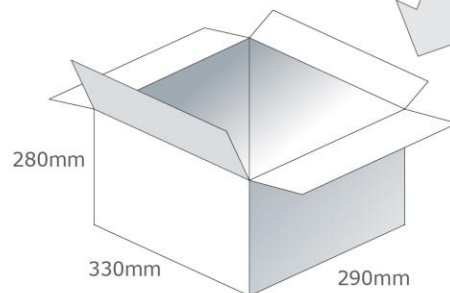

Pallet Dimensions 1200*1000*1320mm
48 Cartons per Pallet
12 Cartons per layer
4 Layers

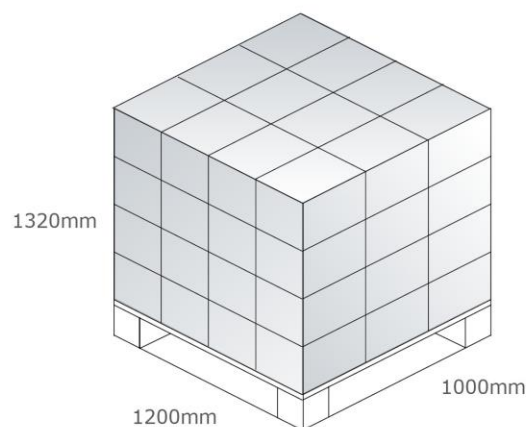

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru