Laird
Smart Technology. Delivered.™

Tgard™ 20
Thermally Conductive Insulators

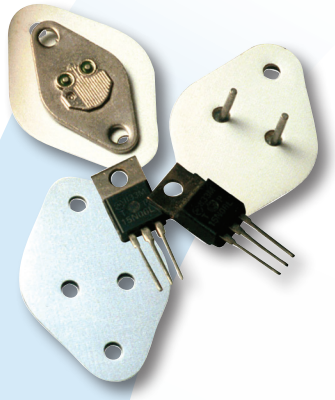

LOW COST, MEDIUM PERFORMANCE INSULATOR MATERIAL

The Tgard™ 20 is designed to solve over heating issues such as lower component efficiency, premature component failures, size limitations and other performance problems for today's computer power supplies.

The Tgard™ 20 is a film-based product designed to resist cut through in screw mounting applications while providing a more consistent breakdown voltage over other insulator constructions.

The phase change coating on the film core provides an excellent mating surface for low pressure clip mounting applications.

PERFORMANCE CAPABILITIES

- High dielectric breakdown of 9,000 volts
- Film base resistance cut through
- Thermal resistance of 0.60°C-in^2/ watt @ 25 psi pressure

FEATURES AND BENEFITS

- Reinforced with moderate temperature resistant film
- High voltage resistant film
- Total thermal resistance of 3.4°C/watt on TO-220
- Non-blocking for ease of use
- Designed for computer power supplies

APPLICATIONS

- Switching mode power supplies for:
  - Computers
  - Consumer electronics
- UPS units

global solutions: local support™

Americas: +1.800.843.4556
Europe: +49.8031.2460.0
Asia: +86.755.2714.1166

CLV-customerservice@lairdtech.com
www.lairdtech.com/thermal

Laird
Smart Technology. Delivered.™

Tgard™ 20
Thermally Conductive Insulators

PROPERTY	TEST METHOD	METRIC VALUES	IMPERIAL VALUES
ELECTRICAL PROPERTIES			
Dielectric Withstand Voltage	ASTM D149	4,500 volts DC	4,500 volts DC
Dielectric Breakdown Voltage	ASTM D149	>9,000 volts AC	>9,000 volts AC
Volume Resistivity	ASTM D257	$>10^{12}$ ohm-cm	$>10^{12}$ ohm-in
Dielectric Constant @ 1 MHz	ASTM D257	1,8	1.8
MECHANICAL PROPERTIES			
Thickness		0,076 mm	0.003 inch
Substrate Film Thickness		0,051 mm	0.002 inch
Tensile Strength	ASTM D412	138 MPa	20 kpsi
Elongation	ASTM D412	130%	130%
Operating Temperature Range		-40 - 150°C	-40 - 302°F
Color		White	White
UL Flammability Rating	UL 94	V0	V0

PRESSURE, PSI (KPA)	UNITS	10 (69)	25 (172)	50 (345)	100 (689)	200 (1379)
TOTAL THERMAL RESISTANCE						
Modified ASTM D5470	°C-in^2/watt	0.65	0.60	0.60	0.60	0.60
Modified ASTM D5470	°C-cm^2/watt	4,2	3,9	3,9	3,9	3,9
TO-220	°C/watt	3.8	3.4	3.4	3.4	3.4

STANDARD THICKNESS:
3 mils (0,076 mm)

STANDARD ROLL SIZE:
12" x 300'
(304 mm x 91 meters)

DIE-CUT PARTS:
Standard and custom configurations available

Data for design engineer guidance only. Observed performance varies in application. Engineers are reminded to test the material in application.

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2010 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights. A15561-00 REV B, 7/02/09

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru