

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0878630015](#)
Status: **Active**
Description: 1.27mm (.050") Signal Pitch, 0.80mm (.031") SCSI Pitch, 1.27mm (.050") Power Pitch
SAS Receptacle, Vertical, Press fit, 2.70mm (.106") Tail Length, 29 Circuits, Lead free

Documents:
[3D Model](#) [Product Specification PS-87863-060 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
UL E29179

General

Product Family I/O Connectors
Series [87863](#)
Application Board-to-Board
Comments No pick and place cap
Component Type Receptacle
Product Name SAS
Type N/A

Physical

Boot Color N/A
Circuits (Loaded) 29
Circuits (maximum) 29
Circuits Detail Signal 7, SCSI 7, Power 15
Color - Resin Black
Durability (mating cycles max) 500
Flammability 94V-0
Gender Female
Keying to Mating Part Yes
Lock to Mating Part None
Material - Metal Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Number of Rows 2
Orientation Vertical
PC Tail Length (in) 0.087 In, 0.106 In
PC Tail Length (mm) 2.20 mm, 2.70 mm
PCB Locator Yes
PCB Retention Yes
PCB Thickness Recommended (in) 0.093 In, 0.125 In
PCB Thickness Recommended (mm) 2.36 mm, 3.18 mm
Packaging Type Tray
Panel Mount Yes
Pitch - Mating Interface (in) 0.031 In, 0.050 In
Pitch - Mating Interface (mm) 0.80 mm, 1.27 mm
Pitch - Term. Interface (in) 0.031 In, 0.050 In
Pitch - Term. Interface (mm) 0.80 mm, 1.27 mm
Plating min: Mating (µin) 30
Plating min: Mating (µm) 0.76
Plating min: Termination (µin) 102
Plating min: Termination (µm) 2.54
Polarized to Mating Part Yes

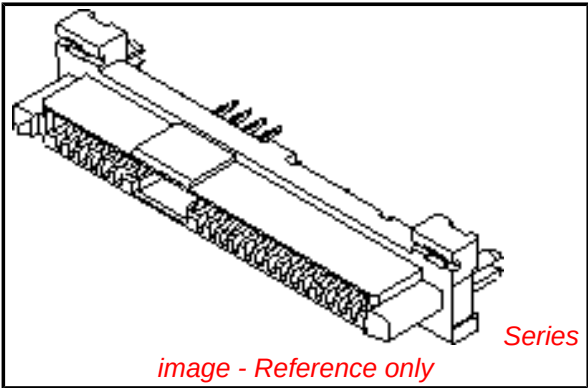

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free
Status
Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.


Search Parts in this Series
[87863Series](#)

Mates With
[87679](#) , [87799](#) , [87703](#) , SFF 8482 Hard
Disk Drive and Backplane Plug

Polarized to PCB	Yes
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	0°C to +55°C
Termination Interface: Style	Through Hole - Compliant Pin
Waterproof / Dustproof	No
Wire Size AWG	N/A
Electrical	
Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	30V
Material Info	
Reference - Drawing Numbers	
Product Specification	PS-87863-060
Sales Drawing	SD-87863-059


This document was generated on 04/02/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



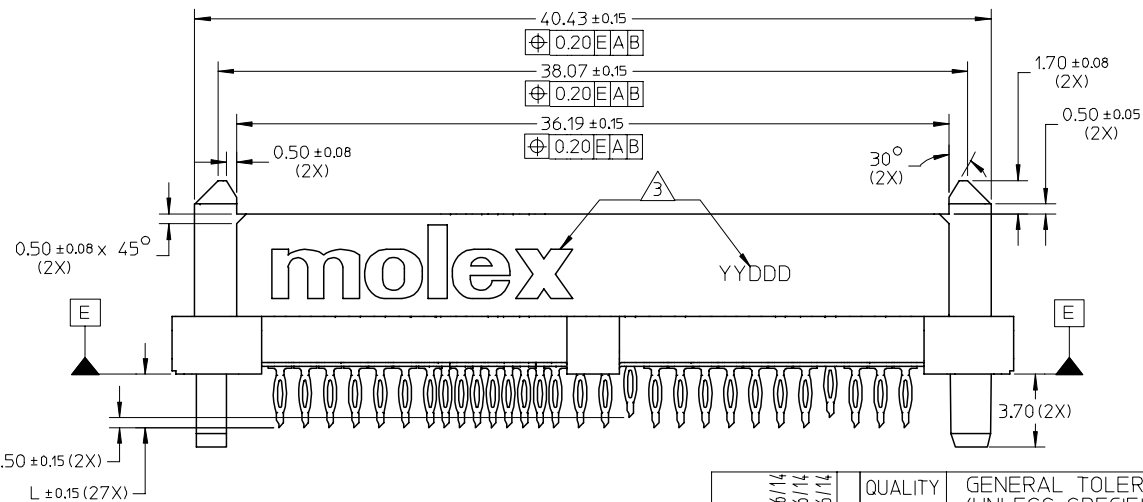


NOTES:


1. MATERIAL:
HOUSING: LIQUID CRYSTAL POLYMER, GLASS FILLED, UL 94V-0, COLOR BLACK.
TERMINAL: COPPER ALLOY.
2. PLATING:
CONTACTS: 0.76 μ m MIN. SELECTIVE GOLD OVER 1.27m MIN. NICKEL UNDERPLATE.
SOLDERTAILS: 2.54 μ m MIN. TIN OR 2.54 μ m MIN. TIN/LEAD
OVER 1.27m MIN. NICKEL UNDERPLATE.
3. MOLEX LOGO AND DATE CODE LOCATED APPROXIMATELY AS SHOWN.
4. PRODUCT CONFORMS TO SFF-8482 SPECIFICATION.
5. KEEP OUT ZONE ON BOTH SIDE OF THE PCB FOR CONNECTOR.
6. PACKAGING: TRAY.
7. PRODUCT SPECIFICATION:
87863-0015 AND 87863-0025 REFER TO PS-87863-060
87863-2025 REFER TO PS-87863-061
8. MATES WITH: SFF-8482 PLUG
SATA PLUG SERIES 87679, 87703 AND 87799
9. THIS PRODUCT IS COMPLIANT TO RoHS DIRECTIVE WITH THE FOLLOWING
BANNED SUBSTANCES - LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM,
POLYBROMINATED BIPHENYLS AND POLYBROMINATED DIPHENYLS ETHERS.





tb_frame_A3_P_AM_T
Rev. E 2006/04/15

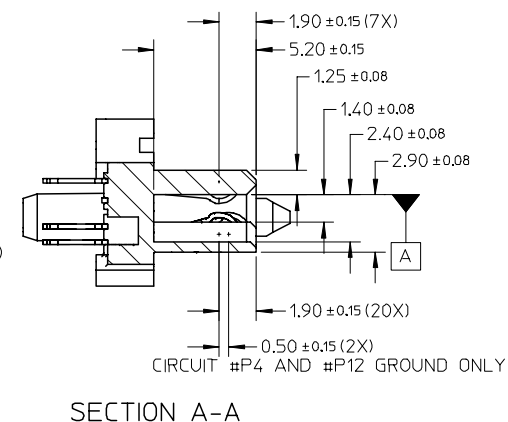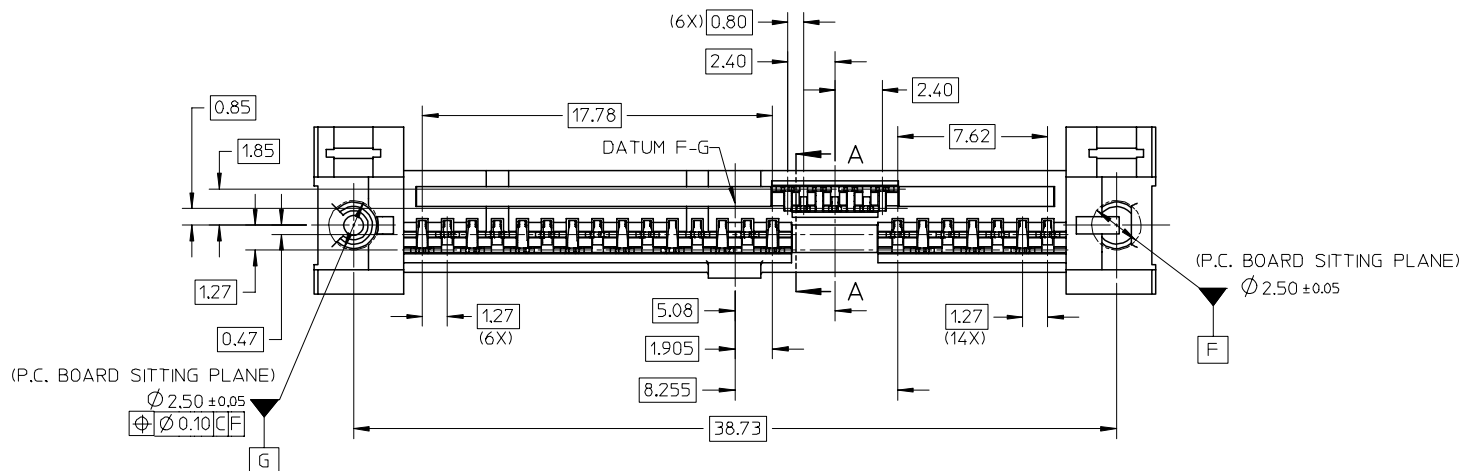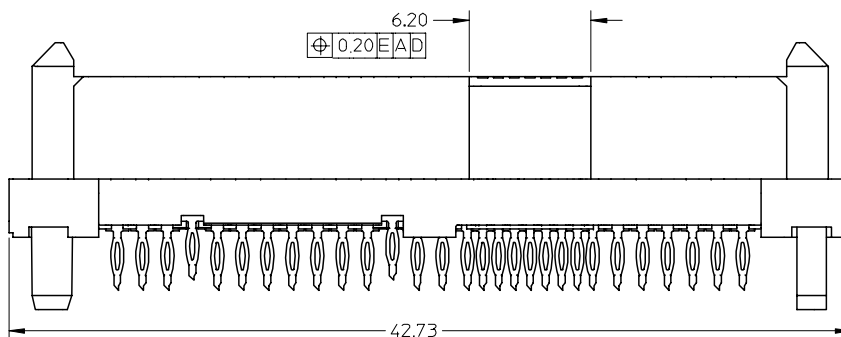

REVISED EC NO: S2007-1057 DRAWN: YKH CHKD: CGTAN APPR: KCLING C5	2007/06/14	2007/06/14	DESCRIPTION REVISION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
					4 PLACES ± --- ± ---	DRAWN BY DKOH	DATE 2004/10/16	TITLE SERIAL ATTACH SCSI PRESS-FIT RECEPTACLE STANDARD HEIGHT				
					3 PLACES ± --- ± ---	CHECKED BY	DATE					
					2 PLACES ± 0.20 ± ---	KCLING	2004/11/15					
					1 PLACE ± --- ± ---	APPROVED BY	DATE					
					ANGULAR ± 3 °	SKTOH	2004/11/17	MOLEX MOLEX INCORPORATED				
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
						SEE TABLE		SD-87863-059		2 OF 4		
						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

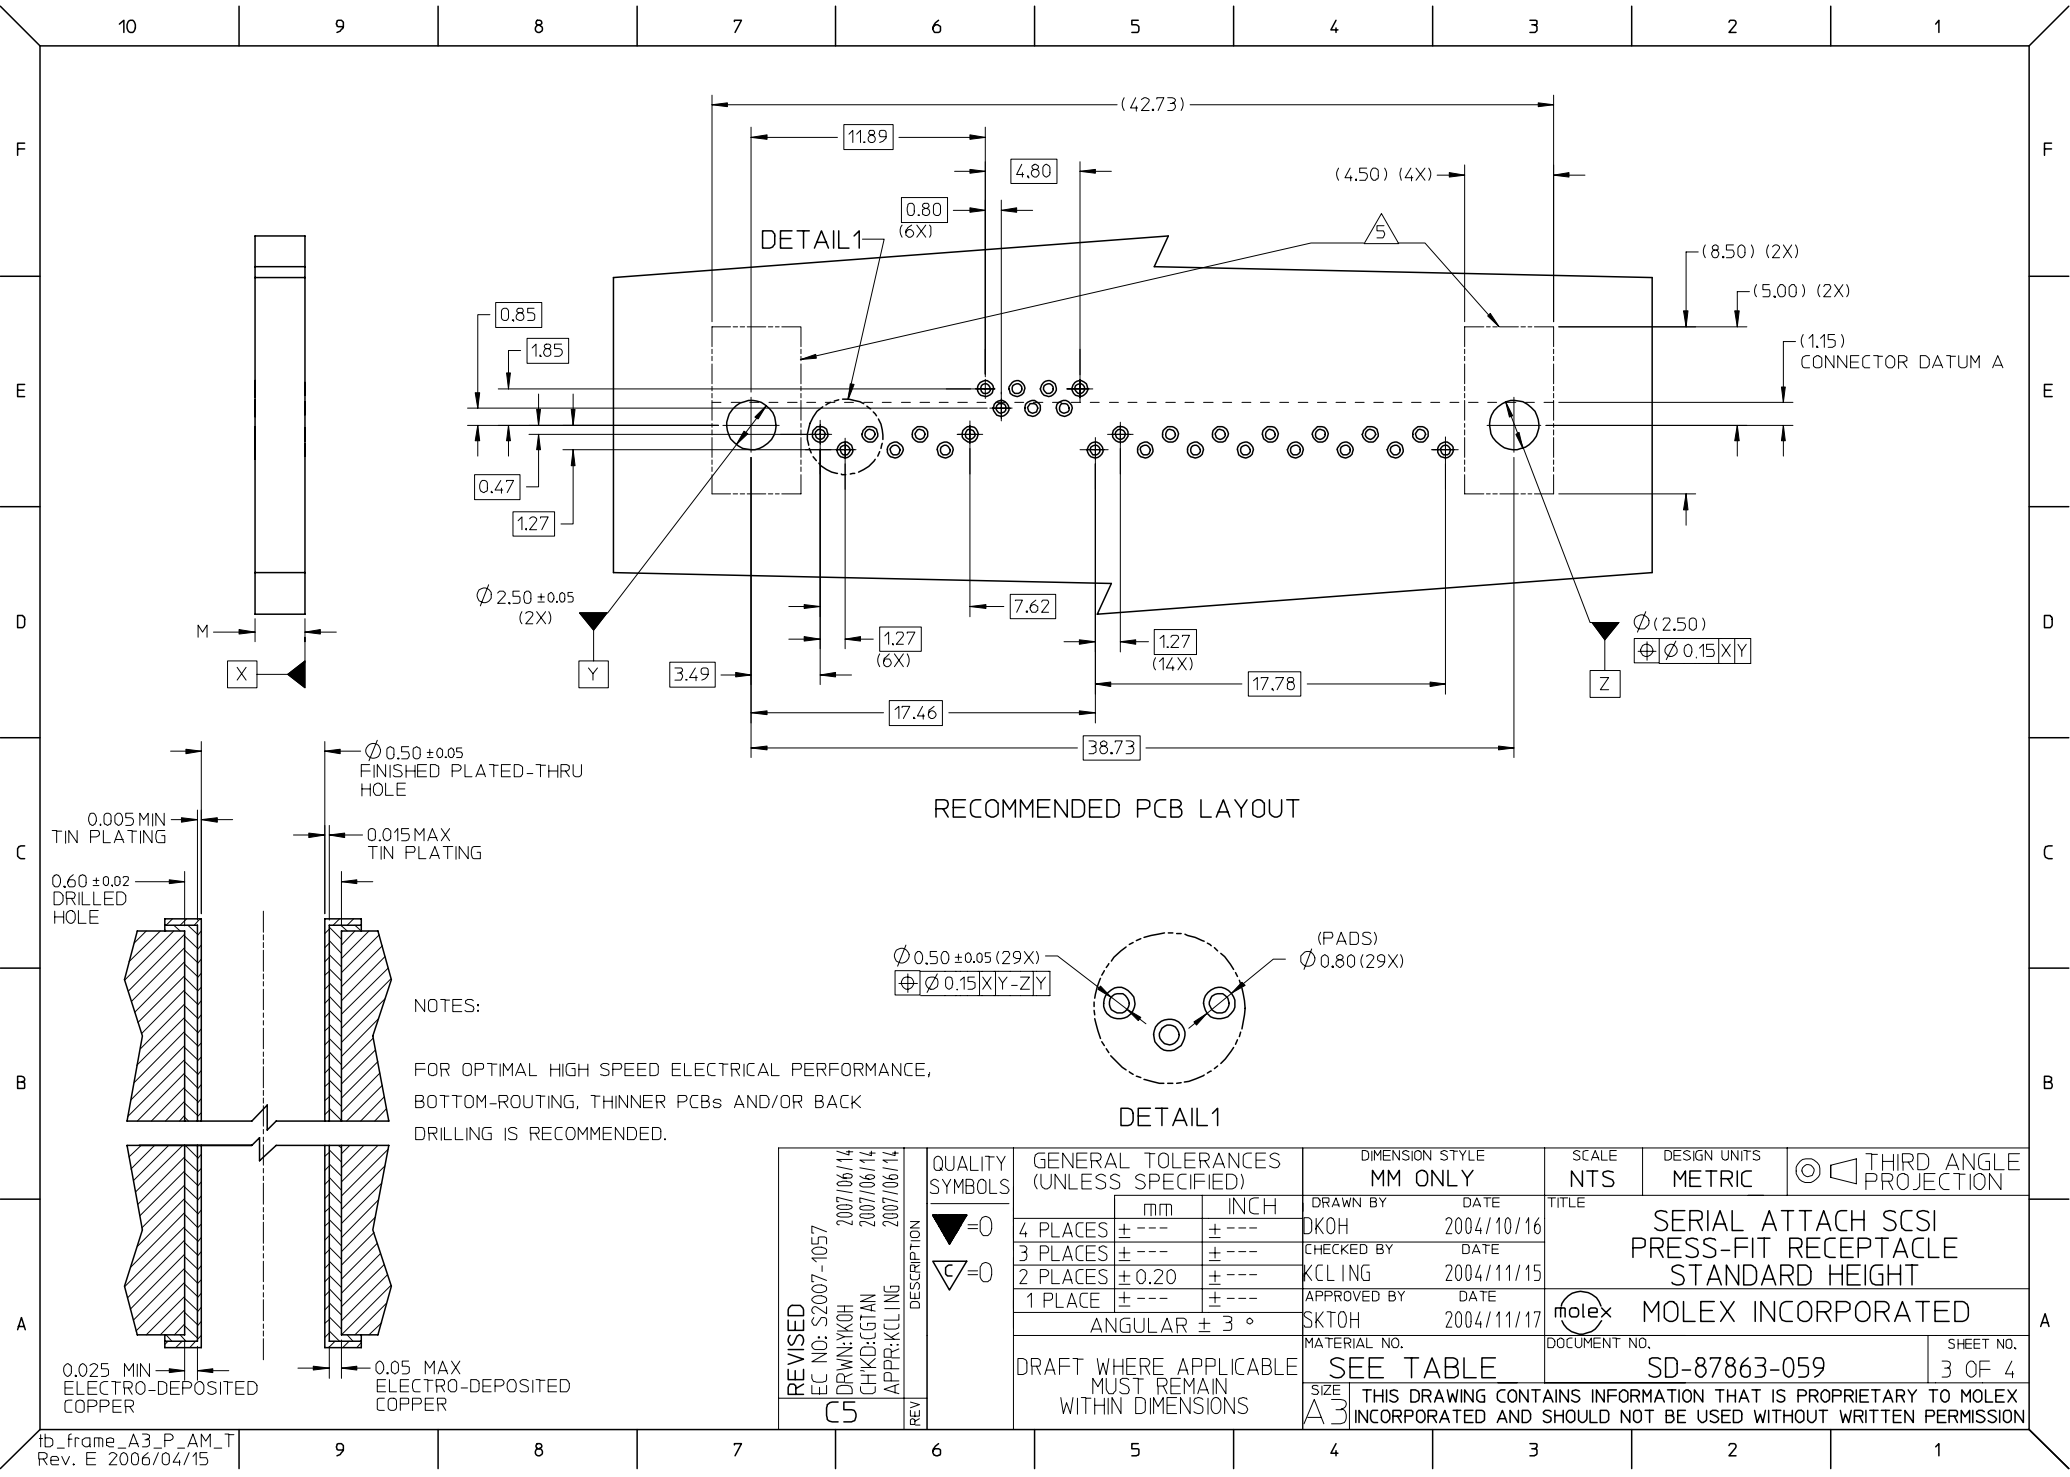

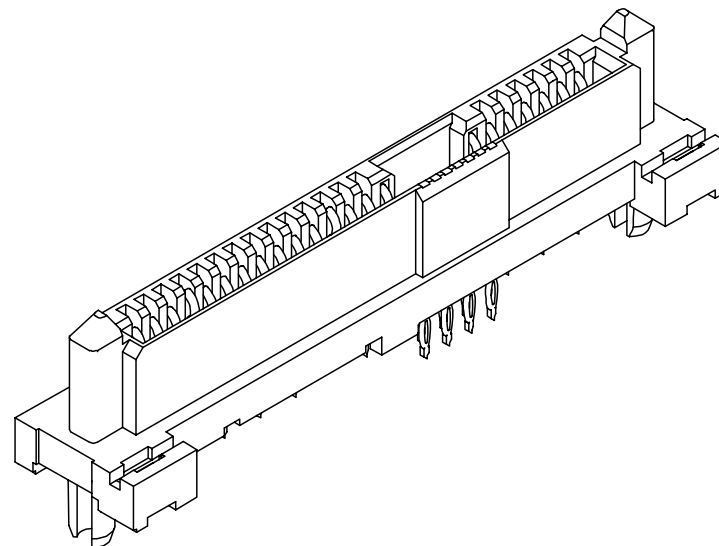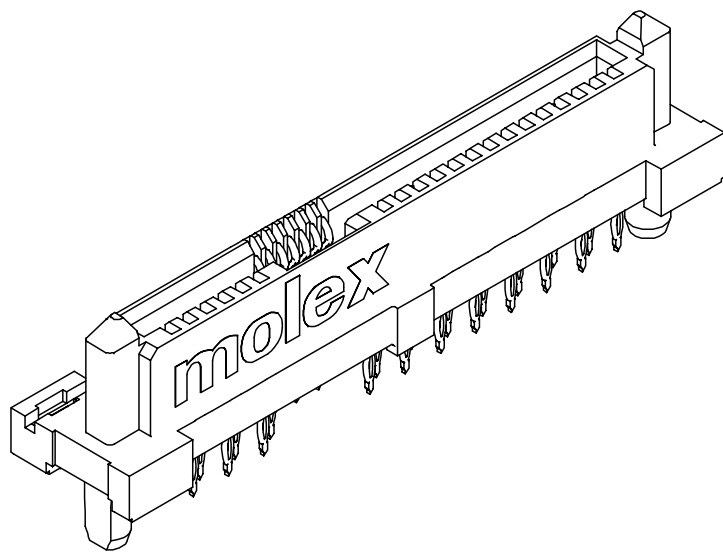

REVISED EC NO: S2007-1057 DRWN:YKH CHKD:CGTAN APPR:KCLING C5	2007/06/14 2007/06/14 2007/06/14	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
					mm	INCH	DRAWN BY DKOH	DATE 2004/10/16	TITLE SERIAL ATTACH SCSI PRESS-FIT RECEPTACLE STANDARD HEIGHT			
				4 PLACES	± ---	± ---	CHECKED BY	DATE				
				3 PLACES	± ---	± ---	KCL ING	2004/11/15				
				2 PLACES	± 0.20	± ---	APPROVED BY	DATE	MOLEX INCORPORATED			
				1 PLACE	± ---	± ---	SKTOH	2004/11/17				
				ANGULAR ± 3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-87863-059		4 OF 4						
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru