

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0850132036

Status:

Active

Overview:

din\_41612

Description:

2.54mm (.100") Pitch DIN 41612 Header, Through Hole, Vertical, Style R/2 Reverse, 1µm (40µ") Selective Gold (Au), 48 Circuits, Lead free

Documents:

3D Model

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

| Agency Certification |                                    |
|----------------------|------------------------------------|
| CSA                  | LR19980                            |
| UL                   | E29179                             |
| General              |                                    |
| Product Family       | Backplane Connectors               |
| Series               | 85013                              |
| Application          | Daughtercard                       |
| Comments             | 4 Day Industrial Environment (S02) |
| Component Type       | PCB Header                         |
| Overview             | din_41612                          |
| Product Name         | IEC 603-2/DIN 41612                |
| Style                | R/2                                |

| Physical                       |                 |
|--------------------------------|-----------------|
| Circuits (Loaded)              | 48              |
| Circuits (maximum)             | 48              |
| Circuits Detail                | Rows A, B, & C  |
| Durability (mating cycles max) | 500             |
| First Mate / Last Break        | No              |
| Flammability                   | 94V-0           |
| Guide to Mating Part           | No              |
| Keying to Mating Part          | Yes             |
| Number of Columns              | 16              |
| Number of Pairs                | Open Pin Field  |
| Number of Rows                 | 3               |
| Orientation                    | Vertical        |
| PC Tail Length (in)            | 0.524 In        |
| PC Tail Length (mm)            | 13.30 mm        |
| PCB Locator                    | No              |
| PCB Retention                  | Yes             |
| Packaging Type                 | Bag             |
| Pitch - Mating Interface (in)  | 0.100 In        |
| Pitch - Mating Interface (mm)  | 2.54 mm         |
| Pitch - Term. Interface (in)   | 0.100 In        |
| Pitch - Term. Interface (mm)   | 2.54 mm         |
| Plating min: Mating (µin)      | 39              |
| Plating min: Mating (µm)       | 1               |
| Polarized to PCB               | No              |
| Stackable                      | No              |
| Surface Mount Compatible (SMC) | No              |
| Temperature Range - Operating  | -55°C to +125°C |

| Electrical                    |            |
|-------------------------------|------------|
| Current - Maximum per Contact | 1A         |
| Data Rate                     | 622.0 Mbps |

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

85013Series

Mates With

85042 , 85052 Backplane Header

|                         |             |
|-------------------------|-------------|
| Real Signals (per 25mm) | 30          |
| Shield Type             | N/A         |
| Shielded                | No          |
| Voltage - Maximum       | 1000V (RMS) |

**Solder Process Data**

|                                                |                        |
|------------------------------------------------|------------------------|
| Duration at Max. Process Temperature (seconds) | 10                     |
| Lead-free Process Capability                   | Wave Capable (TH only) |
| Process Temperature max. C                     | 260                    |

**Material Info**



**Reference - Drawing Numbers**

|               |                                                                              |
|---------------|------------------------------------------------------------------------------|
| Sales Drawing | E-85013-0002, E-85013-2036, SD-85013-2036,<br>SDA-85013-0002, SDA-85013-2036 |
|---------------|------------------------------------------------------------------------------|




This document was generated on 05/17/2010

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

1. MATERIAL NUMBER, BATCH CODE, UL CSA MARKING TO BE PRINTED ON THE CONNECTOR AS PER E-36502-005
2. PRODUCT SPECIFICATION PS:85013-001
3. PACKING SPECIFICATION PK: 36512-001
4. CUT FACES OF TIP WITHOUT PLATING IS PERMITTED
5. REFERENCE AREA OF PLATING
6. GAUGE DRAWING REFER E-36500-100

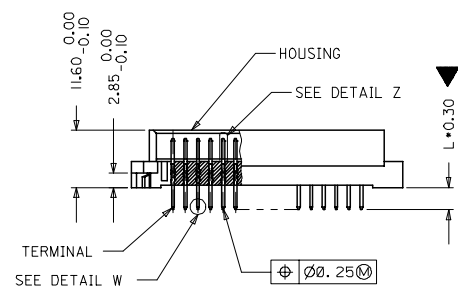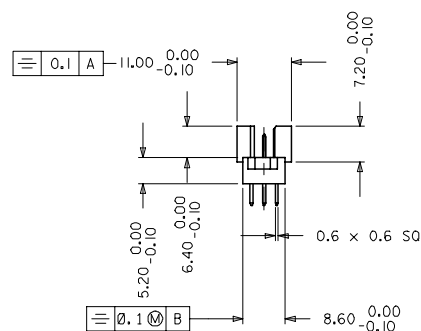



SCRIPT E1.5-6 DIN 30640, ELEVATED 0.2

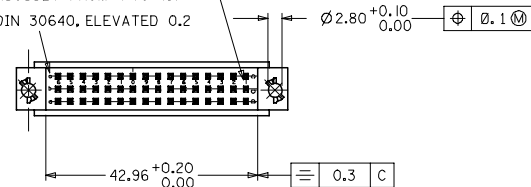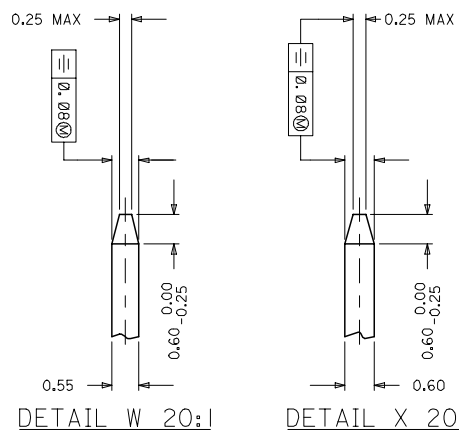

|                    |            |                 |                  |                                                            |            |                            |                                                                                                                                  |              |                        |                           |
|--------------------|------------|-----------------|------------------|------------------------------------------------------------|------------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------|--------------|------------------------|---------------------------|
| EC. NO.: 2005-0092 |            | DESCRIPTION     | QUALITY SYMBOLS  | GENERAL TOLERANCES (UNLESS SPECIFIED)                      |            | DIMENSION STYLE<br>MM ONLY |                                                                                                                                  | SCALE<br>2:1 | DESIGN UNITS<br>METRIC | THIRD ANGLE<br>PROJECTION |
| 2004/11/23         | 2004/11/23 |                 | ▽=1<br>▽=0       | mm                                                         | INCH       | DRAWN BY                   | DATE                                                                                                                             | TITLE        |                        |                           |
| DRINKSHIYASHA      | CHICKASAW  |                 | 4 PLACES ± .001  | ± .001                                                     | NS         | 2004/03/31                 | 48 POS. MALE CONNECTOR<br>ACC. DIN 41612                                                                                         |              |                        |                           |
|                    |            |                 | 3 PLACES ± .0005 | ± .0005                                                    | CHECKED BY | DATE                       | STYLE R/2 CONTACTS                                                                                                               |              |                        |                           |
|                    |            | 2 PLACES ± .005 | ± .005           | GJLOWE                                                     | 2004/03/31 | MOLEX INCORPORATED         |                                                                                                                                  |              |                        |                           |
|                    |            | 1 PLACE ± 0.1   | ± 0.1            | APPROVED BY                                                | DATE       |                            |                                                                                                                                  |              |                        |                           |
|                    |            |                 |                  | GJLOWE                                                     | 2004/03/31 |                            |                                                                                                                                  |              |                        |                           |
|                    |            |                 |                  | ANGULAR ± 2°                                               |            |                            |                                                                                                                                  |              |                        |                           |
|                    |            |                 |                  | DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS |            | MATERIAL NO.               |                                                                                                                                  | DOCUMENT NO. |                        | SHEET NO.                 |
|                    |            |                 |                  |                                                            |            | SEE CHART                  |                                                                                                                                  | E-85013-0002 |                        | 1 OF 2                    |
|                    |            |                 |                  |                                                            |            | SIZE<br>A1                 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX<br>INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |              |                        |                           |

|                     |     |     |     |
|---------------------|-----|-----|-----|
| PRE MATING CONTACTS | 5.4 | 4.1 | 4.8 |
| NORMAL CONTACTS     | 4.8 | 3.5 | 4.2 |
|                     | M   | A   | B   |

# MALE CONNECTOR WITH MOUNTING CLIPS

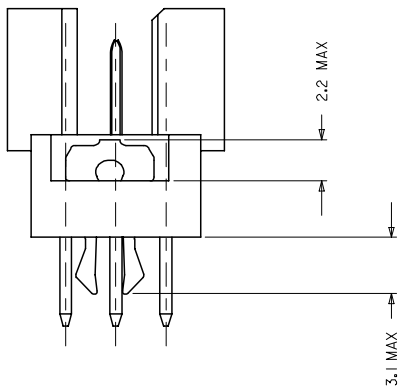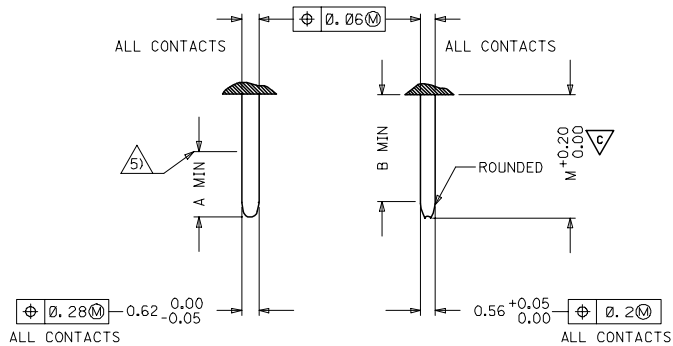


DETAIL Z

DETAIL Y

CLIPS SNAP UNDER  
PC - BOARD OF  
1.5 to 1.8 mm  
Fm < 60N  
Fr >= 20N  
Fr >= 200N, WHEN  
SOLDERED IN  
PLATED - THROUGH  
FIXING HOLES

Fm = MOUNTING FORCE  
(FOR ONE CONNECTOR = 2 CLIPS)




FR = RETENTION FORCE  
(FOR ONE CONNECTOR = 2 CLIPS)



CLIPS STICK IN  
FIXING HOLE OF  
PC - BOARDS  
OVER 1.8 mm  
Fm < 60N  
FR >= 16N

|                                                                              |                                        |             |                                   |                                       |       |                                                                                                                               |             |              |                        |                        |  |  |  |
|------------------------------------------------------------------------------|----------------------------------------|-------------|-----------------------------------|---------------------------------------|-------|-------------------------------------------------------------------------------------------------------------------------------|-------------|--------------|------------------------|------------------------|--|--|--|
| EC NO: 12005-0092<br>DRAWN:SHI WASHA<br>CHKD:CHANDRAN<br>APPR:SSUDHAR<br>REV | 2004/11/23<br>2004/11/23<br>2004/11/23 | DESCRIPTION | QUALITY SYMBOLS<br><br>▽=0<br>▽=1 | GENERAL TOLERANCES (UNLESS SPECIFIED) |       | DIMENSION STYLE<br>MM ONLY                                                                                                    |             | SCALE<br>2:1 | DESIGN UNITS<br>METRIC | THIRD ANGLE PROJECTION |  |  |  |
|                                                                              | mm                                     |             |                                   | INCH                                  |       | DRAWN BY                                                                                                                      |             | DATE         | TITLE                  |                        |  |  |  |
|                                                                              | 4 PLACES                               |             |                                   | ±.005                                 | ±.005 | ±.005                                                                                                                         | NS          | 2004/03/31   |                        | 48 POS. MALE CONNECTOR |  |  |  |
|                                                                              | 3 PLACES                               |             |                                   | ±0.005                                | ±.005 | ±.005                                                                                                                         | CHECKED BY  | DATE         |                        | ACC. DIN 41612         |  |  |  |
|                                                                              | 2 PLACES                               |             |                                   | ±0.05                                 | ±.005 | ±.005                                                                                                                         | GJLOWE      | 2004/03/31   |                        | STYLE R/2 CONTACTS     |  |  |  |
|                                                                              | 1 PLACE                                |             |                                   | ±0.1                                  | ±.005 | ±.005                                                                                                                         | APPROVED BY | DATE         |                        | MOLEX INCORPORATED     |  |  |  |
|                                                                              | ANGULAR ± 2 °                          |             |                                   | GJLOWE                                |       | 2004/03/31                                                                                                                    |             | DOCUMENT NO. |                        | SHEET NO.              |  |  |  |
|                                                                              | DRAFT WHERE APPLICABLE                 |             |                                   | MATERIAL NO.                          |       | SEE CHART                                                                                                                     |             | E-85013-0002 |                        | 2 OF 2                 |  |  |  |
|                                                                              | MUST REMAIN WITHIN DIMENSIONS          |             |                                   | SIZE                                  |       | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |             |              |                        |                        |  |  |  |
|                                                                              |                                        |             |                                   | A1                                    |       |                                                                                                                               |             |              |                        |                        |  |  |  |

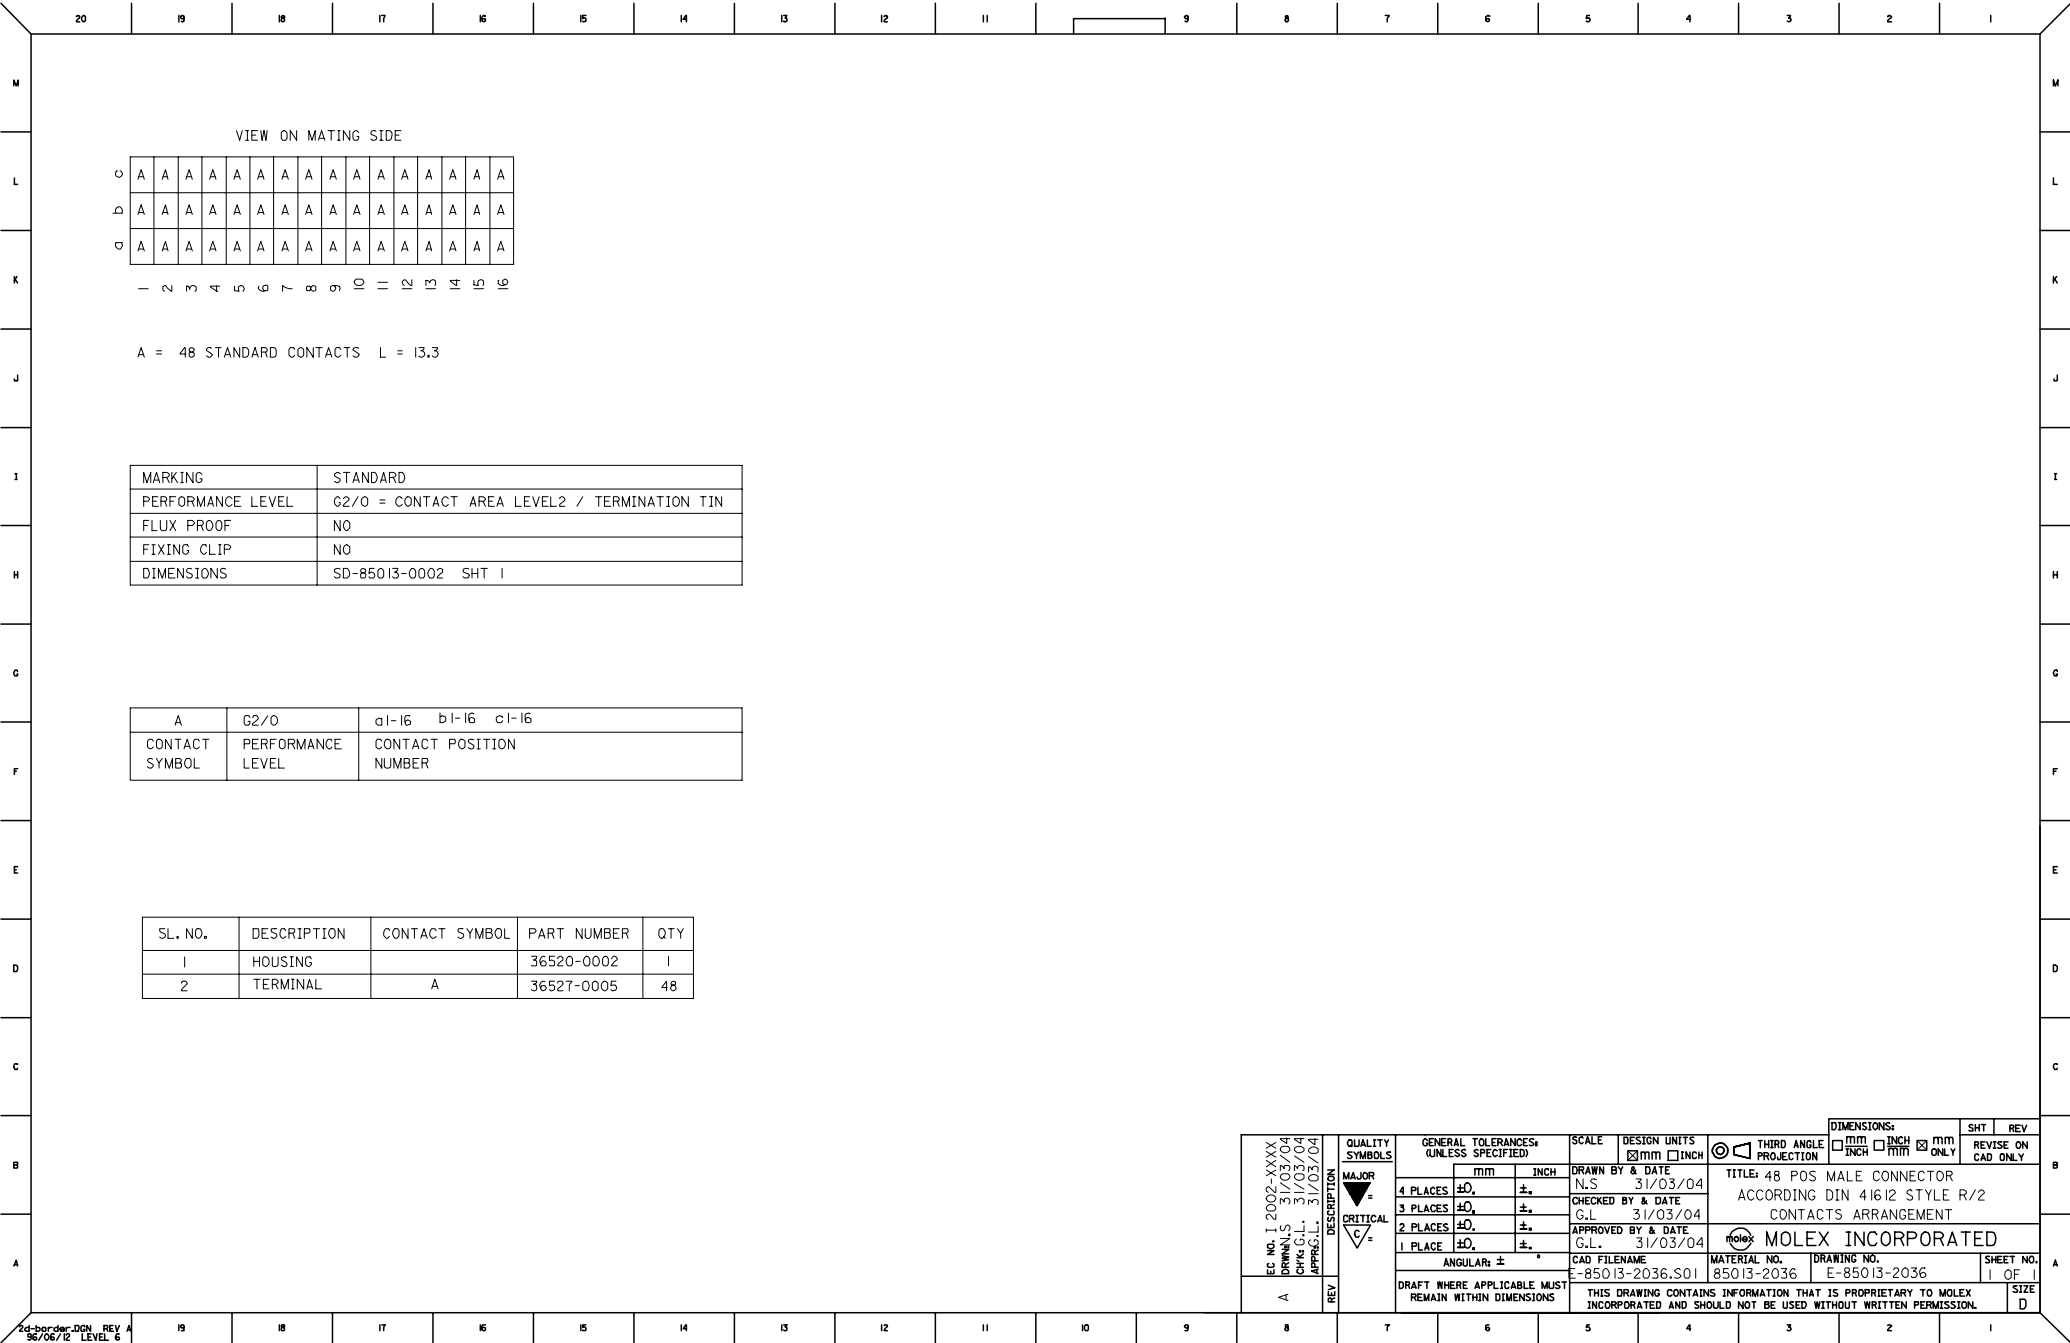

|                   |                                              |
|-------------------|----------------------------------------------|
| MARKING           | STANDARD                                     |
| PERFORMANCE LEVEL | G2/O = CONTACT AREA LEVEL2 / TERMINATION TIN |
| FLUX PROOF        | NO                                           |
| FIXING CLIP       | NO                                           |
| DIMENSIONS        | SD-85013-0002 SHT 1                          |

|                |                   |                         |
|----------------|-------------------|-------------------------|
| A              | G2/O              | a1-16 b1-16 c1-16       |
| CONTACT SYMBOL | PERFORMANCE LEVEL | CONTACT POSITION NUMBER |

| SL. NO. | DESCRIPTION | CONTACT SYMBOL | PART NUMBER | QTY |
|---------|-------------|----------------|-------------|-----|
| 1       | HOUSING     |                | 36520-0002  | 1   |
| 2       | TERMINAL    | A              | 36527-0005  | 48  |

|                                                                                    |                                      |                                        |  |                                                         |                                                                                      |                                                                                                |                                                                                       |  |                            |                             |                     |
|------------------------------------------------------------------------------------|--------------------------------------|----------------------------------------|--|---------------------------------------------------------|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--|----------------------------|-----------------------------|---------------------|
| EC NO. I 2002-XXXX<br>DRAWN: S 31/03/04<br>CHK: G.L. 31/03/04<br>APPR: L. 31/03/04 | QUALITY SYMBOLS<br>MAJOR<br>CRITICAL | GENERAL TOLERANCES: (UNLESS SPECIFIED) |  | SCALE                                                   | DESIGN UNITS<br><input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH | THIRD ANGLE PROJECTION<br><input type="checkbox"/> mm <input checked="" type="checkbox"/> INCH | DIMENSIONS:<br><input type="checkbox"/> mm <input type="checkbox"/> INCH              |  | SHT                        | REV                         |                     |
|                                                                                    |                                      | 4 PLACES $\pm 0.1$ $\pm$               |  | DRAWN BY & DATE<br>NLS 31/03/04                         |                                                                                      |                                                                                                | TITLE: 48 POS MALE CONNECTOR<br>ACCORDING DIN 41612 STYLE R/2<br>CONTACTS ARRANGEMENT |  | MATERIAL NO.<br>85013-2036 | DRAWING NO.<br>E-85013-2036 | SHEET NO.<br>1 OF 1 |
|                                                                                    |                                      | 3 PLACES $\pm 0.1$ $\pm$               |  | CHECKED BY & DATE<br>G.L. 31/03/04                      |                                                                                      |                                                                                                | MOLEX INCORPORATED                                                                    |  |                            |                             |                     |
|                                                                                    |                                      | 2 PLACES $\pm 0.1$ $\pm$               |  | APPROVED BY & DATE<br>G.L. 31/03/04                     |                                                                                      |                                                                                                | CAD FILENAME<br>E-85013-2036.S01                                                      |  |                            |                             |                     |
| 1 PLACE $\pm 0.1$ $\pm$                                                            |                                      | ANGULAR $\pm$ *                        |  | DRAFT WHERE APPLICABLE MUST<br>REMAIN WITHIN DIMENSIONS |                                                                                      |                                                                                                |                                                                                       |  |                            |                             |                     |

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16




A = 48 STANDARD CONTACTS    L = 13.3

|                |                   |                         |
|----------------|-------------------|-------------------------|
| A              | G2/O              | a1-16   b1-16   c1-16   |
| CONTACT SYMBOL | PERFORMANCE LEVEL | CONTACT POSITION NUMBER |





|                                                                                       |  |                  |     |                                                                                                                                   |                                                                                                                                                                         |                                |                                                                                                                        |                            |                         |                              |                            |                     |                                   |        |                              |      |  |
|---------------------------------------------------------------------------------------|--|------------------|-----|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------|-------------------------|------------------------------|----------------------------|---------------------|-----------------------------------|--------|------------------------------|------|--|
| EC. NO. 1.2002-XXXX<br>DRAWN. S. 31/03/04<br>CHKS G.L. 31/03/04<br>APPR. L. 31/03/04  |  | DESCRIPTION<br>B | REV | QUALITY SYMBOLS<br>MAJOR<br>CRITICAL                                                                                              | GENERAL TOLERANCES (UNLESS SPECIFIED)<br>mm INCH<br>4 PLACES $\pm 0.1$ $\pm .$<br>3 PLACES $\pm 0.1$ $\pm .$<br>2 PLACES $\pm 0.1$ $\pm .$<br>1 PLACE $\pm 0.1$ $\pm .$ |                                | SCALE<br>DRAWN BY & DATE<br>N.S. 07/02/02<br>CHECKED BY & DATE<br>G.L. 07/02/02<br>APPROVED BY & DATE<br>G.L. 07/02/02 |                            | DESIGN UNITS<br>mm INCH |                              | THIRD ANGLE PROJECTION<br> |                     | DIMENSIONS:<br>mm INCH<br>mm ONLY |        | SHIT<br>REVISION ON CAD ONLY | REV. |  |
| TITLE: 48 POS MALE CONNECTOR<br>ACCORDING DIN 41612 STYLE R/2<br>CONTACTS ARRANGEMENT |  |                  |     | MOLEX MOLEX INCORPORATED                                                                                                          |                                                                                                                                                                         | CAD FILENAME<br>S850132036.S01 |                                                                                                                        | MATERIAL NO.<br>85013-2036 |                         | DRAWING NO.<br>SD-85013-2036 |                            | SHEET NO.<br>1 OF 1 |                                   | SIZE D |                              |      |  |
| DRAFT HEREIN APPLICABLE MUST<br>REMAIN WITHIN DIMENSIONS                              |  |                  |     | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX<br>INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. |                                                                                                                                                                         |                                |                                                                                                                        |                            |                         |                              |                            |                     |                                   |        |                              |      |  |
|                                                                                       |  |                  |     |                                                                                                                                   |                                                                                                                                                                         |                                |                                                                                                                        |                            |                         |                              |                            |                     |                                   |        |                              |      |  |

PART NO.  
DWG. NO.

Section A - B  
5:1

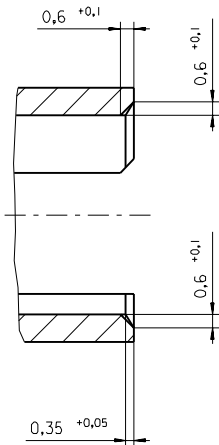

View X  
5:1

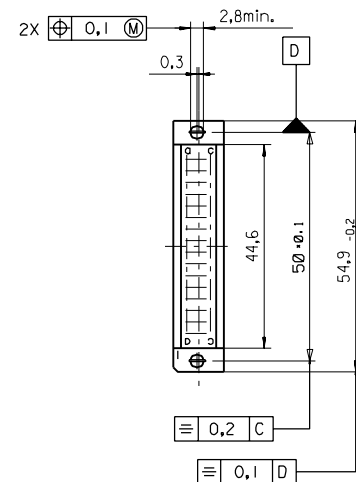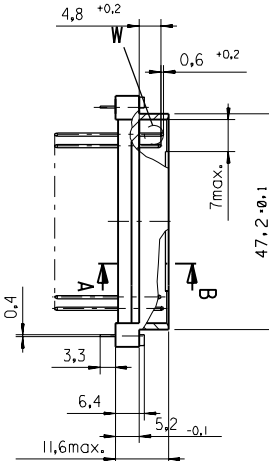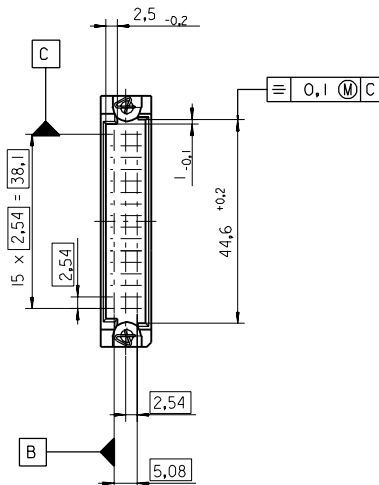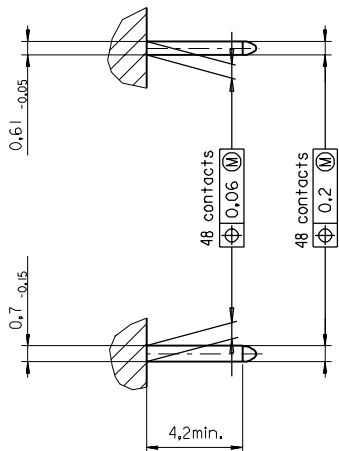

View W  
5:1

| FIRST ANGLE PROJECTION                                                                  |                                                         | REVISE ONLY ON CAD SYSTEM                                             |                | SH.                                                                                                                    | REV. |
|-----------------------------------------------------------------------------------------|---------------------------------------------------------|-----------------------------------------------------------------------|----------------|------------------------------------------------------------------------------------------------------------------------|------|
| first release<br>see ECN No. 1887                                                       | LTR<br>REVISIONS<br>FOR PREVIOUS REVISIONS SEE MRI LIST | UNLESS OTHERWISE SPECIFIED<br>TOLERANCES: ANGULAR ± 2°<br>INCH METRIC | DRWG BY<br>Ca  | CAD/CAM PROJECT NAME<br>85013000<br>621                                                                                |      |
|                                                                                         |                                                         | 3 PLACE ± . ±                                                         | CHK'D BY<br>KN | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO<br>MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |      |
|                                                                                         |                                                         | 2 PLACE ± . ±                                                         | APP'D BY       | TITLE<br>48 pos. Male connector<br>acc. DIN 41612 style R/2<br>Dimensions                                              |      |
|                                                                                         |                                                         | 1 PLACE ± . ±                                                         | SCALE          | SHEET NO. DATE<br>1 OF 95/06/08                                                                                        |      |
| DESIGN DIMENSION <input checked="" type="checkbox"/> MM<br><input type="checkbox"/> IN. |                                                         | MOLEX EUROPE                                                          |                | SIZE<br>B                                                                                                              |      |
| EQUIVALENT DIMENSION <input type="checkbox"/> MM<br><input type="checkbox"/> IN.        |                                                         | PART NO.                                                              |                | DWG. NO.                                                                                                               |      |
| IF TWO DIMENSIONS ARE SHOWN THE UPPER IS<br>THE DESIGN DIMENSION, LOWER IS SECONDARY    |                                                         | SDA-85013-0002                                                        |                | SDA-85013-0002                                                                                                         |      |

View on mating side

|   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|
| C | A | A | A | A | A | A | A | A | A |
| D | A | A | A | A | A | A | A | A | A |
| O | A | A | A | A | A | A | A | A | A |

|    |    |
|----|----|
| 1  | 1  |
| 2  | 2  |
| 3  | 3  |
| 4  | 4  |
| 5  | 5  |
| 6  | 6  |
| 7  | 7  |
| 8  | 8  |
| 9  | 9  |
| 10 | 10 |
| 11 | 11 |
| 12 | 12 |
| 13 | 13 |
| 14 | 14 |
| 15 | 15 |
| 16 | 16 |

A = 48 standard contacts L=13,3

| Marking           | Standard                                              |
|-------------------|-------------------------------------------------------|
| Performance level | G2/0 = Contact area perform. level2 / Termination tin |
| Flux proof        | no                                                    |
| Fixing clip       | no                                                    |
| Dimensions        | SDA-85013-0002 sht.1                                  |
| Technical Data    | PS-85013-0001                                         |

|                |                |                         |       |       |
|----------------|----------------|-------------------------|-------|-------|
|                |                |                         |       |       |
|                |                |                         |       |       |
| A              | G2/0           | a1-l6                   | b1-l6 | c1-l6 |
| Contact symbol | Perform. level | Contact position number |       |       |

|                                   |           |                                                                           |      |                                                                               |      |                                                                                         |            |              |                      |                                                                                                                        |                  |                        |                           |             |      |                 |       |
|-----------------------------------|-----------|---------------------------------------------------------------------------|------|-------------------------------------------------------------------------------|------|-----------------------------------------------------------------------------------------|------------|--------------|----------------------|------------------------------------------------------------------------------------------------------------------------|------------------|------------------------|---------------------------|-------------|------|-----------------|-------|
| first release<br>see ECN No. 1868 | REVISIONS | FOR PREVIOUS REVISIONS SEE MRI LIST                                       |      |                                                                               |      | UNLESS OTHERWISE SPECIFIED<br>TOLERANCES: ANGULAR $\pm 2^\circ$<br><br>INCH      METRIC | DRWG<br>BY | SIGN         | CAD/CAM PROJECT NAME | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO<br>MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | REV.             |                        |                           |             |      |                 |       |
|                                   |           | 3 PLACE $\pm$ .                                                           | INCH | C/D                                                                           | SIGN |                                                                                         |            |              |                      |                                                                                                                        |                  |                        |                           |             |      |                 |       |
|                                   |           |                                                                           |      |                                                                               |      |                                                                                         |            |              |                      |                                                                                                                        |                  | 2 PLACE $\pm$ .        | KN                        | APP'D<br>BY | SIGN |                 |       |
|                                   |           |                                                                           |      |                                                                               |      |                                                                                         |            |              |                      |                                                                                                                        |                  |                        |                           |             |      | 1 PLACE $\pm$ . | SCALE |
|                                   |           |                                                                           |      |                                                                               |      |                                                                                         |            |              |                      |                                                                                                                        |                  |                        |                           |             |      |                 |       |
| A                                 | LTR       | DESIGN DIMENSION <input type="checkbox"/> MM <input type="checkbox"/> IN. |      | EQUIVALENT DIMENSION <input type="checkbox"/> MM <input type="checkbox"/> IN. |      | TITLE                                                                                   |            | MOLEX EUROPE |                      | SHEET NO.<br>1 OF 1                                                                                                    | DATE<br>95/06/07 | PART NO.<br>85013-2036 | DWG NO.<br>SDA-85013-2036 | SIZE<br>A   |      |                 |       |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)