

# AS85049/11 and MS3437B Straight Environmental Backshell



AS85049

## CONNECTOR DESIGNATOR:

**A**

AS50151 Series AS34001  
MIL-DTL-26482 Series II  
AS81703 Series III  
MIL-DTL-83723 Series I & III  
40M39569, DEF 5326-3, EN 2997  
EN 3646, ESC 10, ESC 11, LN 29504  
NFC93422 Series HE302  
PAN 6432-1, PAN 6432-2, PATT 602

**Basic  
Part Number**

**Dash Number  
(Table II)**

**M85049/11 - 21 N**

**Superseded  
Part Number**

**MS3437B 21 N**

**Basic  
Part No.**


**Dash  
No.**

**Finish  
(Material is Aluminum Only)**


**A** = Cadmium Olive Drab over Nickel  
**C** = Cadmium Olive Drab  
**N** = Electroless Nickel

## Finish / Material

**B** = Black Cadmium / Stainless Steel  
**N** = Electroless Nickel / Aluminum  
**S** = Passivated / Stainless Steel  
**W** = 1,000 Hr. Cadmium Olive Drab over Electroless Nickel / Aluminum  
**X** = Nickel Fluorocarbon Polymer / Aluminum  
**Y** = Pure Dense Electrodeposited Aluminum / Aluminum  
**Z** = Zinc Nickel, Black / Aluminum  
**XS** = Nickel Fluorocarbon Polymer / Stainless Steel  
**YS** = Pure Dense Electrodeposited Aluminum / Stainless Steel  
**ZS** = Zinc Nickel, Black / Stainless Steel



**STYLE 2**

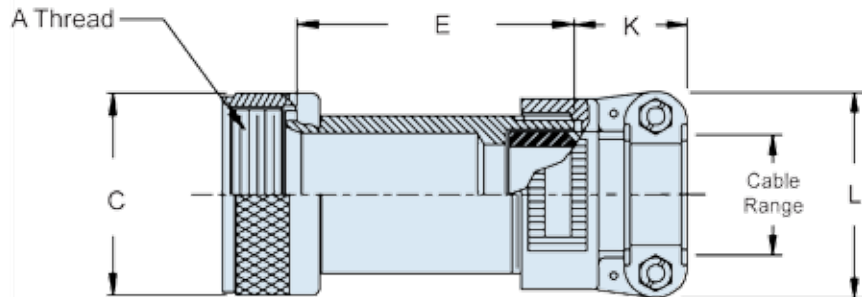

**STYLE 1**


**TABLE I: Shell Size and Dimensions**

| Shell Size | A Thread Class 2B-LH | C Dia Max    |
|------------|----------------------|--------------|
| 3          | .562 - 24 UNEF       | .669 (17.0)  |
| 8          | .500 - 20 UNF        | .617 (15.7)  |
| 10         | .625 - 24 UNEF       | .734 (18.6)  |
| 12         | .750 - 20 UNEF       | .858 (21.8)  |
| 14         | .875 - 20 UNEF       | .984 (25.0)  |
| 16         | 1.000 - 20 UNEF      | 1.112 (28.2) |
| 18         | 1.062 - 18 UNEF      | 1.218 (30.9) |
| 20         | 1.188 - 18 UNEF      | 1.345 (34.2) |
| 22         | 1.313 - 18 UNEF      | 1.468 (37.3) |
| 24         | 1.438 - 18 UNEF      | 1.593 (40.5) |
| 28         | 1.750 - 18 UNS       | 1.969 (50.0) |
| 32         | 2.000 - 18 UNS       | 2.219 (56.4) |
| 36         | 2.250 - 16 UN        | 2.469 (62.7) |
| 40         | 2.500 - 16 UN        | 2.719 (69.1) |
| 44         | 2.750 - 16 UN        | 2.969 (75.4) |
| 48         | 3.000 - 16 UN        | 3.219 (81.8) |
| 61         | 1.500 - 18 UNEF      | 1.653 (42.0) |

## APPLICATION NOTES

- For complete dimensions see the applicable Military Specification.
- Metric dimensions (mm) are in parentheses.
- When maximum cable entry is exceeded, Style 2 will be supplied.
- Cable Range is defined as the accommodation range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.

Dimensions in inches (millimeters) and are subject to change without notice.

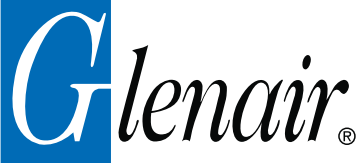

# AS85049/11 and MS3437B Straight Environmental Backshell

B

TABLE II: Dash Number and Cable Range (Continued on Page B-33)

| Dash No. | Shell Size | Style | E Max         | K Ref.       | L Max        | Cable Range Min | Cable Range Max | M85049/42 Ref. |
|----------|------------|-------|---------------|--------------|--------------|-----------------|-----------------|----------------|
| 01       | 3          | 1     | 2.125 (54.0)  | 1.027 (26.1) | .957 (24.3)  | .125 (3.2)      | .250 (6.4)      | 4              |
| 02       | 3          | 1     | 3.125 (79.4)  | 1.027 (26.1) | .957 (24.3)  | .125 (3.2)      | .250 (6.4)      | 4              |
| 03       | 3          | 2     | 2.875 (73.0)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 04       | 3          | 2     | 3.875 (98.4)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 05       | 8          | 1     | 2.125 (54.0)  | 1.027 (26.1) | .957 (24.3)  | .125 (3.2)      | .250 (6.4)      | 4              |
| 06       | 8          | 1     | 3.125 (79.4)  | 1.027 (26.1) | .957 (24.3)  | .125 (3.2)      | .250 (6.4)      | 4              |
| 07       | 8          | 2     | 2.875 (73.0)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 08       | 8          | 2     | 3.875 (98.4)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 09       | 10         | 1     | 2.125 (54.0)  | 1.027 (26.1) | .957 (24.3)  | .125 (3.2)      | .312 (7.9)      | 4              |
| 10       | 10         | 1     | 3.125 (79.4)  | 1.027 (26.1) | .957 (24.3)  | .125 (3.2)      | .312 (7.9)      | 4              |
| 11       | 10         | 2     | 2.875 (73.0)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 12       | 10         | 2     | 3.875 (98.4)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 13       | 12         | 1     | 2.125 (54.0)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 14       | 12         | 1     | 3.125 (79.4)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 15       | 12         | 2     | 2.875 (73.0)  | 1.027 (26.1) | 1.332 (33.8) | .350 (8.9)      | .625 (15.9)     | 10             |
| 16       | 12         | 2     | 3.875 (98.4)  | 1.027 (26.1) | 1.332 (33.8) | .350 (8.9)      | .625 (15.9)     | 10             |
| 17       | 14         | 1     | 2.125 (54.0)  | 1.027 (26.1) | 1.332 (33.8) | .350 (8.9)      | .575 (14.6)     | 10             |
| 18       | 14         | 1     | 3.125 (79.4)  | 1.027 (26.1) | 1.332 (33.8) | .350 (8.9)      | .575 (14.6)     | 10             |
| 19       | 14         | 2     | 2.875 (73.0)  | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |
| 20       | 14         | 2     | 3.875 (98.4)  | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |
| 21       | 16         | 1     | 2.125 (54.0)  | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .700 (17.8)     | 12             |
| 22       | 16         | 1     | 3.125 (79.4)  | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .700 (17.8)     | 12             |
| 23       | 16         | 2     | 2.875 (73.0)  | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 24       | 16         | 2     | 3.875 (98.4)  | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 25       | 18         | 1     | 2.125 (54.0)  | 1.027 (26.1) | 1.332 (33.8) | .350 (8.9)      | .625 (15.9)     | 10             |
| 26       | 18         | 1     | 3.125 (79.4)  | 1.027 (26.1) | 1.332 (33.8) | .350 (8.9)      | .625 (15.9)     | 10             |
| 27       | 18         | 1     | 2.125 (54.0)  | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |
| 28       | 18         | 1     | 3.125 (79.4)  | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |
| 29       | 18         | 2     | 2.875 (73.0)  | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 30       | 18         | 2     | 3.875 (98.4)  | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 31       | 20         | 1     | 3.125 (79.4)  | 1.027 (26.1) | 1.332 (33.8) | .350 (8.9)      | .625 (15.9)     | 10             |
| 32       | 20         | 1     | 4.125 (104.8) | 1.027 (26.1) | 1.332 (33.8) | .350 (8.9)      | .625 (15.9)     | 10             |
| 33       | 20         | 1     | 3.125 (79.4)  | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |
| 34       | 20         | 1     | 4.125 (104.8) | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |
| 35       | 20         | 2     | 3.875 (98.4)  | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 36       | 20         | 2     | 4.875 (123.8) | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 37       | 20         | 2     | 3.875 (98.4)  | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 38       | 20         | 2     | 4.875 (123.8) | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 39       | 22         | 1     | 3.125 (79.4)  | 1.027 (26.1) | 1.332 (33.8) | .350 (8.9)      | .625 (15.9)     | 10             |
| 40       | 22         | 1     | 4.125 (104.8) | 1.027 (26.1) | 1.332 (33.8) | .350 (8.9)      | .625 (15.9)     | 10             |
| 41       | 22         | 1     | 3.125 (79.4)  | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |
| 42       | 22         | 1     | 4.125 (104.8) | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |
| 43       | 22         | 1     | 3.125 (79.4)  | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 44       | 22         | 1     | 4.125 (104.8) | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 45       | 22         | 2     | 3.875 (98.4)  | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 46       | 22         | 2     | 4.875 (123.8) | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 47       | 24         | 1     | 3.125 (79.4)  | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |
| 48       | 24         | 1     | 4.125 (104.8) | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |
| 49       | 24         | 1     | 3.125 (79.4)  | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .812 (20.6)     | 16             |
| 50       | 24         | 1     | 4.125 (104.8) | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .812 (20.6)     | 16             |
| 51       | 24         | 1     | 3.125 (79.4)  | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 52       | 24         | 1     | 4.125 (104.8) | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |

Continued on Page B-33

Dimensions in inches (millimeters) and are subject to change without notice.

# AS85049/11 and MS3437B Straight Environmental Backshell



AS85049

B

TABLE II: Dash Number and Cable Range (Continued From Page B-32)

| Dash No. | Shell Size | Style | E Max         | K Ref.       | L Max        | Cable Range Min | Cable Range Max | M85049/42 Ref. |
|----------|------------|-------|---------------|--------------|--------------|-----------------|-----------------|----------------|
| 53       | 24         | 2     | 3.875 (98.4)  | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 54       | 24         | 2     | 4.875 (123.8) | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 55       | 28         | 1     | 3.125 (79.4)  | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |
| 56       | 28         | 1     | 4.125 (104.8) | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |
| 57       | 28         | 1     | 3.125 (79.4)  | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 58       | 28         | 1     | 4.125 (104.8) | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 59       | 28         | 1     | 3.125 (79.4)  | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 60       | 28         | 1     | 4.125 (104.8) | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 61       | 28         | 1     | 3.125 (79.4)  | 1.500 (38.1) | 2.363 (60.0) | 1.000 (25.4)    | 1.375 (34.9)    | 24             |
| 62       | 28         | 1     | 4.125 (104.8) | 1.500 (38.1) | 2.363 (60.0) | 1.000 (25.4)    | 1.375 (34.9)    | 24             |
| 63       | 32         | 1     | 3.125 (79.4)  | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 64       | 32         | 1     | 4.125 (104.8) | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 65       | 32         | 1     | 3.125 (79.4)  | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 66       | 32         | 1     | 4.125 (104.8) | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 67       | 32         | 1     | 3.125 (79.4)  | 1.500 (38.1) | 2.363 (60.0) | 1.000 (25.4)    | 1.375 (34.9)    | 24             |
| 68       | 32         | 1     | 4.125 (104.8) | 1.500 (38.1) | 2.363 (60.0) | 1.000 (25.4)    | 1.375 (34.9)    | 24             |
| 69       | 32         | 1     | 3.125 (79.4)  | 1.781 (45.2) | 2.770 (70.4) | 1.250 (31.8)    | 1.625 (41.3)    | 28             |
| 70       | 32         | 1     | 4.125 (104.8) | 1.781 (45.2) | 2.770 (70.4) | 1.250 (31.8)    | 1.625 (41.3)    | 28             |
| 71       | 36         | 1     | 4.125 (104.8) | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 72       | 36         | 1     | 5.125 (130.2) | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 73       | 36         | 1     | 4.125 (104.8) | 1.500 (38.1) | 2.363 (60.0) | 1.000 (25.4)    | 1.375 (34.9)    | 24             |
| 74       | 36         | 1     | 5.125 (130.2) | 1.500 (38.1) | 2.363 (60.0) | 1.000 (25.4)    | 1.375 (34.9)    | 24             |
| 75       | 36         | 1     | 4.125 (104.8) | 1.781 (45.2) | 2.770 (70.4) | 1.250 (31.8)    | 1.625 (41.3)    | 28             |
| 76       | 36         | 1     | 5.125 (130.2) | 1.781 (45.2) | 2.770 (70.4) | 1.250 (31.8)    | 1.625 (41.3)    | 28             |
| 77       | 36         | 2     | 5.000 (127.0) | 1.830 (46.5) | 3.020 (76.7) | 1.437 (36.5)    | 1.875 (47.6)    | 32             |
| 78       | 36         | 2     | 6.000 (152.4) | 1.830 (46.5) | 3.020 (76.7) | 1.437 (36.5)    | 1.875 (47.6)    | 32             |
| 79       | 40         | 1     | 4.125 (104.8) | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 80       | 40         | 1     | 5.125 (130.2) | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 81       | 40         | 1     | 4.125 (104.8) | 1.500 (38.1) | 2.363 (60.0) | 1.000 (25.4)    | 1.375 (34.9)    | 24             |
| 82       | 40         | 1     | 5.125 (130.2) | 1.500 (38.1) | 2.363 (60.0) | 1.000 (25.4)    | 1.375 (34.9)    | 24             |
| 83       | 40         | 1     | 4.125 (104.8) | 1.781 (45.2) | 2.770 (70.4) | 1.250 (31.8)    | 1.625 (41.3)    | 28             |
| 84       | 40         | 1     | 5.125 (130.2) | 1.781 (45.2) | 2.770 (70.4) | 1.250 (31.8)    | 1.625 (41.3)    | 28             |
| 85       | 40         | 1     | 4.125 (104.8) | 1.830 (46.5) | 3.020 (76.7) | 1.437 (36.5)    | 1.875 (47.6)    | 32             |
| 86       | 40         | 1     | 5.125 (130.2) | 1.830 (46.5) | 3.020 (76.7) | 1.437 (36.5)    | 1.875 (47.6)    | 32             |
| 87       | 44         | 1     | 4.125 (104.8) | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 88       | 44         | 1     | 5.125 (130.2) | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 89       | 44         | 1     | 4.125 (104.8) | 1.500 (38.1) | 2.363 (60.0) | 1.000 (25.4)    | 1.375 (34.9)    | 24             |
| 90       | 44         | 1     | 5.125 (130.2) | 1.500 (38.1) | 2.363 (60.0) | 1.000 (25.4)    | 1.375 (34.9)    | 24             |
| 91       | 44         | 1     | 4.125 (104.8) | 1.781 (45.2) | 2.770 (70.4) | 1.250 (31.8)    | 1.625 (41.3)    | 28             |
| 92       | 44         | 1     | 5.125 (130.2) | 1.781 (45.2) | 2.770 (70.4) | 1.250 (31.8)    | 1.625 (41.3)    | 28             |
| 93       | 44         | 1     | 4.125 (104.8) | 1.830 (46.5) | 3.020 (76.7) | 1.437 (36.5)    | 1.875 (47.6)    | 32             |
| 94       | 44         | 1     | 5.125 (130.2) | 1.830 (46.5) | 3.020 (76.7) | 1.437 (36.5)    | 1.875 (47.6)    | 32             |
| 95       | 48         | 1     | 4.125 (104.8) | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 96       | 48         | 1     | 5.125 (130.2) | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 97       | 48         | 1     | 4.125 (104.8) | 1.500 (38.1) | 2.363 (60.0) | 1.000 (25.4)    | 1.375 (34.9)    | 24             |
| 98       | 48         | 1     | 5.125 (130.2) | 1.500 (38.1) | 2.363 (60.0) | 1.000 (25.4)    | 1.375 (34.9)    | 24             |
| 99       | 48         | 1     | 4.125 (104.8) | 1.781 (45.2) | 2.770 (70.4) | 1.250 (31.8)    | 1.625 (41.3)    | 28             |
| 100      | 48         | 1     | 5.125 (130.2) | 1.781 (45.2) | 2.770 (70.4) | 1.250 (31.8)    | 1.625 (41.3)    | 28             |
| 101      | 48         | 1     | 4.125 (104.8) | 1.830 (46.5) | 3.020 (76.7) | 1.437 (36.5)    | 1.875 (47.6)    | 32             |
| 102      | 48         | 1     | 5.125 (130.2) | 1.830 (46.5) | 3.020 (76.7) | 1.437 (36.5)    | 1.875 (47.6)    | 32             |
| 103      | 61         | 1     | 3.125 (79.4)  | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |
| 104      | 61         | 1     | 4.125 (104.8) | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |

Continued on Page B-34

Dimensions in inches (millimeters) and are subject to change without notice.

© 2013 Glenair, Inc.

U.S. CAGE Code 06324

Printed in U.S.A.



# AS85049/11 and MS3437B Straight Environmental Backshell

B

TABLE II: Dash Number and Cable Range (Continued From Page B-33)

| Dash No. | Shell Size | Style | E Max         | K Ref.       | L Max        | Cable Range Min | Cable Range Max | M85049/42 Ref. |
|----------|------------|-------|---------------|--------------|--------------|-----------------|-----------------|----------------|
| 105      | 61         | 1     | 3.125 (79.4)  | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 106      | 61         | 1     | 4.125 (104.8) | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 107      | 61         | 2     | 3.875 (98.4)  | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 108      | 61         | 2     | 4.875 (123.8) | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.250 (31.8)    | 20             |
| 109      | 61         | 2     | 3.875 (98.4)  | 1.500 (38.1) | 2.363 (60.0) | 1.000 (25.4)    | 1.375 (34.9)    | 24             |
| 110      | 61         | 2     | 4.875 (123.8) | 1.500 (38.1) | 2.363 (60.0) | 1.000 (25.4)    | 1.375 (34.9)    | 24             |
| 111      | 12         | 1     | 2.125 (54.0)  | 1.027 (26.1) | 1.332 (33.8) | .350 (8.9)      | .500 (12.7)     | 10             |
| 112      | 16         | 1     | 2.125 (54.0)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 113      | 16         | 1     | 3.125 (79.4)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 114      | 12         | 1     | 2.125 (54.0)  | 1.027 (26.1) | .957 (24.3)  | .125 (3.2)      | .312 (7.9)      | 4              |
| 115      | 12         | 1     | 3.125 (79.4)  | 1.027 (26.1) | .957 (24.3)  | .125 (3.2)      | .312 (7.9)      | 4              |
| 116      | 14         | 1     | 2.125 (54.0)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 117      | 14         | 1     | 3.125 (79.4)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 118      | 16         | 1     | 2.125 (54.0)  | 1.027 (26.1) | 1.332 (33.8) | .350 (8.9)      | .625 (15.9)     | 10             |
| 119      | 16         | 1     | 3.125 (79.4)  | 1.027 (26.1) | 1.332 (33.8) | .350 (8.9)      | .625 (15.9)     | 10             |
| 120      | 18         | 1     | 2.125 (54.0)  | 1.027 (26.1) | .957 (24.3)  | .125 (3.2)      | .312 (7.9)      | 4              |
| 121      | 18         | 1     | 3.125 (79.4)  | 1.027 (26.1) | .957 (24.3)  | .125 (3.2)      | .312 (7.9)      | 4              |
| 122      | 18         | 1     | 2.125 (54.0)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 123      | 18         | 1     | 3.125 (79.4)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 124      | 20         | 1     | 3.125 (79.4)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 125      | 20         | 1     | 4.125 (104.8) | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 126      | 22         | 1     | 3.125 (79.4)  | 1.027 (26.1) | .957 (24.3)  | .125 (3.2)      | .312 (7.9)      | 4              |
| 127      | 22         | 1     | 4.125 (104.8) | 1.027 (26.1) | .957 (24.3)  | .125 (3.2)      | .312 (7.9)      | 4              |
| 128      | 22         | 1     | 3.125 (79.4)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 129      | 22         | 1     | 4.125 (104.8) | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .437 (11.1)     | 6              |
| 130      | 24         | 1     | 3.125 (79.4)  | 1.027 (26.1) | 1.332 (33.8) | .350 (8.9)      | .625 (15.9)     | 10             |
| 131      | 24         | 1     | 4.125 (104.8) | 1.027 (26.1) | 1.332 (33.8) | .350 (8.9)      | .625 (15.9)     | 10             |
| 132      | 36         | 1     | 4.125 (104.8) | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |
| 133      | 36         | 1     | 5.125 (130.2) | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |
| 134      | 40         | 1     | 4.125 (104.8) | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |
| 135      | 40         | 1     | 5.125 (130.2) | 1.059 (26.9) | 1.551 (39.4) | .500 (12.7)     | .750 (19.1)     | 12             |
| 136      | 10         | 1     | 2.125 (54.0)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .375 (9.5)      | 6              |
| 137      | 10         | 1     | 3.125 (79.4)  | 1.027 (26.1) | 1.145 (29.1) | .250 (6.4)      | .375 (9.5)      | 6              |
| 138      | 12         | 1     | 2.125 (54.0)  | 1.027 (26.1) | 1.332 (33.8) | .350 (8.9)      | .500 (12.7)     | 10             |
| 139      | 12         | 1     | 3.125 (79.4)  | 1.027 (26.1) | 1.332 (33.8) | .350 (8.9)      | .500 (12.7)     | 10             |
| 140      | 20         | 1     | 3.125 (79.4)  | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .904 (23.0)     | 16             |
| 141      | 20         | 1     | 4.125 (104.8) | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .904 (23.0)     | 16             |
| 142      | 22         | 1     | 3.125 (79.4)  | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.029 (26.1)    | 20             |
| 143      | 22         | 1     | 4.125 (104.8) | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.029 (26.1)    | 20             |
| 144      | 24         | 1     | 3.125 (79.4)  | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.144 (29.1)    | 20             |
| 145      | 24         | 1     | 4.125 (104.8) | 1.375 (34.9) | 2.113 (53.7) | .875 (22.2)     | 1.144 (29.1)    | 20             |
| 146      | 36         | 1     | 4.125 (104.8) | 1.830 (46.5) | 3.020 (76.7) | 1.437 (36.5)    | 1.840 (46.7)    | 32             |
| 147      | 36         | 1     | 5.125 (130.2) | 1.830 (46.5) | 3.020 (76.7) | 1.437 (36.5)    | 1.840 (46.7)    | 32             |
| 148      | 38         | 1     | 4.125 (104.8) | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 149      | 38         | 1     | 5.125 (130.2) | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 150      | 14         | 1     | 2.125 (54.0)  | 1.027 (26.1) | .957 (24.3)  | .125 (3.2)      | .312 (7.9)      | 4              |
| 151      | 14         | 1     | 3.125 (79.4)  | 1.027 (26.1) | .957 (24.3)  | .125 (3.2)      | .312 (7.9)      | 4              |
| 152      | 16         | 1     | 2.125 (54.0)  | 1.027 (26.1) | .957 (24.3)  | .125 (3.2)      | .312 (7.9)      | 4              |
| 153      | 16         | 1     | 3.125 (79.4)  | 1.027 (26.1) | .957 (24.3)  | .125 (3.2)      | .312 (7.9)      | 4              |
| 154      | 44         | 1     | 4.125 (104.8) | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 155      | 44         | 1     | 5.125 (130.2) | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 156      | 40         | 1     | 4.125 (104.8) | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |
| 157      | 40         | 1     | 5.125 (130.2) | 1.156 (29.4) | 1.770 (45.0) | .625 (15.9)     | .937 (23.8)     | 16             |

Dimensions in inches (millimeters) and are subject to change without notice.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)