


# DIO20881/1D/2/4

## 600nA, Rail-to-Rail Input/ Output Low Power Amplifier

### Features

- Ultra low power: 600nA per channel
- Unity Gain Stable
- Gain Bandwidth Product: 14kHz
- Wide supply range: 1.4V to 5.5V
- Available in SOT23-5, SOT23-6, SOIC-8, MSOP-8, SOP-14 and TSSOP-14 packages
- Temperature Range:
  - Industrial: -40°C to +85°C
  - Extended: -40°C to +125°C

### Typical Applications

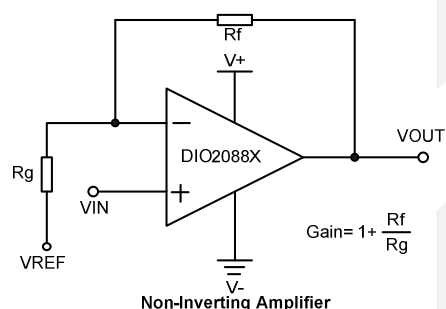

### Descriptions

DIO2088x is a family of ultra low power operational amplifier, with rail-to-rail CMOS input/output and single/dual channels selectable. DIO2088x family has a gain-bandwidth product of 14kHz, wide operating supply voltage from 1.4V to 5.5V and broad output voltage swing.

DIO2088x consumes ultra low power, with each channel 600nA of bias current, which makes DIO2088x be ideal for battery powered device, temperature-sense device, etc.

The DIO2088x operational amplifier family is available in single (DIO20881/1D), and dual (DIO20882), and quad (DIO20884) configurations. Furthermore, the DIO20881 is offered in the 5-lead SOT23 package. All types of amplifiers are fully specified over the extended -40°C to +125°C temperature range.

### Applications

- Portable Equipment
- Active Filters
- Data Acquisition
- Portable Equipment
- Test Equipment
- Broadband Communication
- Process Control
- Audio and Video Processing

### Ordering Information

| Order Part Number | Top Marking |               | T <sub>A</sub> | Package  |                   |
|-------------------|-------------|---------------|----------------|----------|-------------------|
| DIO20881ST5       | YW(X)Z      | Green or RoHS | -40 to +125°C  | SOT23-5  | Tape & Reel, 3000 |
| DIO20881SO8       | DIO2081     | Green or RoHS | -40 to +125°C  | SOIC-8   | Tape & Reel, 2500 |
| DIO20881MP8       | DIO2081     | Green or RoHS | -40 to +125°C  | MSOP-8   | Tape & Reel, 3000 |
| DIO20881DST6      | YWDL        | Green or RoHS | -40 to +125°C  | SOT23-6  | Tape & Reel, 3000 |
| DIO20881DSO8      | D20881D     | Green or RoHS | -40 to +125°C  | SOIC-8   | Tape & Reel, 2500 |
| DIO20881DMP8      | D20881D     | Green or RoHS | -40 to +125°C  | MSOP-8   | Tape & Reel, 3000 |
| DIO20882SO8       | DIO2082     | Green or RoHS | -40 to +125°C  | SOIC-8   | Tape & Reel, 2500 |
| DIO20882MP8       | DIO2082     | Green or RoHS | -40 to +125°C  | MSOP-8   | Tape & Reel, 3000 |
| DIO20884CS14      | DIO2084     | Green or RoHS | -40 to +125°C  | SOP-14   | Tape & Reel, 2500 |
| DIO20884TP14      | DIO2084     | Green or RoHS | -40 to +125°C  | TSSOP-14 | Tape & Reel, 2500 |

## Pin Assignments

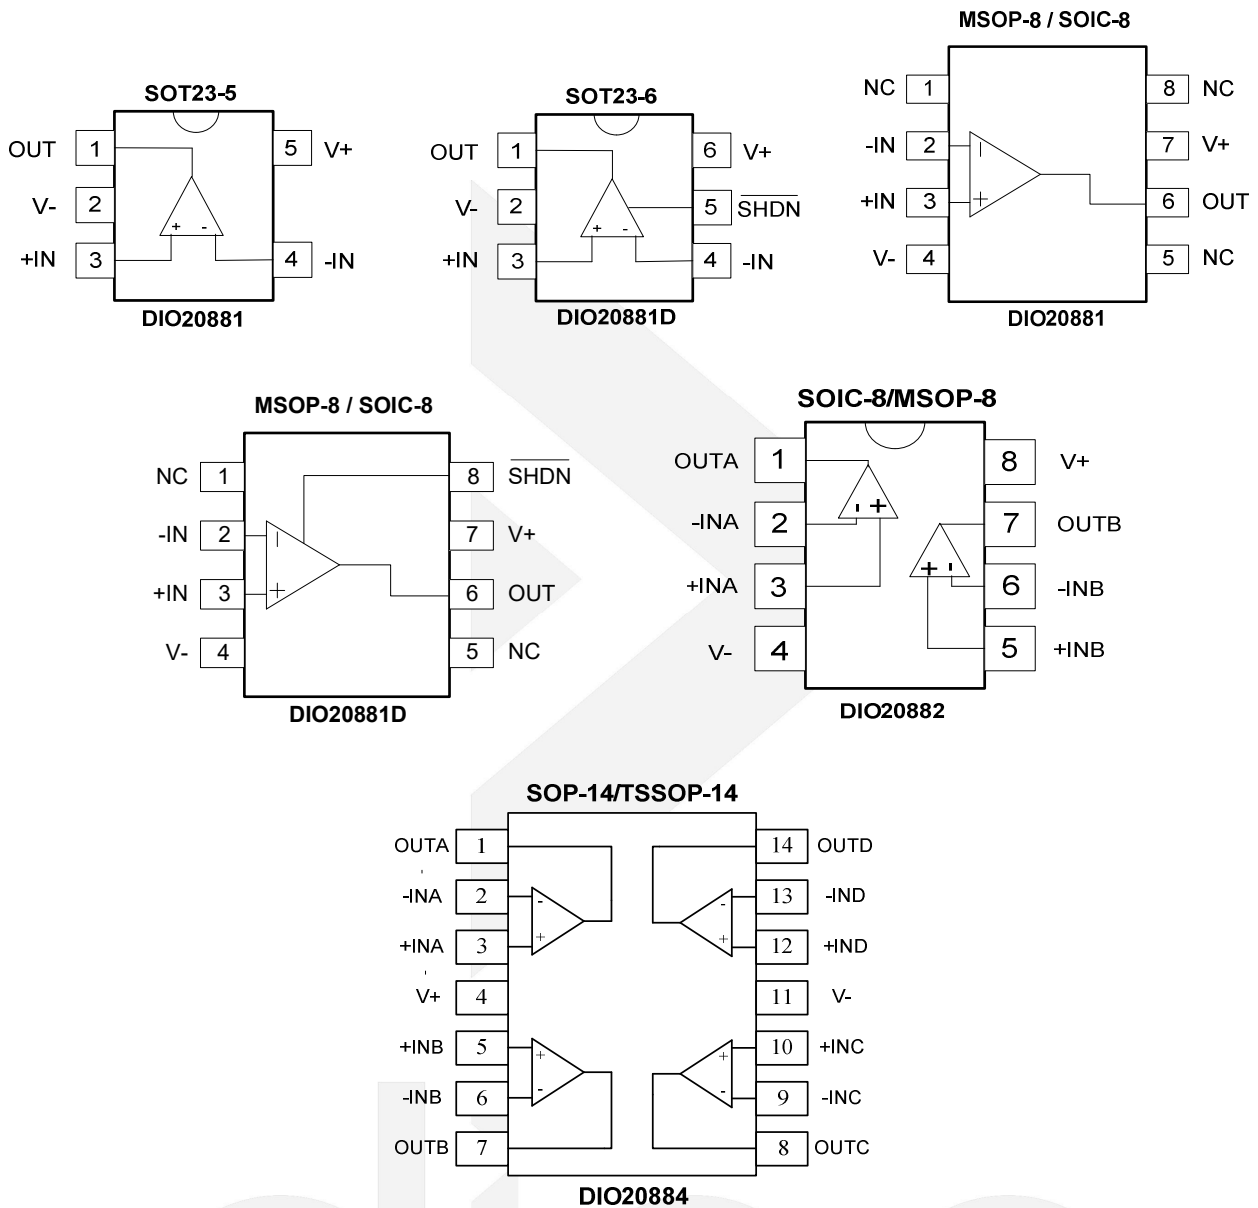


Figure 1 Top View

## Pin Description

| Pin name | Description         |
|----------|---------------------|
| V+       | Positive supply     |
| V-       | Negative supply     |
| +INX     | Positive Input      |
| -INX     | Negative Input      |
| OUTX     | Output              |
| SHDN     | Active Low Shutdown |

## Absolute Maximum Ratings

Stresses beyond those listed under “Absolute Maximum Rating” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

| Parameter                 |                         | Rating                 | Unit |
|---------------------------|-------------------------|------------------------|------|
| Supply Voltage ( V+ – V-) |                         | 7                      | V    |
| Input Voltage             |                         | (V-)-0.3V to (V+)+0.3V | V    |
| Difference Input Voltage  |                         | V+ – V-                | V    |
| Storage Temperature Range |                         | -65 to 150             | °C   |
| Junction Temperature      |                         | 150                    | °C   |
| Lead Temperature Range    |                         | 260                    | °C   |
| ESD                       | HBM, JEDEC: JESD22-A114 | 8                      | kV   |
|                           | CDM, JEDEC: JESD22-C101 | 2                      |      |

## Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation to ensure optimal performance to the datasheet specifications. DIOO does not recommend exceeding them or designing to Absolute Maximum Ratings.

| Parameter                   |  | Rating     | Unit |
|-----------------------------|--|------------|------|
| Supply Voltage              |  | 1.4 to 5.5 | V    |
| Input Voltage               |  | 0 to 5     | V    |
| Operating Temperature Range |  | -40 to 125 | °C   |



# DIO20881//1D/2/4

600nA, Rail-to-Rail Input/ Output Low Power Amplifier

## Electrical Characteristics


Typical value:  $V_{+}=5V$ ,  $R_L=1M\Omega$  to  $V_{+}/2$ ,  $V_{CM}=1/2V_{+}$ ,  $T_A = 25^{\circ}C$ , unless otherwise specified.

| Symbol                 | Parameter                          | Conditions                                                          | Min. | Typ.  | Max.                      | Unit   |
|------------------------|------------------------------------|---------------------------------------------------------------------|------|-------|---------------------------|--------|
| INPUT CHARACTERISTICS  |                                    |                                                                     |      |       |                           |        |
| V <sub>OS</sub>        | Input Offset Voltage               | -40°C≤T <sub>A</sub> ≤125°C, V <sub>+</sub> =1.4V to 5.5V           | -2   |       | +2                        | mV     |
| I <sub>B</sub>         | Input Bias Current                 | V <sub>+</sub> =1.4V to 5.5V                                        |      | 1     |                           | pA     |
| I <sub>OS</sub>        | Input Offset Current               | V <sub>+</sub> =1.4V to 5.5V                                        |      | 1     |                           | pA     |
| V <sub>CM</sub>        | Common Mode Voltage Range          |                                                                     | -0.1 |       | (V <sub>+</sub> )<br>+0.1 | V      |
| CMRR                   | Common Mode Rejection Ratio        | -40°C≤T <sub>A</sub> ≤125°C,                                        | 100  |       |                           | dB     |
| A <sub>OL</sub>        | Open Loop Voltage Gain             | R <sub>L</sub> =50kΩ, V <sub>O</sub> = 0.1 to (V <sub>+</sub> )-0.1 | 70   | 87    |                           | dB     |
| ΔV <sub>OS</sub> /ΔT   | Input Offset Voltage Drift         | -40°C≤T <sub>A</sub> ≤125°C                                         |      | ±5    |                           | μV/°C  |
| OUTPUT CHARACTERISTICS |                                    |                                                                     |      |       |                           |        |
| V <sub>OH</sub>        | Output Voltage High                | R <sub>L</sub> =50kΩ -40°C≤T <sub>A</sub> ≤125°C                    |      | 4.992 |                           | V      |
| V <sub>OL</sub>        | Output Voltage Low                 | R <sub>L</sub> =50kΩ -40°C≤T <sub>A</sub> ≤125°C                    |      | 8     | 15                        | mV     |
| I <sub>SC</sub>        | Output Short Circuit Current       | Source I <sub>SC</sub> , V <sub>+</sub> =5V                         |      | 30    |                           | mA     |
|                        |                                    | Sink I <sub>SC</sub> , V <sub>+</sub> =5V                           |      | 30    |                           |        |
| POWER SUPPLY           |                                    |                                                                     |      |       |                           |        |
| PSRR                   | Power Supply Rejection Ration      |                                                                     | 100  |       |                           | dB     |
| I <sub>Q</sub>         | Supply Current per Channel/Amp     | -40°C≤T <sub>A</sub> ≤125°C                                         |      | 600   | 1000                      | nA     |
| I <sub>Q(off)</sub>    | Supply Current in Shutdown         | V <sub>SHDN</sub> =0V                                               |      | 3     |                           | nA     |
| I <sub>SHDN</sub>      | Shutdown Pin Current               |                                                                     |      | -10   |                           | pA     |
| I <sub>LEAK</sub>      | Output Leakage Current in Shutdown | V <sub>SHDN</sub> =0V                                               |      | 3.6   |                           | pA     |
| V <sub>IL</sub>        | SHDN Input Low Voltage             | Disable                                                             |      |       | 0.5                       | V      |
| V <sub>IH</sub>        | SHDN Input High Voltage            | Enable                                                              | 1.1  |       |                           | V      |
| DYNAMIC PERFORMANCE    |                                    |                                                                     |      |       |                           |        |
| GBP                    | Gain Bandwidth Product             | C <sub>L</sub> =60pF                                                |      | 14    |                           | kHz    |
| SR                     | Slew Rate                          | G=1, 2V Output Step                                                 |      | 3.5   |                           | V/ms   |
| t <sub>s</sub>         | Setting Time                       | G=1, 2V Output Step                                                 |      | 150   |                           | μs     |
| Θ <sub>m</sub>         | Phase Margin                       |                                                                     |      | 49    |                           | Deg    |
| t <sub>r</sub>         | Overload Recovery Time             |                                                                     |      | 110   |                           | μs     |
| NOISE PERFORMANCE      |                                    |                                                                     |      |       |                           |        |
| THD                    | Total Harmonic Distortion          | f=100Hz, 4V <sub>PP</sub> , R <sub>L</sub> =50kΩ,                   |      | 0.09  |                           | %      |
| e <sub>n</sub>         | Voltage Noise Density              | f=1kHz                                                              |      | 190   |                           | nV/√Hz |


Specifications subject to change without notice.

## Typical Performance Characteristics


### Supply Current vs. Supply Voltage

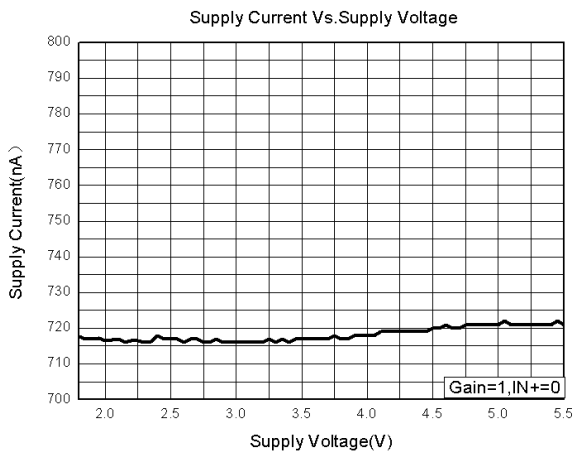


### Supply Current vs. Temperature

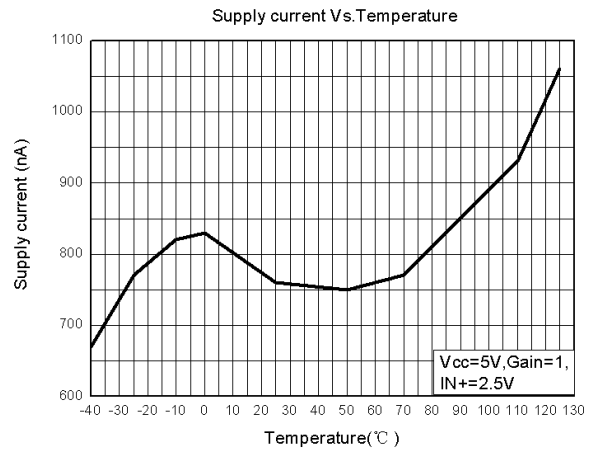


### ISOURCE vs. Output Voltage

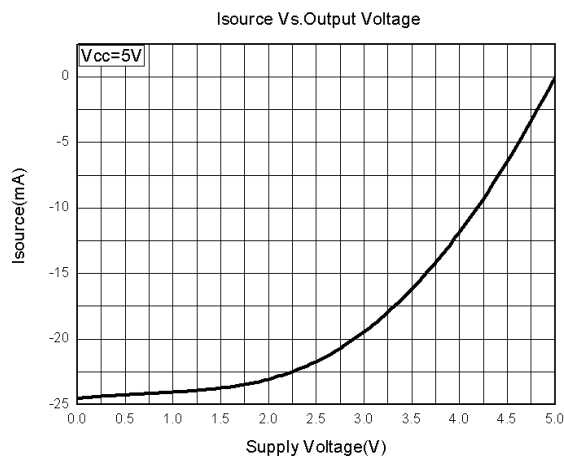


### ISINK vs. Output Voltage

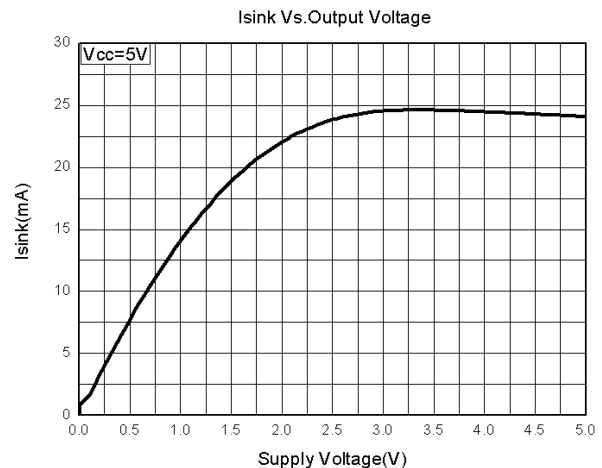


### Gain vs. Frequency

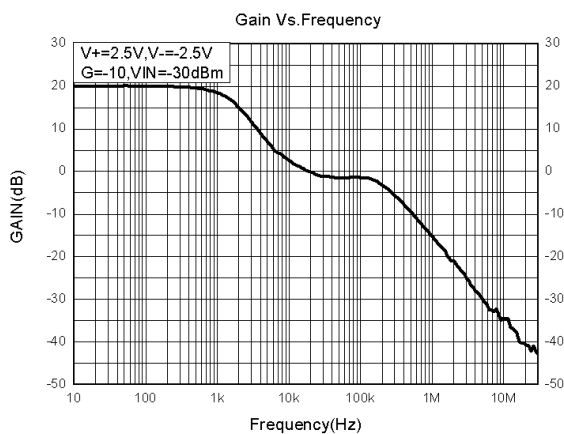


### Input Offset Voltage vs. Temperature

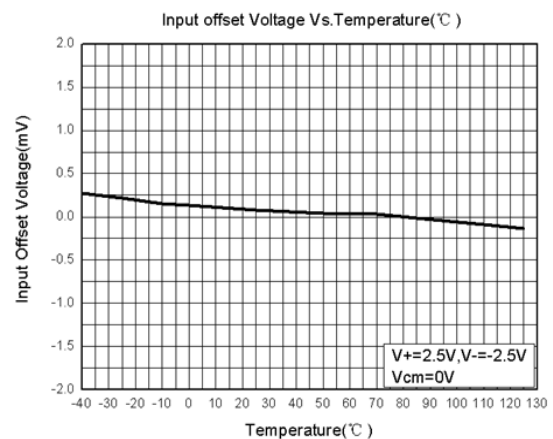




### Input Offset Voltage vs. Supply Voltage

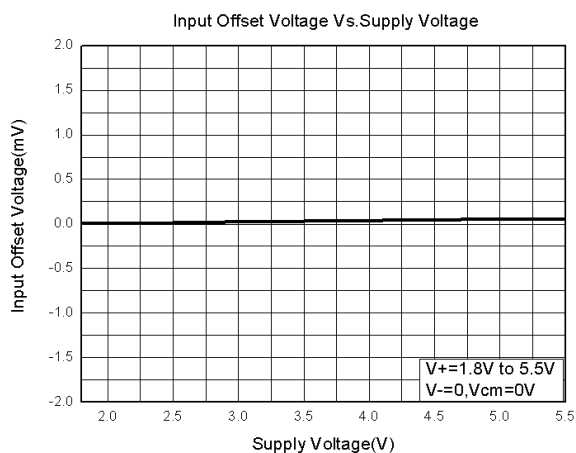

### Input Offset Voltage vs. Common Voltage




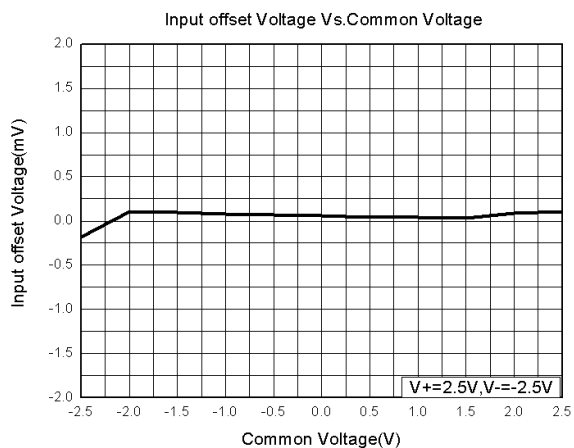


## Physical Dimensions: SOT23-5

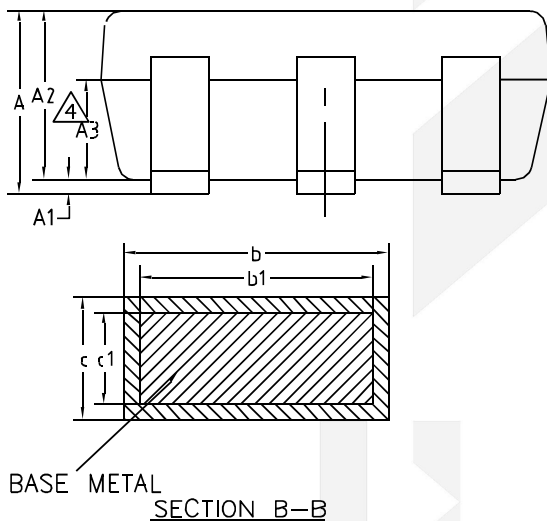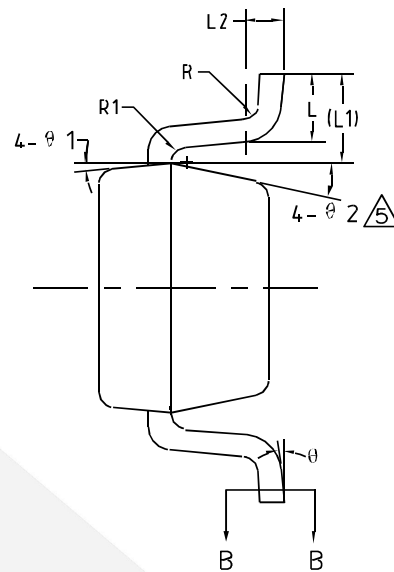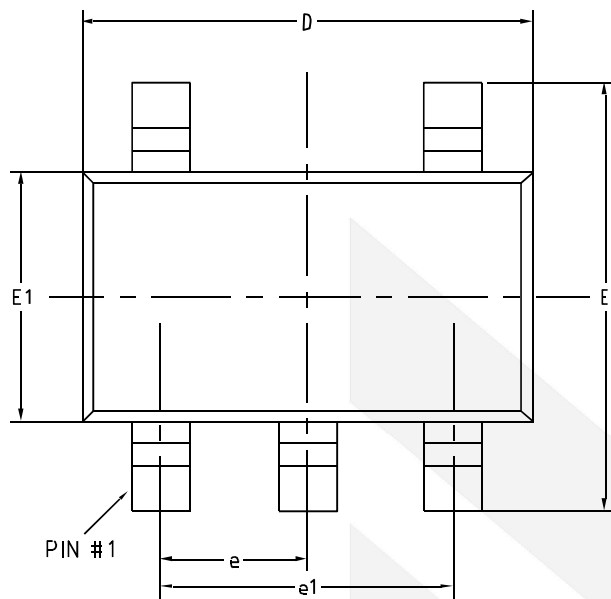

| COMMON DIMENSIONS<br>(UNITS OF MEASURE=MILLIMETER) |         |       |       |
|----------------------------------------------------|---------|-------|-------|
| Symbol                                             | MIN     | NOM   | MAX   |
| A                                                  | -       | -     | 1.25  |
| A1                                                 | 0       | -     | 0.15  |
| A2                                                 | 1.00    | 1.10  | 1.20  |
| A3                                                 | 0.60    | 0.65  | 0.70  |
| b                                                  | 0.36    | -     | 0.50  |
| b1                                                 | 0.36    | 0.38  | 0.45  |
| c                                                  | 0.14    | -     | 0.20  |
| c1                                                 | 0.14    | 0.15  | 0.16  |
| D                                                  | 2.826   | 2.926 | 3.026 |
| E                                                  | 2.60    | 2.80  | 3.00  |
| E1                                                 | 1.526   | 1.626 | 1.726 |
| e                                                  | 0.90    | 0.95  | 1.00  |
| e1                                                 | 1.80    | 1.90  | 2.00  |
| L                                                  | 0.35    | 0.45  | 0.60  |
| L1                                                 | 0.59REF |       |       |
| L2                                                 | 0.25BSC |       |       |
| R                                                  | 0.10    | -     | -     |
| R1                                                 | 0.10    | -     | 0.25  |
| θ                                                  | 0°      | -     | 8°    |
| θ1                                                 | 3°      | 5°    | 7°    |
| θ2                                                 | 6°      | -     | 14°   |





## Physical Dimensions: SOT23-6

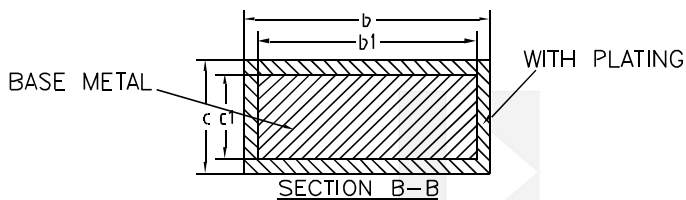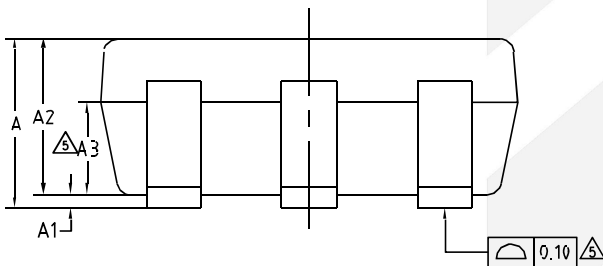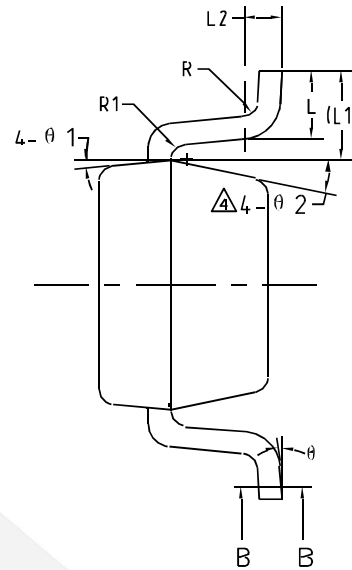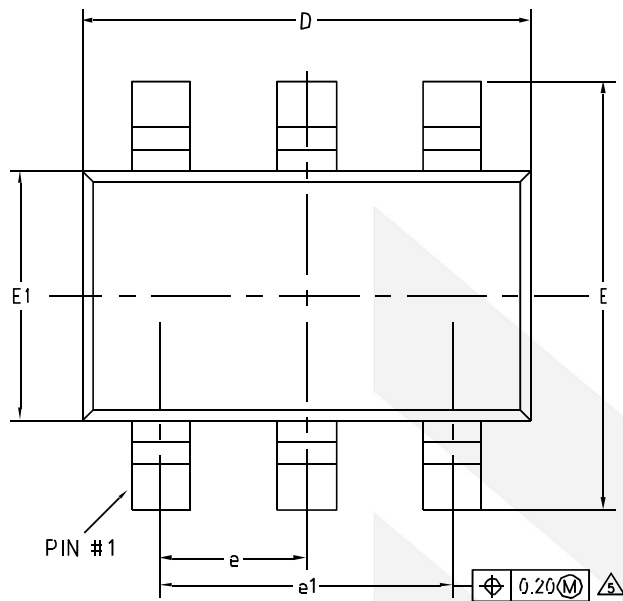

| COMMON DIMENSIONS<br>(UNITS OF MEASURE=MILLIMETER) |         |       |       |
|----------------------------------------------------|---------|-------|-------|
| Symbol                                             | MIN     | NOM   | MAX   |
| A                                                  | -       | -     | 1.25  |
| A1                                                 | 0       | -     | 0.15  |
| A2                                                 | 1.00    | 1.10  | 1.20  |
| A3                                                 | 0.60    | 0.65  | 0.70  |
| b                                                  | 0.36    | -     | 0.50  |
| b1                                                 | 0.36    | 0.38  | 0.45  |
| c                                                  | 0.14    | -     | 0.20  |
| c1                                                 | 0.14    | 0.15  | 0.16  |
| D                                                  | 2.826   | 2.926 | 3.026 |
| E                                                  | 2.60    | 2.80  | 3.00  |
| E1                                                 | 1.526   | 1.626 | 1.726 |
| e                                                  | 0.90    | 0.95  | 1.00  |
| e1                                                 | 1.80    | 1.90  | 2.00  |
| L                                                  | 0.35    | 0.45  | 0.60  |
| L1                                                 | 0.59REF |       |       |
| L2                                                 | 0.25BSC |       |       |
| R                                                  | 0.10    | -     | -     |
| R1                                                 | 0.10    | -     | 0.25  |
| θ                                                  | 0°      | -     | 8°    |
| θ1                                                 | 3°      | 5°    | 7°    |
| θ2                                                 | 6°      | -     | 14°   |

600mA, Rail-to-Rail Input/ Output Low Power Amplifier



# Physical Dimensions: SOIC-8

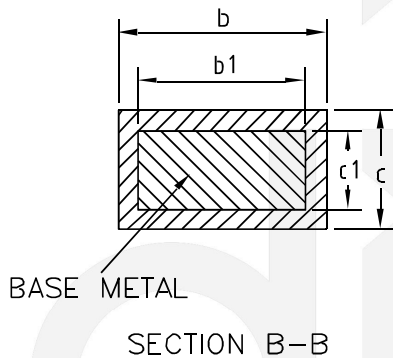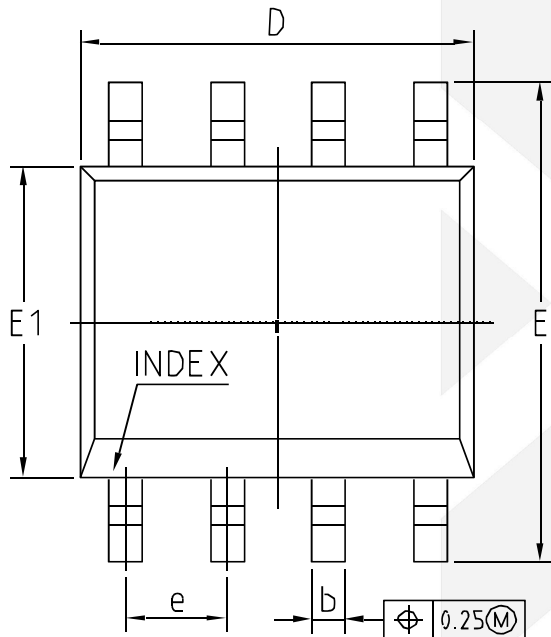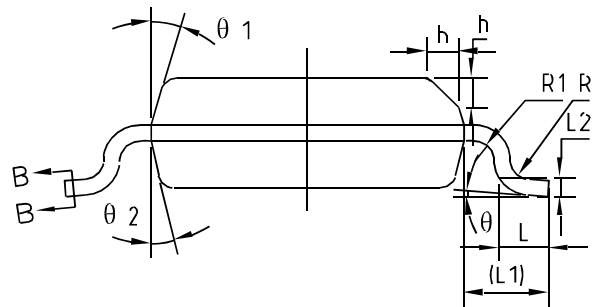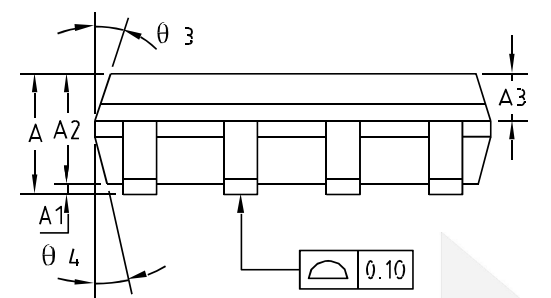

| COMMON DIMENSIONS<br>(UNITS OF MEASURE=MILLIMETER) |         |      |      |
|----------------------------------------------------|---------|------|------|
| Symbol                                             | MIN     | NOM  | MAX  |
| A                                                  | 1.35    | 1.55 | 1.75 |
| A1                                                 | 0.10    | 0.15 | 0.25 |
| A2                                                 | 1.25    | 1.40 | 1.65 |
| A3                                                 | 0.50    | 0.60 | 0.70 |
| b                                                  | 0.38    | -    | 0.51 |
| b1                                                 | 0.37    | 0.42 | 0.47 |
| c                                                  | 0.17    | -    | 0.25 |
| c1                                                 | 0.17    | 0.20 | 0.23 |
| D                                                  | 4.80    | 4.90 | 5.00 |
| E                                                  | 5.80    | 6.00 | 6.20 |
| E1                                                 | 3.80    | 3.90 | 4.00 |
| e                                                  | 1.27BSC |      |      |
| L                                                  | 0.45    | 0.60 | 0.80 |
| L1                                                 | 1.04REF |      |      |
| L2                                                 | 0.25BSC |      |      |
| R                                                  | 0.07    | -    | -    |
| R1                                                 | 0.07    | -    | -    |
| h                                                  | 0.30    | 0.40 | 0.50 |
| theta                                              | 0°      | -    | 8°   |
| theta 1                                            | 15°     | 17°  | 19°  |
| theta 2                                            | 11°     | 13°  | 15°  |
| theta 3                                            | 15°     | 17°  | 19°  |
| theta 4                                            | 11°     | 13°  | 15°  |

600nA, Rail-to-Rail Input/ Output Low Power Amplifier

## Physical Dimensions: MSOP-8

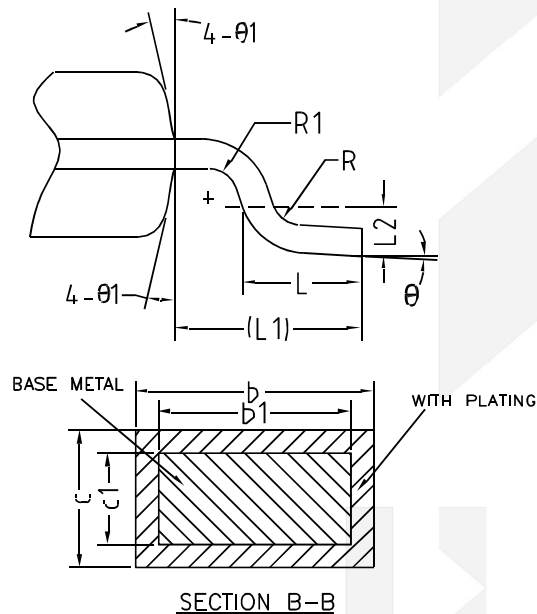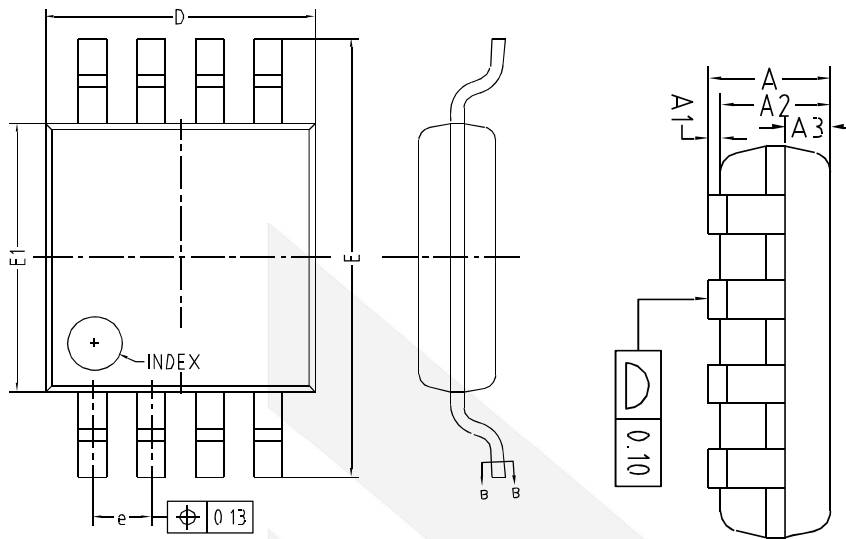


| COMMON DIMENSIONS<br>(UNITS OF MEASURE=MILLIMETER) |         |      |      |
|----------------------------------------------------|---------|------|------|
| Symbol                                             | MIN     | NOM  | MAX  |
| A                                                  | -       | -    | 1.10 |
| A1                                                 | 0       | -    | 0.15 |
| A2                                                 | 0.75    | 0.85 | 0.95 |
| A3                                                 | 0.25    | 0.35 | 0.39 |
| b                                                  | 0.28    | -    | 0.37 |
| b1                                                 | 0.27    | 0.30 | 0.33 |
| c                                                  | 0.15    | -    | 0.20 |
| c1                                                 | 0.14    | 0.15 | 0.16 |
| D                                                  | 2.90    | 3.00 | 3.10 |
| E                                                  | 4.70    | 4.90 | 5.10 |
| E1                                                 | 2.90    | 3.00 | 3.10 |
| e                                                  | 0.55    | 0.65 | 0.75 |
| L                                                  | 0.40    | 0.60 | 0.80 |
| L1                                                 | 0.95REF |      |      |
| L2                                                 | 0.25BSC |      |      |
| R                                                  | 0.07    | -    | -    |
| R1                                                 | 0.07    | -    | -    |
| θ                                                  | 0°      | -    | 8°   |
| θ1                                                 | 9°      | 12°  | 15°  |

600nA, Rail-to-Rail Input/ Output Low Power Amplifier



## Physical Dimensions: SOP-14

600nA, Rail-to-Rail Input/ Output Low Power Amplifier


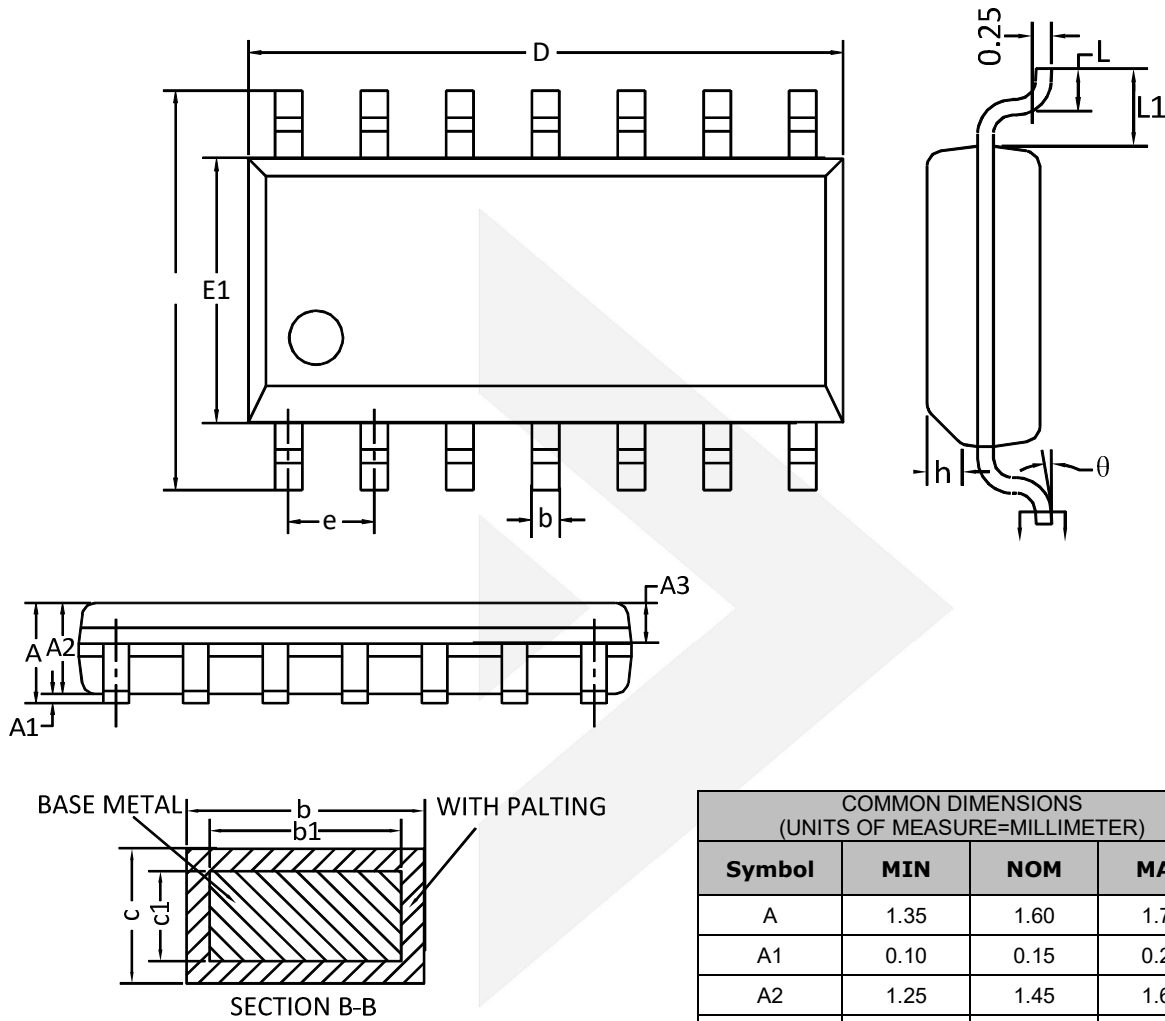


| COMMON DIMENSIONS<br>(UNITS OF MEASURE=MILLIMETER) |         |      |      |
|----------------------------------------------------|---------|------|------|
| Symbol                                             | MIN     | NOM  | MAX  |
| A                                                  | 1.35    | 1.60 | 1.75 |
| A1                                                 | 0.10    | 0.15 | 0.25 |
| A2                                                 | 1.25    | 1.45 | 1.65 |
| A3                                                 | 0.55    | 0.65 | 0.75 |
| b                                                  | 0.36    | -    | 0.49 |
| b1                                                 | 0.35    | 0.40 | 0.45 |
| c                                                  | 0.17    | -    | 0.25 |
| c1                                                 | 0.17    | 0.20 | 0.23 |
| D                                                  | 8.45    | 8.65 | 8.85 |
| E                                                  | 5.80    | 6.00 | 6.20 |
| E1                                                 | 3.70    | 3.90 | 4.10 |
| e                                                  | 1.27BSC |      |      |
| h                                                  | 0.25    | -    | 0.50 |
| L                                                  | 0.45    | 0.60 | 0.80 |
| L1                                                 | 1.05BSC |      |      |
| Θ                                                  | 0°      | -    | 8°   |

## Physical Dimensions: TSSOP-14

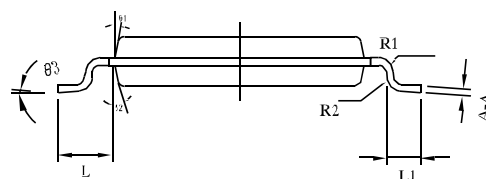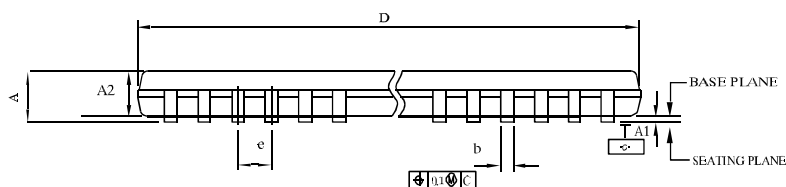

TOP VIEW

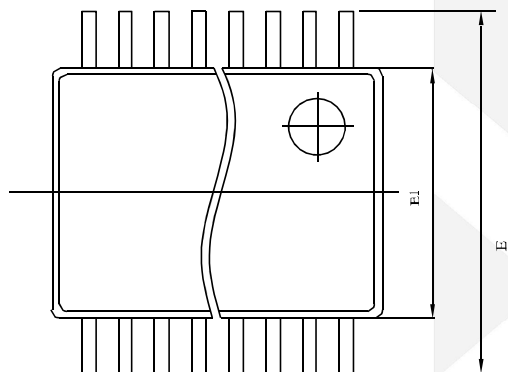

BOTTOM VIEW

| COMMON DIMENSIONS<br>(UNITS OF MEASURE=MILLIMETER) |         |      |
|----------------------------------------------------|---------|------|
| Symbol                                             | Min     | Max  |
| A                                                  |         | 1.2  |
| A1                                                 | 0.05    | 0.15 |
| A2                                                 | 0.8     | 1.05 |
| E                                                  | 6.25    | 6.55 |
| E1                                                 | 4.3     | 4.5  |
| D                                                  | 4.9     | 5.1  |
| L                                                  |         | 1    |
| L1                                                 | 0.45    | 0.75 |
| e                                                  | 0.65    |      |
| b                                                  | 0.19    | 0.3  |
| R1                                                 | 0.15TYP |      |
| R2                                                 | 0.15TYP |      |
| A-A                                                | 0.09    | 0.2  |
| θ1                                                 | 12° TYP |      |
| θ2                                                 | 12° TYP |      |
| θ3                                                 | 0°      | 8°   |

600nA, Rail-to-Rail Input/ Output Low Power Amplifier

## CONTACT US

**Dioo** is a professional design and sales corporation for high-quality and performance analog semiconductors. The company focuses on industry markets, such as, cell phone, handheld products, laptop, and medical equipment and so on. Dioo's product families include analog signal processing and amplifying, LED drivers and charger IC. Go to <http://www.dioo.com> for a complete list of Dioo product families.

For additional product information, or full datasheet, please contact with our Sales Department or Representatives.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)