

# SPECIFICATION CONTROL DRAWING

SCD Number

**44A0811**

TITLE WIRE, RADIATION-CROSSLINKED, POLYALKENE-INSULATED,  
MEDIUMWEIGHT, 600VOLT

Date 28-Mar-11

Revision P1

This specification sheet forms a part of the latest issue of Raychem Specification 44.

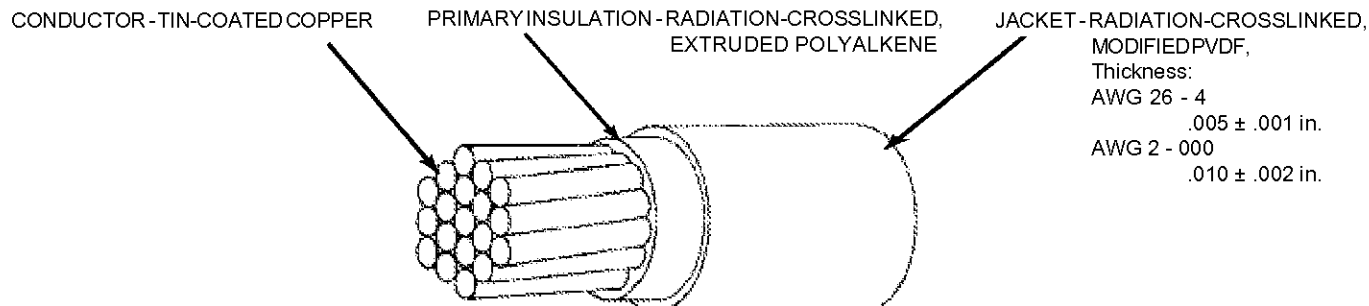


TABLE I. CONSTRUCTION DETAILS

| PART NUMBER<br>1/ | WIRE SIZE<br>(AWG) | CONDUCTOR STRANDING<br>(number x AWG) | DIAMETER OF STRANDED CONDUCTOR<br>(in.) |         | FINISHED WIRE                                |                   |                                  |
|-------------------|--------------------|---------------------------------------|-----------------------------------------|---------|----------------------------------------------|-------------------|----------------------------------|
|                   |                    |                                       | MINIMUM                                 | MAXIMUM | MAXIMUM RESISTANCE AT 20°C<br>(ohms/1000ft.) | DIAMETER<br>(in.) | MAXIMUM WEIGHT<br>(lbs/1000 ft.) |
| 44A0811-26-*      | 26                 | 19 x 38                               | .018                                    | .021    | 41.3                                         | .048 ± .002       | 1.9                              |
| 44A0811-24-*      | 24                 | 19 x 36                               | .023                                    | .026    | 26.2                                         | .054 ± .002       | 2.6                              |
| 44A0811-22-*      | 22                 | 19 x 34                               | .029                                    | .033    | 16.2                                         | .062 ± .003       | 3.8                              |
| 44A0811-20-*      | 20                 | 19 x 32                               | .037                                    | .041    | 9.88                                         | .070 ± .003       | 5.4                              |
| 44A0811-18-*      | 18                 | 19 x 30                               | .046                                    | .051    | 6.23                                         | .080 ± .003       | 8.0                              |
| 44A0811-16-*      | 16                 | 19 x 29                               | .052                                    | .058    | 4.81                                         | .089 ± .004       | 9.9                              |
| 44A0811-14-*      | 14                 | 19 x 27                               | .065                                    | .073    | 3.06                                         | .108 ± .004       | 14.9                             |
| 44A0811-12-*      | 12                 | 37 x 28                               | .084                                    | .090    | 2.02                                         | .126 ± .004       | 21.9                             |
| 44A0811-10-*      | 10                 | 37 x 26                               | .106                                    | .114    | 1.26                                         | .155 ± .005       | 35.0                             |
| 44A0811- 8-*      | 8                  | 133 x 29                              | .158                                    | .173    | .701                                         | .214 ± .006       | 62.8                             |
| 44A0811- 6-*      | 6                  | 133 x 27                              | .198                                    | .217    | .445                                         | .264 ± .007       | 99.3                             |
| 44A0811- 4-*      | 4                  | 133 x 25                              | .250                                    | .274    | .280                                         | .320 ± .008       | 153.                             |
| 44A0811- 2-*      | 2                  | 665 x 30                              | .320                                    | .340    | .183                                         | .400 ± .012       | 247.                             |
| 44A0811- 0-*      | 0                  | 1045 x 30                             | .405                                    | .425    | .116                                         | .490 ± .016       | 377.                             |
| 44A0811-00-*      | 00                 | 1330 x 30                             | .450                                    | .475    | .091                                         | .562 ± .016       | 498.                             |
| 44A0811-000-*     | 000                | 1665 x 30                             | .515                                    | .540    | .071                                         | .634 ± .020       | 588.                             |

TABLE II. PERFORMANCE DETAILS

| PART NUMBER<br>1/ | BEND TESTING                                      |              |      |                                                   |              |
|-------------------|---------------------------------------------------|--------------|------|---------------------------------------------------|--------------|
|                   | MANDREL DIAMETER<br>(inch) (± 3%)                 |              |      | WEIGHT<br>(lb) (± 3%)                             |              |
|                   | IMMERSION,<br>LIFE CYCLE AND<br>ACCELERATED AGING | COLD<br>BEND | WRAP | IMMERSION,<br>LIFE CYCLE AND<br>ACCELERATED AGING | COLD<br>BEND |
|                   |                                                   |              |      |                                                   |              |
| 44A0811-26-*      | .500                                              | 1.00         | .250 | 0.50                                              | 3.00         |
| 44A0811-24-*      | .500                                              | 1.00         | .250 | 0.50                                              | 3.00         |
| 44A0811-22-*      | .750                                              | 1.00         | .250 | 1.50                                              | 3.00         |
| 44A0811-20-*      | .750                                              | 1.00         | .250 | 2.00                                              | 4.00         |
| 44A0811-18-*      | 1.00                                              | 1.50         | .375 | 2.00                                              | 4.00         |
| 44A0811-16-*      | 1.00                                              | 1.50         | .375 | 2.00                                              | 5.00         |
| 44A0811-14-*      | 1.50                                              | 2.00         | .500 | 2.00                                              | 5.00         |
| 44A0811-12-*      | 2.00                                              | 2.00         | .500 | 2.00                                              | 5.00         |
| 44A0811-10-*      | 3.00                                              | 3.00         | .750 | 2.00                                              | 5.00         |
| 44A0811- 8-*      | 3.00                                              | 4.00         | .750 | 3.00                                              | 6.00         |
| 44A0811- 6-*      | 4.00                                              | 5.00         | 1.00 | 3.00                                              | 10.0         |
| 44A0811- 4-*      | 5.00                                              | 6.00         | 1.25 | 3.00                                              | 10.0         |
| 44A0811 - 2-*     | 6.00                                              | 8.00         | 3.00 | 4.00                                              | 15.0         |
| 44A0811- 0-*      | 8.00                                              | 10.0         | 4.00 | 4.00                                              | 15.0         |
| 44A0811-00-*      | 10.0                                              | 12.0         | 4.50 | 5.00                                              | 20.0         |
| 44A0811-000-*     | 18.0                                              | 18.0         | 6.00 | 6.00                                              | 20.0         |

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.

TE Connectivity also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-881. OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.



## WIRE RATINGS AND ADDITIONAL REQUIREMENTS

## TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

ACCELERATED AGING: 300 ± 2°C for 6 hours

Identification legibility, 225 ± 2°C for 6 hours

BLOCKING: 150 ± 2°C for 24 hours

COLOR: White preferred

FLAMMABILITY: 30 seconds (maximum); 3 inches (maximum); no flaming of facial tissue

HUMIDITY RESISTANCE: Insulation Resistance, 5000 megohms for 1000 ft (minimum)

IDENTIFICATION, STRIPING, OR BAND DURABILITY:

125 cycles (250 strokes) (minimum), 500 g weight

IMMERSION: Diameter increase 5% (maximum); no cracking, no dielectric breakdown

INSULATION ELONGATION AND TENSILE STRENGTH:

Primary Insulation,

Elongation, 150% (minimum)

Tensile Strength, 2500 lbf/in<sup>2</sup> (minimum), AWG 26-122000 lbf/in<sup>2</sup> (minimum), AWG 10 & larger

INSULATION FLAWS:

Primary Insulation,

Spark Test, 3.0 kV (rms) at 60 Hz

4.2 kV (rms) at 3 kHz

Impulse Dielectric Test, 6.0 kV (peak)

Finished Wire,

Spark Test, 5.7 kV (rms) at 3 kHz

Impulse Dielectric Test, 8.0 kV (peak)

INSULATION RESISTANCE: 5000 megohms for 1000 ft (minimum)

LIFE CYCLE: 200 ± 2°C for 168 hours

LOW TEMPERATURE COLD BEND: -65 ± 2°C for 4 hours

SHRINKAGE: 300 ± 2°C, 0.125 in. (maximum) in 12 inches, AWG 26-12

0.250 in. (maximum) in 12 inches, AWG 10 &amp; larger

SMOKE: 200 ± 2°C, no visible smoke.

SOLDERABILITY: 95% minimum coverage.

Per MIL-STD-202, Method 208, except without steam aging, Type RMA Flux (for 10 AWG &amp; smaller only)

SURFACE RESISTANCE: 500 megohms-in. (minimum), both readings

THERMAL SHOCK RESISTANCE: 150 ± 2°C, 0.060 in. (maximum)

VOLTAGE WITHSTAND (Post Environmental): 2500 volts (rms), 60 Hz, 5 minutes

WICKING: 2.25 in. (maximum)

PART NUMBER:

The "\*" in the part numbers on page 1 shall be replaced by color code designators.

1/ Example: AWG 18, white: 44A0811-18-9

AWG 14, white with a black stripe: 44A0811-14-90

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)