

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:


0672984090

Status:

Active

Description:

Universal Serial Bus (USB) Shielded I/O Receptacle, Right Angle, Dual Stacked, Type A, Gold (Au) Flash, White Housing, with 4 Beveled Metal Pins, Lead Free

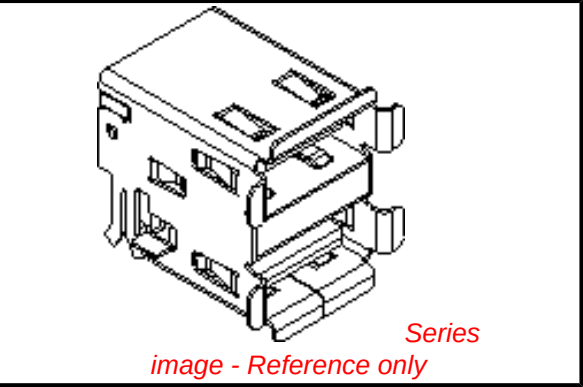

Documents:	
3D Model	Product Specification PS-67298-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

General	
Product Family	I/O Connectors
Series	67298
Application	Wire-to-Board
Comments	4 Beveled Metal Pins
Component Type	Receptacle
Product Name	USB
Type	A
Physical	
Boot Color	N/A
Circuits (Loaded)	8
Circuits (maximum)	8
Gender	Receptacle
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Number of Rows	2
Orientation	Right Angle
PC Tail Length (in)	0.110 In
PC Tail Length (mm)	2.80 mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Tray
Panel Mount	Yes
Pitch - Mating Interface (in)	0.079 In, 0.098 In
Pitch - Mating Interface (mm)	2.00 mm, 2.50 mm
Pitch - Term. Interface (in)	0.079 In, 0.098 In
Pitch - Term. Interface (mm)	2.00 mm, 2.50 mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	2
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	0°C to +50°C
Termination Interface: Style	Through Hole
Waterproof / Dustproof	No
Electrical	
Current - Maximum per Contact	1.5A
Shield Type	Full Shield
Shielded	Yes
Voltage - Maximum	30V DC
Material Info	

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

67298Series

Mates With

USB Type A Plug



Reference - Drawing Numbers

Product Specification
Sales Drawing

PS-67298-001
SD-67298-008

This document was generated on 03/31/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



NOTE :

1. MATERIAL :

HOUSING :POLYESTER(PBT),GLASS FIBER FILLED, UL94-V0,COLOR:SEE TABLE
 TERMINAL :PHOSPHOR BRONZE
 METAL SHELL :FRONT SHELL:SUS 304
 BACK SHELL:SPCC

2. PLATING :

TERMINAL :
 CONTACT AREA :SEE TABLE
 SOLDER TAIL :TIN(Sn) ALLOY,THICKNESS=75 MICROINCH MIN/19 MICROMETER MIN.
 UNDER PLATE :NICKEL(Ni),THICKNESS=50 MICROINCH MIN/127 MICROMETER MIN.
 METAL SHELL :TIN PLATING,THICKNESS=100 MICROINCH MIN/254 MICROMETER MIN.
 UNDER PLATE :NICKEL (Ni),THICKNESS=50 MICROINCH MIN/127 MICROMETER MIN.

3. RECOMMENDED PCB THICKNESS :1.60+/-0.05mm

4. PRODUCT SPECIFICATION:REFER TO PS-67298-001




5. TEST SUMMARY:REFER TO TS-67298-008

6. PACKAGING:REFER TO PK-67298-003


7. THE HOUSING MATERIAL IS NOT FOR IR REFLOW PROCESS OR SURFACE MOUNTING COMPATIBLE PROCESS.

8. LEAD FREE AND ROHS COMPLIANCE PRODUCT

9. WEEK CODE XXXXX

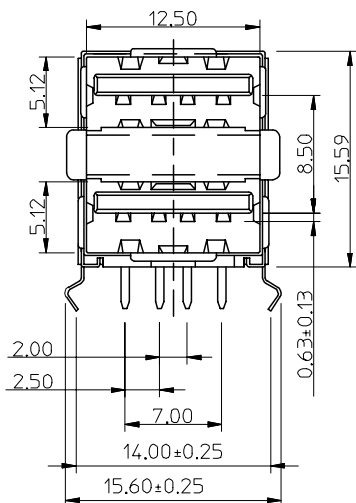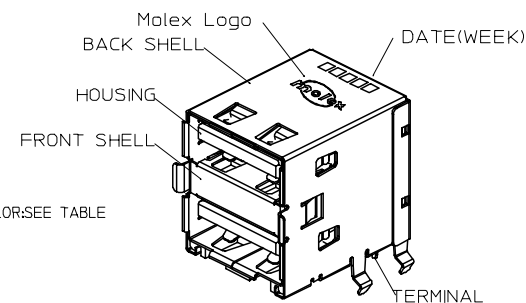

P/N	COLOR	CONTACT PLATING
67298-3090	BLACK	GOLD FLASH
67298-4090	WHITE	GOLD FLASH
67298-3091	BLACK	30 MICRO INCH
67298-4091	WHITE	30 MICRO CHEN

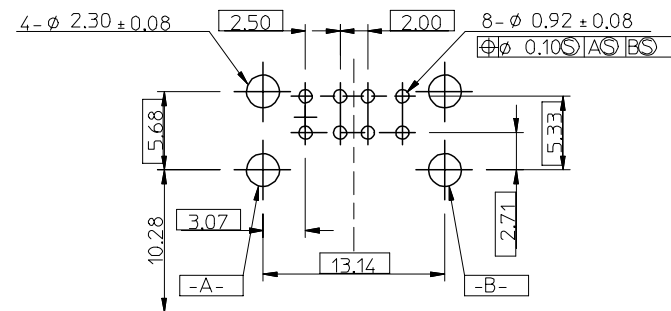

RECOMMENDED PCB LAYOUT

L/F FOR 67298		EC NO.: SH2005050297		2005/05/06		DRWN: JCHEN12		2005/05/10		CHKD:		2005/05/10		APPR: WWSCHANG		2005/05/10		REV			
		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)				DIMENSION STYLE MM ONLY				SCALE		DESIGN UNITS METRIC		 THIRD ANGLE PROJECTION					
		 =0				mm		INCH		DRAWN BY IVY-LIN		DATE 2005/03/11		TITLE USB DUAL STACKED A CONNECTOR (LEAD FREE VERSION)							
		 =0		4 PLACES		± ---		± ---		CHECKED BY ALL IN		DATE 2005/04/01									
				3 PLACES		± ---		± ---		APPROVED BY WWSCHANG		DATE 2005/04/01		molex MOLEX INCORPORATED							
				2 PLACES		± 0.25		± ---		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-67298-008								SHEET NO. 1 OF 1	
				1 PLACE		± 0.25		± ---		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS											
				ANGULAR		± 3 °															
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru