

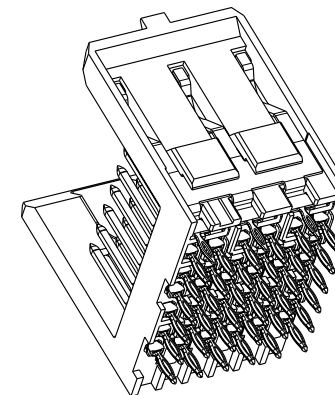
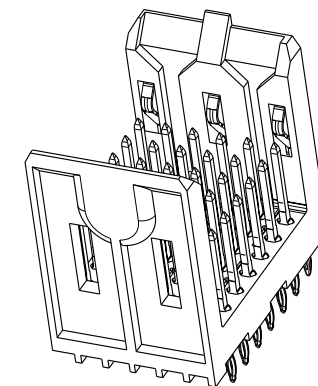


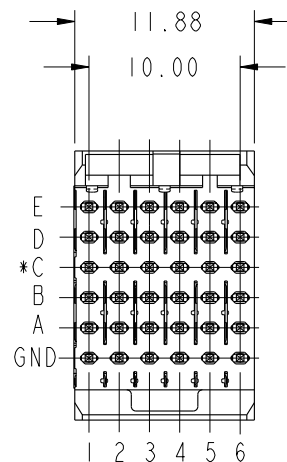


This document is the property of and embodies
CONFIDENTIAL and PROPRIETARY information of FCI.
No part of the information shown on this
document may be used in any way or disclosed
to others without the written consent of FCI.
Copyright FCI.

PRODUCT NUMBER	PLATING PERFORMANCE LEVEL	APPLICATION
59566-1YYY	TELCORDIA CO	STANDARD
59566-5YYY	TELCORDIA UE	
59566-1YYYYLF	TELCORDIA CO	LEAD FREE
59566-5YYYYLF	TELCORDIA UE	


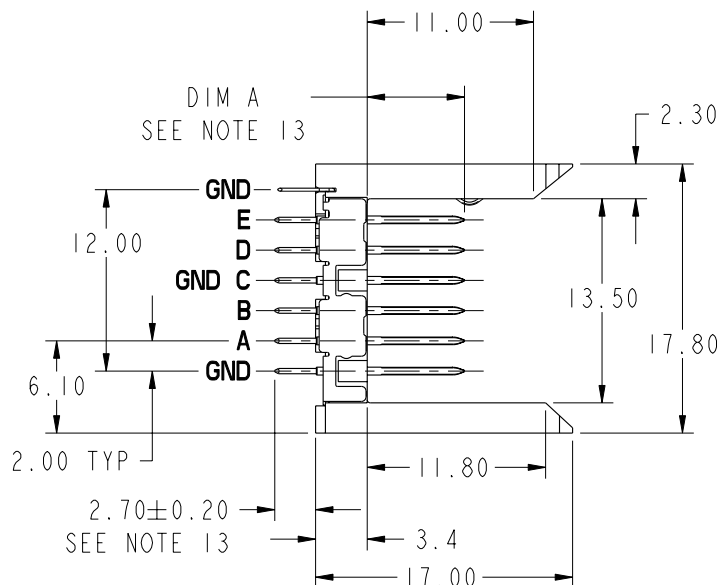


*** ROW C INFORMATION**
ODD NUMBER COLUMNS WITHIN ROW C ARE COMMONED
TO GROUND INTERNALLY WITHIN THE HOUSING. THE
EVEN NUMBER COLUMNS WITHIN ROW C ARE NOT.
FOR MAXIMUM PERFORMANCE IT IS RECOMMENDED THESE
EVEN COLUMNS BE COMMONED TO GROUND WITHIN THE PCB,
SEE NOTE 12

mat'l code SEE TABLE				tolerances unless otherwise specified		CUSTOMER		 www.fciconnect.com		
ltr	ecn no.	dr	date	linear	0.X ±0.3	projection		title VERTICAL SIGNAL HDR 5 ROW P.F. 30 POS. SELECT LOAD STD.		
H	V06-0061	DCH	2006-07-07		0.XX ±0.13					
J	V06-0868	DCH	2006-08-29		.XXX ±.051					
K	V07-0174	DCH	2007-04-13	angles	0° ±2°	 scale 1:1	A	product family METRAL 4000 code		
L	V07-0556	DCH	2007-08-22	dr	C. DAILY 2002-01-15			size	dwg no	213
M	V07-0696	HTB	2007-11-28	enrg	J. VOLSTROF 2001-10-31			59566 sheet 1 of 4		
-	-	-	-	chr	J. VOLSTROF 2002-01-15					
G	V06-0498	DCH	2006-05-23	appd	J. VOLSTROF 2002-01-15					
sheet index	revision sheet	M 1	M 2	M 3	M 4					



PRODUCT NUMBER
SEE SHEET 1

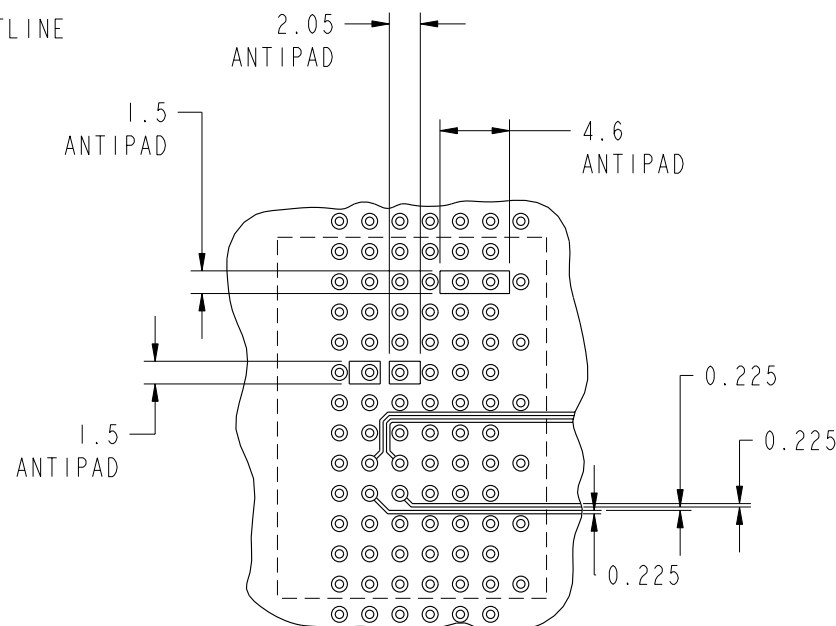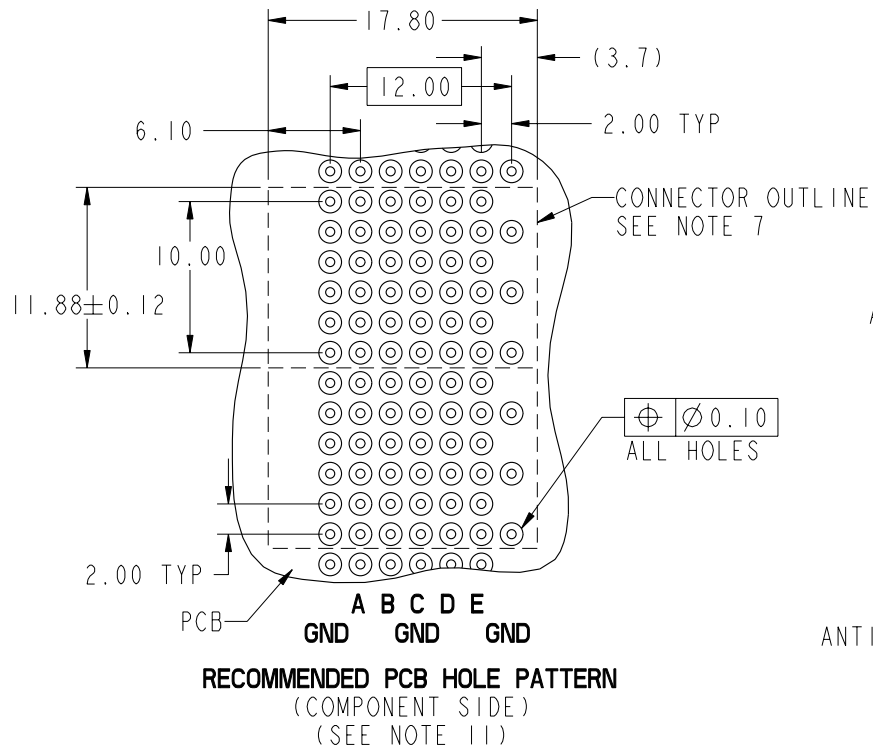

PRESS-FIT HOLES	OPTION 1	OPTION 2
HOLE DIAMETER AFTER PLATING	0.45-0.55	0.48-0.57
DRILLED HOLE	0.60±0.02	0.60±0.02
COPPER PLATING	0.025 MIN-0.050 MAX.	0.025 MIN-0.050 MAX.
SnPb PLATING	0.005-0.015	---

mat'l code SEE TABLE				tolerances unless otherwise specified		CUSTOMER		FCI	
ltr	ecr no.	dr	date	linear	0.X ±0.3	COPY		www.fciconnect.com	
M				linear	0.XX ±0.13	projection		title	
				angles	.XXX ±.051	0° ±2°		VERTICAL SIGNAL HDR 5 ROW	
				dr	C. DAILY 2002-01-15	MM		P.F. 30 POS. SELECT LOAD STD.	
				enrg	J. VOLSTROF 2001-10-31	scale		product family METRAL 4000	
				chr	J. VOLSTROF 2002-01-15	2:1		size	
				appd	J. VOLSTROF 2002-01-15			dwg no	
sheet index		revision sheet						code	
								213	
								sheet	
								2	

PRODUCT NUMBER

SEE SHEET 1

NOTES:

1. SEE APPLICATION SPECIFICATION GS-20-014 FOR INFORMATION ON AVAILABLE TOOLING, CIRCUIT BOARD DESIGN CONSIDERATIONS, REPAIR PROCEDURES AND PRODUCT OFFERINGS.
SEE PRODUCT SPECIFICATION GS-12-184.

2. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5, 1994

3. HOUSING MATERIAL: LIQUID CRYSTAL POLYMER, 30% GLASS FILLED, FLAME RETARDANT PER UL 94-V0.
PIN MATERIAL: PHOSPHOR BRONZE
GROUND SPRING MATERIAL: PHOSPHOR BRONZE
STRIPLINE SHIELD MATERIAL: PHOSPHOR BRONZE

4. PLATING INFORMATION: PLATING ON CONTACT AREA MEETS PERFORMANCE LEVELS SHOWN IN TABLE ON SHEET 1. PLATING ON "LF" TAILS IS Sn ONLY. ALL OTHERS ARE TIN-LEAD.

5. DIMENSIONAL RESTRICTIONS OF PINS IN HEADERS.
FOR USE WITH METRAL 4000 RECEPTACLES.

DIM A : 5.00mm MIN, 6.50mm MAX FOR ROWS A,B,D,E
DIM A : 5.00mm MIN, 8.00mm MAX FOR ROWS C
DIM A : 5.00mm MIN, 5.75mm MAX FOR ROWS GND
FOR USE WITH METRAL 1000 RECEPTACLES/
DIM A : 5.00mm MIN, 8.00mm MAX FOR ROWS A,B,C,D,E
DIM A : 5.00mm MIN, 5.75mm MAX FOR ROW GND

6. THE MIN PCB THICKNESS FOR FRONT PLUG-UP APPLICATIONS IS 1.6mm.

7. THE 'CONNECTOR OUTLINE' IS THE MIN OUTLINE REQUIRED. TO DETERMINE THE OUTLINE NECESSARY TO PERMIT THE VARIOUS TYPES OF REPAIR OPERATIONS, SEE APPLICATION SPECIFICATION GS-20-010.

8. CURRENT RATING : 1 AMP PER PIN

9. TEMPERATURE RANGE : -55°C TO +105°C

10. P/N 59566-XXXXLF

LEAD FREE (OPTIONAL)
SELECT LOAD PATTERN
PLATING CODE

11. AVOID TRACES ON TOP OF BOARD DUE TO EXPOSED GROUND SHIELD.

12. FOR FRONT PLUG-UP APPLICATIONS, THE EVEN NUMBERED PINS IN ROW "C" CAN BE USED FOR POWER AS WELL AS GROUND. IF THE SURROUNDING PINS ARE NOT USED FOR POWER, THEN EACH PIN CAN CARRY 3 AMPS. IF THE SURROUNDING PINS ARE USED FOR POWER, THEN EACH PIN CAN CARRY 1 AMP. WHEN THE SURROUNDING PINS ARE USED ONLY FOR LOW SPEED SIGNALS, THEN THE EVEN NUMBERED "C" ROW PINS CAN ALSO BE USED FOR LOW SPEED SIGNALS.


13. AFTER INSERTION INTO CIRCUIT BOARD WITH QUALIFIED TOOL.

14. THE PRODUCTS WHERE THE PART NUMBER ENDS IN LF MEET THE EUROPEAN DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.

15. FOR LEAD FREE PART NUMBERS, ADD AN "LF" SUFFIX.
EXAMPLE: 59566-X001LF

16. EQUIVALENT PRECIOUS METAL PLATINGS MAY BE SUBSTITUTED.

mat'l code SEE TABLE				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com			
ltr	ecn no.	dr	date		0.X ± 0.3	COPY					
M				linear	0.XX ± 0.13	projection		title VERTICAL SIGNAL HDR 5 ROW P.F. 30 POS. SELECT LOAD STD.			
					.XXX ± .051						
				angles	0° ± 2°						
				dr	C. DAILY 2002-01-15			product family		METRAL 4000	code
				enrg	J. VOLSTROF 2001-10-31			size		dwg no	213
				chr	J. VOLSTROF 2002-01-15			A		59566	
				appd	J. VOLSTROF 2002-01-15						
sheet	revision										
index	sheet										

Pro/E

3 |

cage code 22526

4

PDM: Rev:M

STATUS: Released

Printed: May 13, 2011



SELECT LOAD PATTERNS							
METRAL P/N	ROW	PIN CODE					
		1	2	3	4	5	6
59566-X001 SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	02
	D	02	02	02	02	02	02
	C	04	02	04	02	04	03
	B	02	02	02	02	02	02
	A	02	02	02	02	02	02
	GND	02	02	02	02	02	02
METRAL P/N	ROW	PIN CODE					
		1	2	3	4	5	6
59566-X002 SEE NOTE 15 LEAD FREE OPTION	E	03	03	03	03	03	03
	D	02	03	03	03	03	02
	C	04	04	04	04	04	04
	B	03	03	03	03	03	03
	A	03	03	03	03	03	03
	GND	02	02	02	02	02	02
METRAL P/N	ROW	PIN CODE					
		1	2	3	4	5	6
59566-X003 SEE NOTE 15 LEAD FREE OPTION	E	04	02	02	02	02	02
	D	04	02	02	02	02	02
	C	04	02	02	02	02	02
	B	04	02	02	02	02	02
	A	04	02	02	02	02	02
	GND	-	-	-	-	-	-
METRAL P/N	ROW	PIN CODE					
		1	2	3	4	5	6
59566-X004 SEE NOTE 15 LEAD FREE OPTION	E	04	02	02	02	02	02
	D	04	02	02	02	02	02
	C	04	02	02	02	02	02
	B	04	02	02	02	02	02
	A	04	02	02	02	02	02
	GND	02	02	02	02	02	02
METRAL P/N	ROW	PIN CODE					
		1	2	3	4	5	6
59566-X005 SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	02
	D	02	02	02	02	02	02
	C	02	02	02	02	02	02
	B	02	02	02	02	02	02
	A	02	02	02	02	02	02
	GND	-	02	02	02	02	-
METRAL P/N	ROW	PIN CODE					
		1	2	3	4	5	6
59566-X006 SEE NOTE 15 LEAD FREE OPTION	E	03	02	02	02	02	02
	D	03	02	02	02	02	02
	C	03	02	02	02	02	02
	B	03	02	02	02	02	02
	A	03	02	02	02	02	02
	GND	-	02	02	02	02	-

SELECT LOAD PATTERNS							
METRAL P/N	ROW	PIN CODE					
		1	2	3	4	5	6
59566-X007 SEE NOTE 15 LEAD FREE OPTION	E	02	02	02	02	02	02
	D	02	02	02	02	02	02
	C	04	02	02	02	02	02
	B	02	02	02	02	02	02
	A	02	02	02	02	02	02
	GND	-	02	02	02	02	-

PIN CODES	DIM A
01	5.00
02	5.75
03	6.50
04	7.25
*19	8.00

* CURRENTLY NOT AVAILABLE

mat'l code SEE TABLE				tolerances unless otherwise specified		CUSTOMER		 www.fciconnect.com				
ltr	ecn no.	dr	date	linear	0.X ±0.3		COPY		 title VERTICAL SIGNAL HDR 5 ROW P.F. 30 POS. SELECT LOAD STD.			
M					0.XX ±0.13		projection					
					.XXX ±.051							
				angles	0° ±2°							
		dr	C. DAILY	2002-01-15	 MM		product family		METRAL 4000		code	
		enrg	J. VOLSTROF	2001-10-31			size		dwg no		213	
		chr	J. VOLSTROF	2002-01-15	scale		1 : 1		A		sheet	
		appd	J. VOLSTROF	2002-01-15							59566	
sheet index	revision sheet											

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru