


**DESCRIPTION**

These high power 50 W Zener diodes represented by the JEDEC registered 1N2804 thru 1N2846B and 1N4557 thru 1N4564B series provide voltage regulation in a selection over a 3.9 V to 200 V broad range of voltages. They may be operated up to 50 W with adequate mounting and heat sinking with their low thermal resistance. These Zeners are also available in JAN, JANTX, JANTXV military qualifications. Microsemi also offers numerous other Zener products to meet higher and lower power applications.

**IMPORTANT:** For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

**APPEARANCE**

**FEATURES**

- JEDEC registered 1N2804 thru 1N2846B and 1N4557 thru 1N4564B
- Internal solder bond construction
- Hermetically sealed (welded)
- Zener Voltage 3.9V to 200V.
- Also available in JAN, JANTX, and JANTXV qualifications per MIL-PRF-19500/114 by adding the JAN, JANTX, or JANTXV prefixes to part numbers for desired level of screening; (e.g. JANTX1N2804B, etc.
- Standard polarity is anode to case
- Reverse polarity with cathode to case by designating R suffix in part number, e.g. 1N2804RB, etc.
- Consult factory for surface mount equivalents

**APPLICATIONS / BENEFITS**

- Regulates voltage over a broad operating current and temperature range
- Standard voltage tolerances are +/- 5% with B suffix, +/-10% with an A suffix, and +/-20% with no suffix
- Consult factory for +/-2% or +/-1% with a C or D suffix respectively
- Reverse polarity available
- Nonsensitive to ESD per MIL-STD-750 Method 1020
- Inherently radiation hard as described in Microsemi MicroNote 050

**MAXIMUM RATINGS**

- Junction Temperatures: -65°C to +175°C
- Storage Temperatures: -65°C to +200°C
- DC Power Dissipation: 50 watts at  $T_C \leq 75^\circ\text{C}$
- Power Derating: 0.5W/°C above 75°C
- Forward Voltage @ 10 A: 1.5 Volts
- THERMAL RESISTANCE: 2.0 °C/W maximum junction to base (1.5 °C/W typical)
- Solder temperatures: 260 °C for 10 s (max)

**MECHANICAL AND PACKAGING**

- CASE: Industry Standard TO-3 (TO-204AD), hermetically sealed, 0.052 inch diameter pins.
- FINISH: All external surfaces are corrosion resistant and terminal solderable.
- POLARITY: Standard Polarity units are connected anode to case. Reverse polarity (cathode to case) is indicated by Suffix R in part number
- WEIGHT: 15 grams.
- MOUNTING HARDWARE: Consult factory for optional insulator and sheet metal screws
- See package dimensions on last page

**\*ELECTRICAL CHARACTERISTICS @ 25°C**

| JEDEC<br>TYPE NO.<br>(Note 1) | NOMINAL<br>ZENER<br>VOLTAGE<br>$V_Z @ I_{ZT}$<br>(Note 2)<br>Volts | ZENER<br>TEST<br>CURRENT<br>( $I_{ZT}$ )<br>mA | MAX. ZENER<br>IMPEDANCE<br>(Note 3) |                                | MAX. DC ZENER<br>CURRENT<br>( $I_{ZM}$ @ 75°C<br>Case Temp.<br>(Note 4)<br>mA | TYPICAL<br>ZENER<br>VOLTAGE<br>Temp. Coeff.<br>$\alpha_{VZ}$<br>%/°C | MAXIMUM LEAKAGE<br>CURRENT**<br>$I_R @ V_R$ |       |
|-------------------------------|--------------------------------------------------------------------|------------------------------------------------|-------------------------------------|--------------------------------|-------------------------------------------------------------------------------|----------------------------------------------------------------------|---------------------------------------------|-------|
|                               |                                                                    |                                                | $Z_{ZT} @ I_{ZT}$                   | $Z_{ZK} @$<br>5mA ( $I_{ZK}$ ) |                                                                               |                                                                      | $\mu A$                                     | V     |
|                               |                                                                    |                                                | OHMS                                | OHMS                           |                                                                               |                                                                      |                                             |       |
| †1N4557B                      | 3.9                                                                | 3200                                           | 0.16                                | 400                            | 11,900                                                                        | -0.046                                                               | 150                                         | 0.5   |
| †1N4558B                      | 4.3                                                                | 2900                                           | 0.16                                | 500                            | 10,650                                                                        | -0.033                                                               | 150                                         | 0.5   |
| †1N4559B                      | 4.7                                                                | 2650                                           | 0.12                                | 600                            | 9,700                                                                         | -0.015                                                               | 100                                         | 1     |
| †1N4560B                      | 5.1                                                                | 2450                                           | 0.12                                | 650                            | 8,900                                                                         | +/-0.010                                                             | 20                                          | 1     |
| †1N4561B                      | 5.6                                                                | 2250                                           | 0.12                                | 900                            | 8,100                                                                         | +0.03                                                                | 20                                          | 1     |
| †1N4562B                      | 6.2                                                                | 2000                                           | 0.14                                | 1000                           | 7,300                                                                         | +0.049                                                               | 20                                          | 2     |
| 1N4563B                       | 6.8                                                                | 1850                                           | 0.16                                | 200                            | 6,650                                                                         | +0.053                                                               | 10                                          | 2     |
| 1N4564B                       | 7.5                                                                | 1650                                           | 0.24                                | 100                            | 6,050                                                                         | +0.057                                                               | 10                                          | 3     |
| †1N2804B                      | 6.8                                                                | 1850                                           | 0.2                                 | 70                             | 7,400                                                                         | .040                                                                 | 150                                         | 4.5   |
| †1N2805B                      | 7.5                                                                | 1700                                           | 0.3                                 | 70                             | 6,600                                                                         | .045                                                                 | 100                                         | 5     |
| †1N2806B                      | 8.2                                                                | 1500                                           | 0.4                                 | 70                             | 5,800                                                                         | .048                                                                 | 50                                          | 5.4   |
| †1N2807B                      | 9.1                                                                | 1370                                           | 0.5                                 | 70                             | 5,300                                                                         | .050                                                                 | 25                                          | 6.1   |
| †1N2808B                      | 10                                                                 | 1200                                           | 0.6                                 | 80                             | 4,800                                                                         | .055                                                                 | 25                                          | 6.7   |
| †1N2809B                      | 11                                                                 | 1100                                           | 0.8                                 | 80                             | 4,300                                                                         | .060                                                                 | 10                                          | 8.4   |
| †1N2810B                      | 12                                                                 | 1000                                           | 1.0                                 | 80                             | 4,000                                                                         | .065                                                                 | 10                                          | 9.1   |
| †1N2811B                      | 13                                                                 | 960                                            | 1.1                                 | 80                             | 3,700                                                                         | .065                                                                 | 10                                          | 9.9   |
| 1N2812B                       | 14                                                                 | 890                                            | 1.2                                 | 80                             | 3,400                                                                         | .070                                                                 | 10                                          | 10.6  |
| †1N2813B                      | 15                                                                 | 830                                            | 1.4                                 | 80                             | 3,100                                                                         | .070                                                                 | 10                                          | 11.4  |
| †1N2814B                      | 16                                                                 | 780                                            | 1.6                                 | 80                             | 2,950                                                                         | .070                                                                 | 10                                          | 12.2  |
| 1N2815B                       | 17                                                                 | 740                                            | 1.8                                 | 80                             | 2,750                                                                         | .075                                                                 | 10                                          | 13.0  |
| †1N2816B                      | 18                                                                 | 700                                            | 2.0                                 | 80                             | 2,550                                                                         | .075                                                                 | 10                                          | 13.7  |
| 1N2817B                       | 19                                                                 | 660                                            | 2.2                                 | 80                             | 2,450                                                                         | .075                                                                 | 10                                          | 14.4  |
| †1N2818B                      | 20                                                                 | 630                                            | 2.4                                 | 80                             | 2,350                                                                         | .075                                                                 | 10                                          | 15.2  |
| †1N2819B                      | 22                                                                 | 570                                            | 2.5                                 | 80                             | 2,100                                                                         | .080                                                                 | 10                                          | 16.7  |
| †1N2820B                      | 24                                                                 | 520                                            | 2.6                                 | 80                             | 1,950                                                                         | .080                                                                 | 10                                          | 18.2  |
| 1N2821B                       | 25                                                                 | 500                                            | 2.7                                 | 90                             | 1,850                                                                         | .080                                                                 | 10                                          | 19    |
| †1N2822B                      | 27                                                                 | 460                                            | 2.8                                 | 90                             | 1,650                                                                         | .085                                                                 | 10                                          | 20.6  |
| †1N2823B                      | 30                                                                 | 420                                            | 3.0                                 | 90                             | 1,550                                                                         | .085                                                                 | 10                                          | 22.8  |
| †1N2824B                      | 33                                                                 | 380                                            | 3.2                                 | 90                             | 1,450                                                                         | .085                                                                 | 10                                          | 25.1  |
| †1N2825B                      | 36                                                                 | 350                                            | 3.5                                 | 90                             | 1,300                                                                         | .085                                                                 | 10                                          | 27.4  |
| †1N2826B                      | 39                                                                 | 320                                            | 4.0                                 | 90                             | 1,175                                                                         | .090                                                                 | 10                                          | 29.7  |
| †1N2827B                      | 43                                                                 | 290                                            | 4.5                                 | 90                             | 1,075                                                                         | .090                                                                 | 10                                          | 32.7  |
| 1N2828B                       | 45                                                                 | 280                                            | 4.5                                 | 100                            | 1,030                                                                         | .090                                                                 | 10                                          | 34.2  |
| †1N2829B                      | 47                                                                 | 270                                            | 5.0                                 | 100                            | 980                                                                           | .090                                                                 | 10                                          | 35.8  |
| 1N2830B                       | 50                                                                 | 250                                            | 5.0                                 | 100                            | 935                                                                           | .090                                                                 | 10                                          | 38    |
| †1N2831B                      | 51                                                                 | 245                                            | 5.2                                 | 100                            | 925                                                                           | .090                                                                 | 10                                          | 38.8  |
| †1N2832B                      | 56                                                                 | 220                                            | 6                                   | 110                            | 825                                                                           | .090                                                                 | 10                                          | 42.6  |
| †1N2833B                      | 62                                                                 | 200                                            | 7                                   | 120                            | 735                                                                           | .090                                                                 | 10                                          | 47.1  |
| †1N2834B                      | 68                                                                 | 180                                            | 8                                   | 140                            | 670                                                                           | .090                                                                 | 10                                          | 51.7  |
| †1N2835B                      | 75                                                                 | 170                                            | 9                                   | 150                            | 600                                                                           | .090                                                                 | 10                                          | 56    |
| †1N2836B                      | 82                                                                 | 150                                            | 11                                  | 160                            | 550                                                                           | .090                                                                 | 10                                          | 62.2  |
| †1N2837B                      | 91                                                                 | 140                                            | 15                                  | 180                            | 470                                                                           | .090                                                                 | 10                                          | 69.2  |
| †1N2838B                      | 100                                                                | 120                                            | 20                                  | 200                            | 450                                                                           | .090                                                                 | 10                                          | 76    |
| 1N2839B                       | 105                                                                | 120                                            | 25                                  | 210                            | 430                                                                           | .095                                                                 | 10                                          | 79.8  |
| †1N2840B                      | 110                                                                | 110                                            | 30                                  | 220                            | 410                                                                           | .095                                                                 | 10                                          | 83.6  |
| †1N2841B                      | 120                                                                | 100                                            | 40                                  | 240                            | 375                                                                           | .095                                                                 | 10                                          | 91.2  |
| †1N2842B                      | 130                                                                | 95                                             | 50                                  | 275                            | 345                                                                           | .095                                                                 | 10                                          | 98.8  |
| †1N2843B                      | 150                                                                | 85                                             | 75                                  | 400                            | 300                                                                           | .095                                                                 | 10                                          | 114.0 |
| †1N2844B                      | 160                                                                | 80                                             | 80                                  | 450                            | 285                                                                           | .095                                                                 | 10                                          | 121.6 |
| †1N2845B                      | 180                                                                | 68                                             | 90                                  | 525                            | 250                                                                           | .095                                                                 | 10                                          | 136.8 |
| †1N2846B                      | 200                                                                | 65                                             | 100                                 | 600                            | 220                                                                           | .100                                                                 | 10                                          | 152.0 |

\*JEDEC Registered Data. \*\*Not JEDEC Data.


†Have JAN, JANTX and JANTXV Qualifications to MIL-S-19500/114.

See further notes on following page

**NOTES:**




1. The JEDEC type numbers shown (B suffix) have a +/- 5% tolerance on nominal zener voltage. The suffix A is used to identify +/-10% tolerance; no suffix indicates +/-20% tolerance. If tighter tolerance is required, consult factory. Standard polarity units have the anode connected to the case. Reverse polarity (cathode-to-case) units are available and are indicated by suffix R in the part number.
2. Zener Voltage ( $V_Z$ ) is measured with junction in thermal equilibrium with 30°C base temperature. The test currents ( $I_{ZT}$ ) have been selected so that at nominal voltages the dissipation is a constant 12.5 watts. This results in a nominal junction temperature rise of 18.75°C.
3. The zener impedance is derived from the 60 cycle ac voltage, which results when an ac current having an rms value equal to 10% of the dc zener current ( $I_{ZT}$  or  $I_{ZK}$ ) is superimposed on  $I_{ZT}$  or  $I_{ZK}$ . Zener impedance is measured at 2 points to ensure a sharp knee on the breakdown curve and to eliminate unstable units. A curve showing the variation of zener impedance vs. zener current for six representative types is shown in Figure 3. Also see MicroNote 202 for further information.
4. The values of  $I_{ZM}$  are calculated for a +/-5% tolerance on nominal zener voltage. Allowance has been made for the rise in zener voltage above  $V_{ZT}$  that results from zener impedance and the increase in junction temperature as power dissipation approaches 50 watts. In the case of individual diodes,  $I_{ZM}$  is that value of current that results in a dissipation of 50 watts.

**GRAPHS AND CIRCUITS**

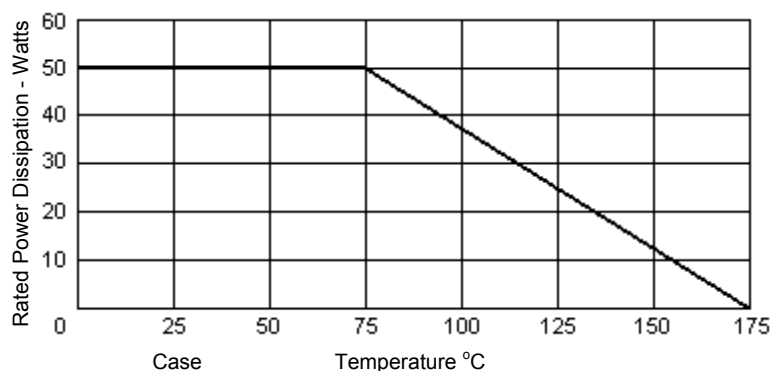


**FIGURE 2**  
**POWER DERATING CURVE**

Typical circuit connections for anode-to-case and cathode-to-case polarities (standard and reverse polarities, respectively).

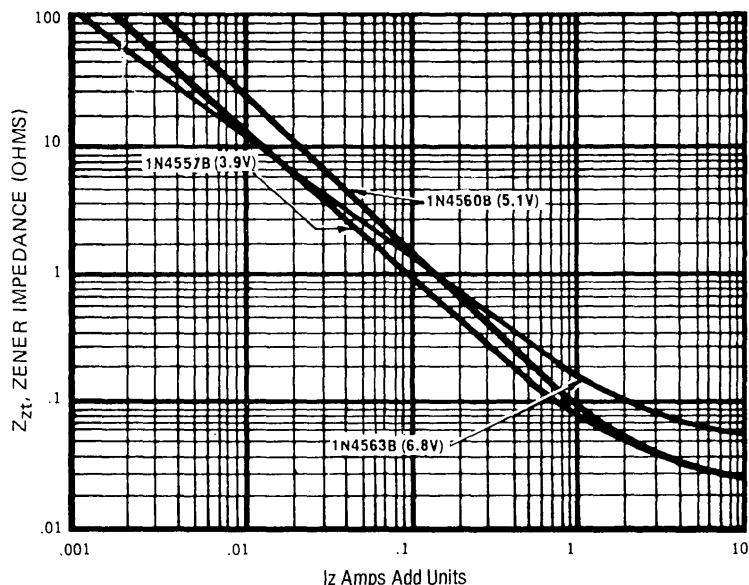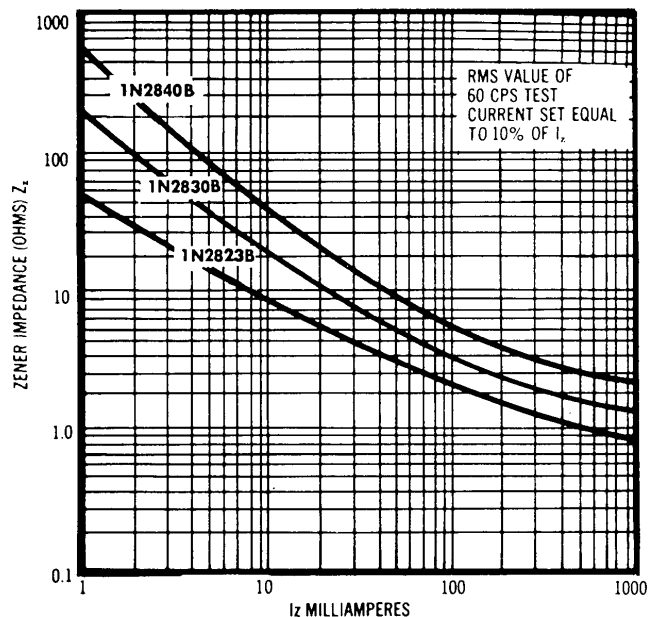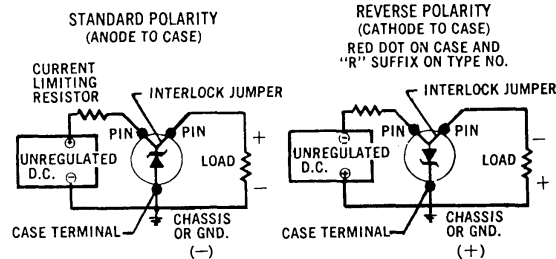

**FIGURE GROUP 3**  
**TYPICAL ZENER IMPEDANCE vs. ZENER CURRENT FOR TYPES SHOWN**

**PACKAGE DIMENSIONS**

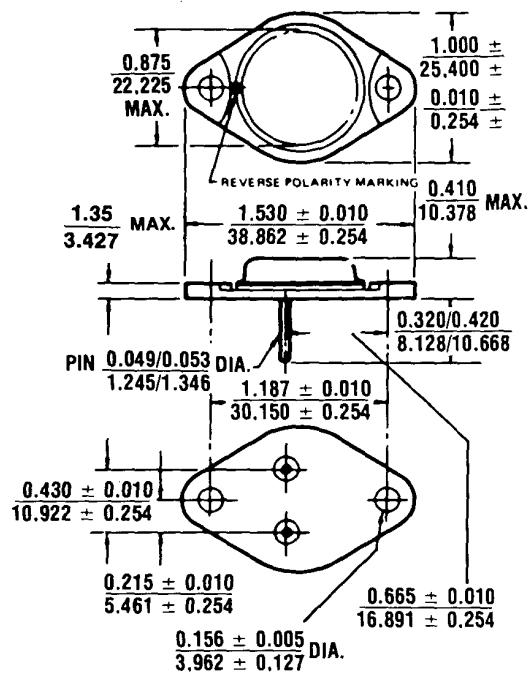

All dimensions in  $\frac{\text{INCH}}{\text{m.m.}}$

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)