



RF/Microwave cable assemblies, with a range of connectors, are available from Molex, using our Temp-Flex low loss and ultra low loss cables with outer jacket diameters of .056", .101" and .158".

Molex's RF/Microwave cable assemblies include high performance flexible coaxial cable from our Temp-Flex operation. A wide range of connectors are utilized to provide assemblies for many different markets and applications.

The cable comes standard with silver plated conductors, FEP Dielectric, double shields and FEP jacket. The standard, Low Loss cables use solid, proprietary low loss FEP dielectric with 70% Velocity of Propagation. The Ultra Low Loss cables use a unique air core design with up to 87% Velocity of Propagation. The diameter over the shield is comparable to standard semi-rigid sizes making these cables an ideal flexible alternative.

Connector options include SMA, 2.92mm, SMP, SMPM and many others.

For more information, visit us at www.molex.com.

Features and Benefits

Shielding Effectiveness 100 dB or better	Flexible alternative to semi-rigid coaxial assemblies
FEP Insulation and Jacket	Wide Operating Temperature Range
Low loss, solid core cable fits standard semi-rigid connectors	Wide range of connector styles for standard assemblies

Connector Availability Matrix

	Low Loss			Ultra Low Loss (assemblies)		
	047SC-2901	086SC-2401	141SC-1901	047-2801	086-2201	141-1701
SMPM Jack Straight	X	X		X	X	
SMPM Jack Right Angle	X	X		X	X	
SMP Jack Straight	X	X	X	X	X	X
SMP Jack Right Angle	X	X	X	X	X	X
SMA Plug Straight	X	X	X	X	X	X
SMA Plug Right Angle	X	X	X	X	X	X
SMA Jack Straight	X	X	X	X	X	X
2.92mm Plug Straight	X	X	X	X	X	X
2.4mm Plug Straight	X	X		X	X	
Type N Plug Straight		X	X		X	X
TNC Jack Straight	X	X				

Temp-Flex Cable Performance Characteristics

Cable P/N	Impedance (Ohms)	VOP	Capacitance	Min Static Bend Radius	Center Conductor	Insulation	Jacket	OD	Cut Off Freq.
047SC-2901	50±1	70%	29 pF/ft	0.20"	0.0113"	FEP	FEP	.056"	112 GHz
086SC-2401	50±1	70%	29 pF/ft	0.30"	0.0201"	FEP	FEP	.101"	62 GHz
141SC-1901	50±1	70%	29 pF/ft	0.50"	0.036"	FEP	FEP	.157"	41 GHz
047-2801	50±1	87%	23.3 pF/ft	0.20"	0.0126"	FEP	FEP	.055"	143 GHz
086-2201	50±1	86.4%	23.6 pF/ft	0.38"	0.0253"	FEP	FEP	.101"	72 GHz
141-1701	50±1	87%	23.3 pF/ft	0.75"	0.0453"	FEP	FEP	.158"	42 GHz

RF/Microwave Cable Assemblies

89762 Cable Assemblies with Temp-Flex Low Loss & Ultra Low Loss Cable






Ultra Low Loss (Monofilament) Assemblies


2.92mm Plug to Plug, 086 Ultra Low Loss cable assemblies

Part Number	Length (inches)	Insertion Loss	VSWR
89762-1320	6.0	0.8 dB	1.40 max to 40 GHz
89762-1321	9.0	1.2 dB	1.40 max to 40 GHz
89762-1322	12.0	1.6 dB	1.40 max to 40 GHz
89762-1323	15.0	2.0 dB	1.40 max to 40 GHz
89762-1324	18.0	2.4 dB	1.40 max to 40 GHz
89762-1325	120.0	16.0 dB	1.40 max to 40 GHz




SMA Plug to SMA Plug, 141 Ultra Low Loss cable assemblies

Part Number	Length	Insertion Loss	VSWR
89762-1370	6.0	0.35 dB	1.35 max to 26 GHz
89762-1371	12.0	0.70 dB	1.35 max to 26 GHz
89762-1372	120.0	7.00 dB	1.35 max to 26 GHz

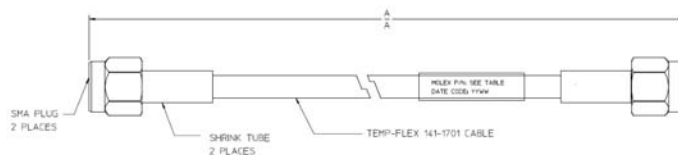


SMA Plug to SMP Jack, 086 Ultra Low Loss cable assemblies

Part Number	Length	Insertion Loss	VSWR
89762-1400	6.0	0.70 dB	1.50 max to 26 GHz
89762-1401	9.0	1.05 dB	1.50 max to 26 GHz
89762-1402	12.0	1.40 dB	1.50 max to 26 GHz
89762-1403	120.0	14.0 dB	1.50 max to 26 GHz

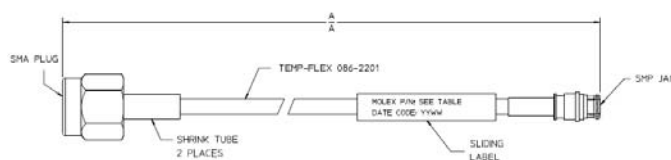


SMP Jack to SMP Jack, 086 Ultra Low Loss cable assemblies

Part Number	Length	Insertion Loss	VSWR
89762-1420	6.0	0.75 dB	1.70 max to 26 GHz
89762-1421	9.0	1.12 dB	1.70 max to 26 GHz
89762-1422	12.0	1.50 dB	1.70 max to 26 GHz
89762-1423	120.0	15.0 dB	1.70 max to 26 GHz




2.92mm Plug to Plug, 086 Low Loss cable assemblies




Part Number	Length (inches)	Insertion Loss	VSWR
89762-1540	6.0	0.92 dB	1.50 max to 40 GHz
89762-1541	9.0	1.33 dB	1.50 max to 40 GHz
89762-1542	12.0	1.74 dB	1.50 max to 40 GHz
89762-1543	15.0	2.15 dB	1.50 max to 40 GHz
89762-1544	18.0	2.56 dB	1.50 max to 40 GHz
89762-1545	120.0	16.5 dB	1.50 max to 40 GHz

2.92mm Plug to 2.92mm Plug, 141 Low Loss cable assemblies




Part Number	Length	Insertion Loss	VSWR
89762-1620	6.0	0.59 dB	1.45 max to 40 GHz
89762-1621	9.0	0.84 dB	1.45 max to 40 GHz
89762-1622	12.0	1.08 dB	1.45 max to 40 GHz
89762-1623	15.0	1.33 dB	1.45 max to 40 GHz
89762-1624	18.0	1.57 dB	1.45 max to 40 GHz
89762-1625	120.0	9.9 dB	1.45 max to 40 GHz

2.92mm Plug to 2.92mm Plug, 047 Low Loss cable assemblies





Part Number	Length	Insertion Loss	VSWR
89762-1580	6.0	1.40 dB	1.50 max to 40 GHz
89762-1581	9.0	2.05 dB	1.50 max to 40 GHz
89762-1582	12.0	2.72 dB	1.50 max to 40 GHz
89762-1583	15.0	3.36 dB	1.50 max to 40 GHz
89762-1584	18.0	4.01 dB	1.50 max to 40 GHz
89762-1585	120.0	26.2 dB	1.50 max to 40 GHz

SMPP R/A Jack to R/A SMPP Jack, 047 Low Loss cable assemblies

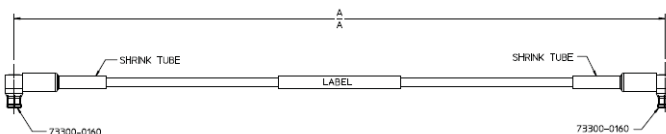

Part Number	Length	Insertion Loss	VSWR
89762-2740	2.0	1.05 dB	1.45 max to 18 GHz
89762-2741	4.0	1.17 dB	1.45 max to 18 GHz
89762-2742	6.0	1.41 dB	1.45 max to 18 GHz
89762-2743	12.0	2.73 dB	1.45 max to 18 GHz
89762-2744	18.0	4.02 dB	1.45 max to 18 GHz
89762-2745	24.0	26.3 dB	1.45 max to 18 GHz



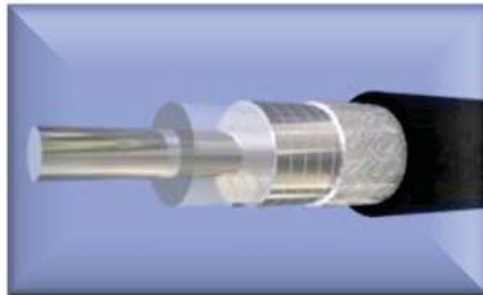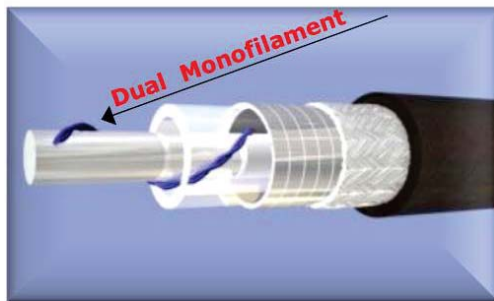

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru