SPECIFICATION CONTROL DRAWING

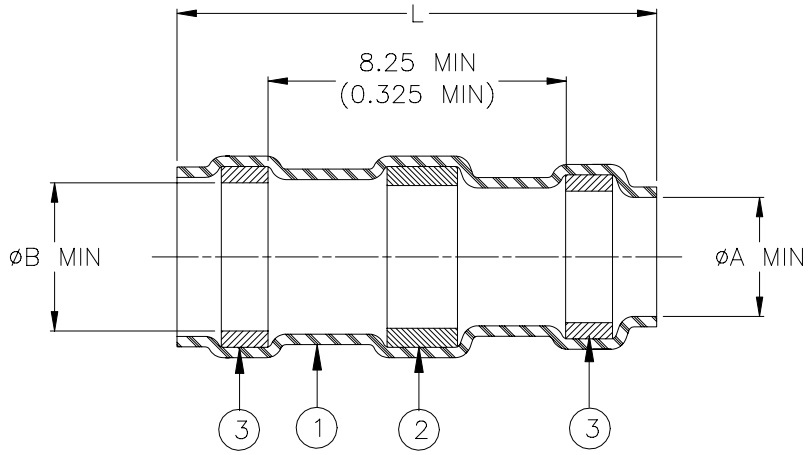

Product Revision		Product Dimensions				Cable Dimensions			
Product Name		Ident. Code	L±1.75 (L±0.070)	øA min	øB min	øD max	øE max	øF min	øG min
ST63-1-00	B	ST631R	16.50 (0.650)	1.90 (0.075)	2.65 (0.105)	1.90 (0.075)	2.65 (0.105)	0.90 (0.035)	0.50 (0.020)
ST63-2-00	B	ST632R	16.50 (0.650)	2.65 (0.105)	3.68 (0.145)	2.65 (0.105)	3.68 (0.145)	1.40 (0.055)	0.72 (0.030)
ST63-3-00	B	ST633R	16.50 (0.650)	4.30 (0.170)	5.08 (0.200)	4.30 (0.170)	5.08 (0.200)	2.15 (0.085)	1.25 (0.050)
ST63-4-00	B	ST634R	19.10 (0.750)	5.95 (0.235)	6.45 (0.255)	5.95 (0.235)	6.45 (0.255)	3.30 (0.130)	1.80 (0.070)
ST63-5-00	B	ST635R	19.10 (0.750)	7.00 (0.275)	7.60 (0.300)	7.00 (0.275)	7.60 (0.300)	4.30 (0.170)	2.50 (0.100)

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:
   SOLDER: TYPE Sn63 per ANSI-J-STD-006.
   FLUX: TYPE ROL1 per ANSI-J-STD-004.
3. MELTABLE RINGS: Stabilized thermoplastic. Color: blue.

APPLICATION

1. These parts are designed to provide an environment resistant shield terminations on cables, rated for 125°C minimum, meeting the dimensional criteria listed, having tin or silver plated shields and insulation.
2. When installed per Raychem process standard RCPS-100-70, assemblies will meet requirements of Raychem Specification RT-1404.
3. Temperature range: -55°C to +150°C.
4. For best results, prepare the cable as shown:

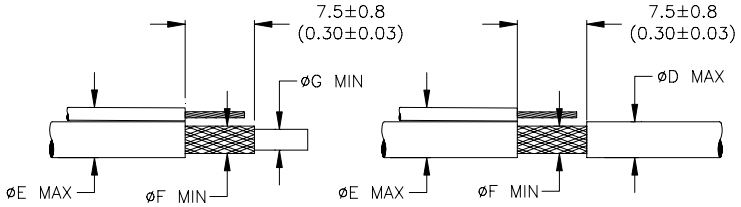

tyco Electronics / Raychem Products, 305 Constitution Drive, Menlo Park, CA. 94025, USA			TITLE: SOLDERSLEEVE SHIELD TERMINATOR			
Unless otherwise specified dimensions are in millimeters. Inches dimensions are shown in brackets.			DOCUMENT NO.: ST63-X-00			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	PROD. REV.: SEE TABLE	DOC. ISSUE: 6	DATE: 6-Dec-02	
PREPARED BY: mforonda		DCR NUMBER: D020557	REPLACES: D981346	SCALE: None	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision.

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru