HAMLIN®

www.hamlin.com

55110 Flange Mount Hall Effect Sensor with L.E.D.

Features
- Magnetically operated position sensor
- Digital or Latching types available
- Integral LED
- Medium or high sensitivities
- 3 wire (voltage output)
- Reverse/Over volltage protection
- Built in temperature compensation

Benefits
- High switching speed up to 10kHz
- Long life; up to 20 billion operations
- Visual indication of operation
- Unaffected by harsh environments
- Operates in static or dynamic magnetic field
- Customer selection of cable length and connector type

Applications
- Position and limit sensing
- RPM measurement
- Flow metering
- Commutation of brushless dc motors
- Angle sensing
- Magnetic encoders

DIMENSIONS (in) mm

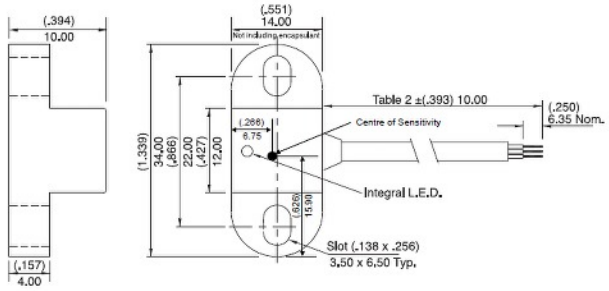

General Tol.: ± (.010) 0.25

BLOCK DIAGRAMS

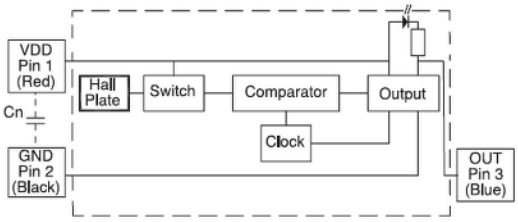

Note: Add capacitor Cn as shown, close for the sensors for transient suppression if required.

CUSTOMER OPTIONS - Specifications

			Digital Switch or Digital Latch
Hall Type			**3 Wire (Voltage output)**
Supply Voltage (Note 1)	Absolute Rating	Vdc	-15 to +28
	Operate	Vdc	+3.8 to +24
	Overvoltage Protection	Vdc - max.	32
Output High Voltage		Vdc - min.	Vdd-2 @ 0.1mA (sinking output with internal pull-up)
Output Low voltage		Vdc - max.	0.4 @ 20mA
Output Current (continuously on)		mA - max.	20
Switching Speed		Khz - max.	10
Temperature	Operating Storage	°C °C	-40 to +85 -65 to +85

Note 1: As long as Tj (Junction Temperature) max. Is not exceeded.

CUSTOMER OPTIONS - Sensitivity, Cable Length and Termination Specification

Table 1

HALL OPTIONS
ACTIVATE DISTANCES ARE APPROXIMATE
USING NEFEB MAGNET
(.827l x .276W x .185H) 21 x 7 x 4.7
HAMLIN P/N 5812334000



Select Hall Option	Hall Type	Sensitivity Gauss (typ.)	Activate - d (in) mm
3M	3 Wire Switch	130	(.492) 12,5
3H	3 Wire Switch	59	(.709) 18,0
3L	3 Wire Latch	86	(.394) 10,0

Table 2

Cable Length:-
(Cable Type 24AWG 7/32 PVC 105° C UL 1430/UL1569)

Standard Lengths

SELECT OPTION	CABLE LENGTH (in) mm
01	(3.94) 100
02	(11.81) 300
03	(19.69) 500
04	(29.53) 750
05	(39.37) 1000

Table 3

Termination Options:-

SELECT OPTION	DESCRIPTION (2 WIRE VERSION ILLUSTRATED	
A	Tinned Leads	
D	AMP MTE 2.54mm pitch	
E	JST XHP 2.5mm pitch	

ORDERING INFORMATION

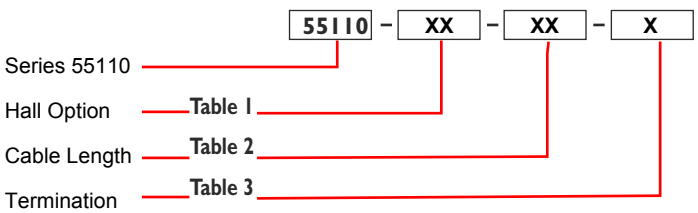

Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com
Hamlin Europe Tel: +44 (0)1603 257700 • Fax: +44 (0)1603 257702 • Email: sales.uk@hamlin.com
Hamlin China Tel: +86 (0) 512 69365 800 • Fax: +86 (0) 512 69365 811 • Email: sales.cn@hamlin.com

DRGNo: 55100XXXXX REV : AE Date: 9/6/12 DCR: B9016

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru