
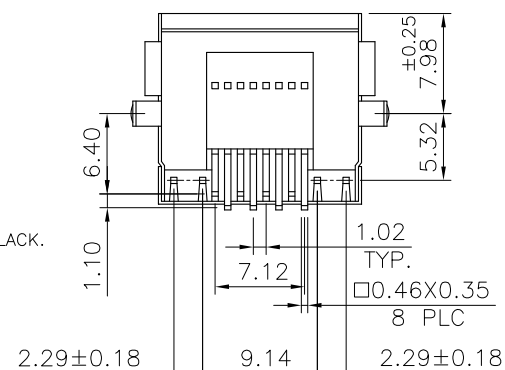
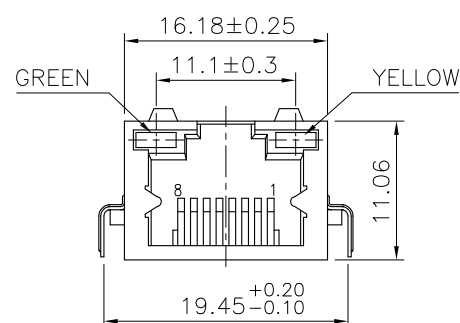
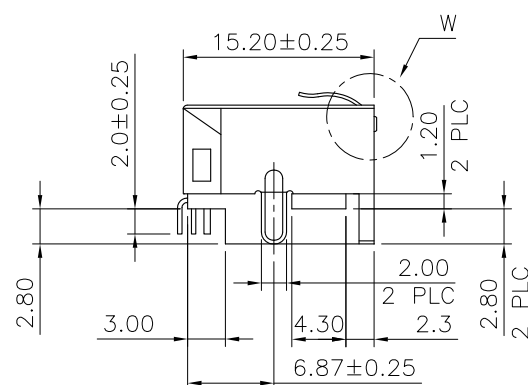


W/O LED LIGHT

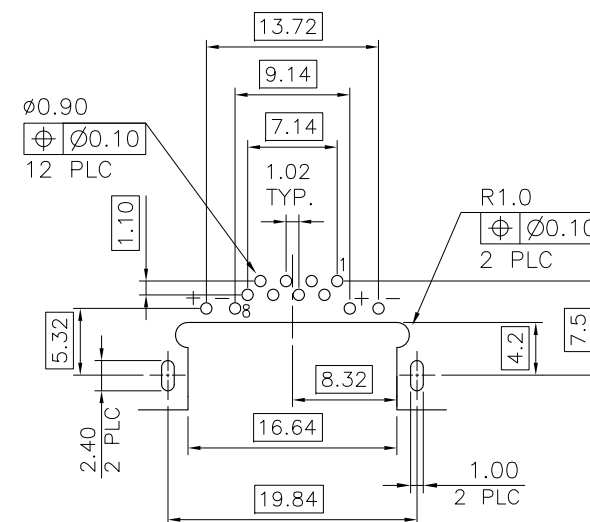

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6mm)
(DIMENSION TOLERANCE: 1 PLC: ± 0.1 2PLC: ± 0.05)

△6. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	REEL	W/O	50μ"	3-1734719-8
			30μ"	3-1734719-7
			15μ"	3-1734719-6
			6μ"	3-1734719-5
		W/	50μ"	3-1734719-4
			30μ"	3-1734719-3
			15μ"	3-1734719-2
			6μ"	3-1734719-1
6 OBSOLETE OBSOLETE OBSOLETE OBSOLETE	TRAY	W/O	50μ"	1734719-8
			30μ"	1734719-7
			15μ"	1734719-6
			6μ"	1734719-5
		W/	50μ"	1734719-4
			30μ"	1734719-3
			15μ"	1734719-2
			6μ"	1734719-1
PACKAGE	LED LIGHT	MIN. GOLD THICKNESS	PART NUMBER	

CUSTOMER DRAWING

DIMENSIONS:	
MM	
	
MATERIAL	
SEE NOTE	


TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC	± 0.5
1 PLC	± 0.3
2 PLC	± 0.2
3 PLC	± 0.1
4 PLC	$\pm -$
ANGLES	$\pm 3'$
FINISH	
SEE NOTE	

DWN	O. HU	13DEC200
CHK	S. HOU	13DEC200
APVD	W.J. KE	13DEC200
PRODUCT SPEC		
108-57535		
APPLICATION SPEC		
—		
WEIGHT	3 GRAMS	
CUSTOMER DRAWING		

TE Connectivity






MODULAR JACK, RJ45, SINGLE
ENTRY, DIP TYPE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
A3	00779	C-1734719	—		
		SCALE	—	SHEET	1 of 4
				REV	A2




DETAIL W

TE LOGO &
DATE CODE

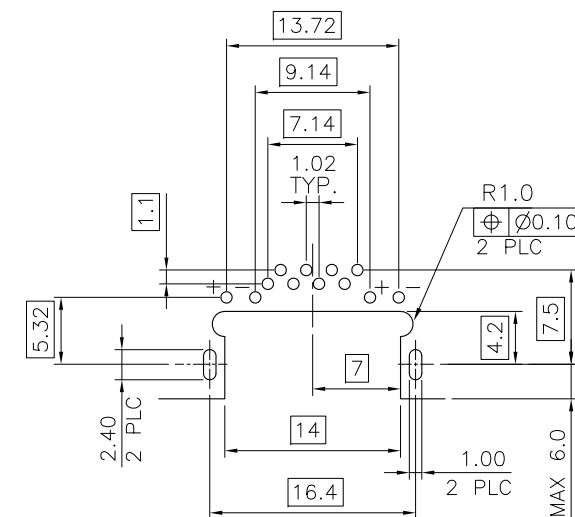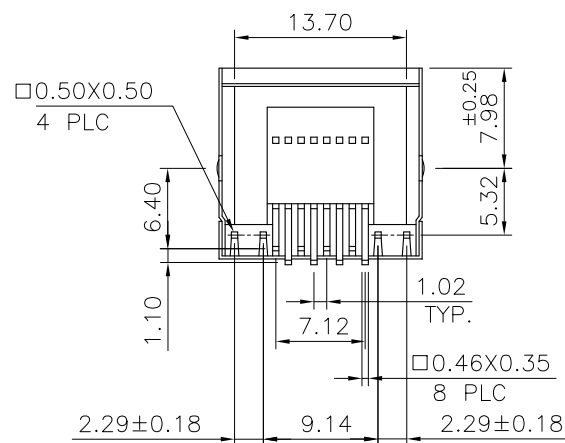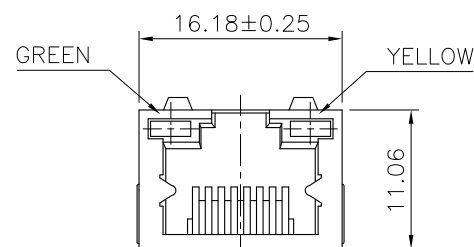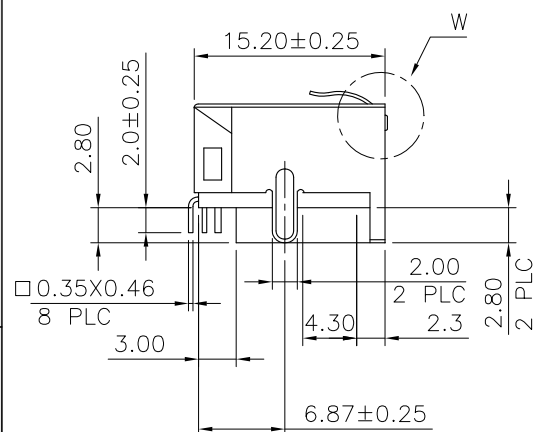

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6mm)
(DIMENSION TOLERANCE: 1 PLC: ±0.1 2PLC: ±0.05)



W/O LED LIGHT

NOTE:

- MATERIAL:
HOUSING: THERMOPLASTIC HIGH TEMP., UL94V-0, COLOR: BLACK.
CONTACT: PHOSPHOR BRONZE, THICKNESS: 0.35mm.
SHELL: BRASS, THICKNESS: 0.20mm.
- FINISH:
CONTACT: GOLD PLATED (SEE TABLE) IN CONTACT AREA,
GOLD FLASH ON SOLDER TAILS,
50u" MIN. NICKEL UNDER PLATED ALL OVER.
SHELL: 20u" MIN. NICKEL PLATED.
- WAVE SOLDER CAPABLE TO 265°C PER TYCO SPEC 109-202,
CONDITION B.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN —		 TE Connectivity		THICKNESS	
		CHK —					
		APVD —		NAME			
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		MODULAR JACK, RJ45, SINGLE ENTRY, DIP TYPE			
		0 PLC ± 0.5 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.1 4 PLC ± — ANGLES ± 3°		PRODUCT SPEC —		SIZE	
				APPLICATION SPEC —		CAGE CODE	
MATERIAL		FINISH		WEIGHT —		DRAWING NO	
SEE NOTE		SEE NOTE		A3		00779	
				CUSTOMER DRAWING		DRAWING NO	
						RESTRICTED TO	
				A300779		C=1734719	
				SCALE —		SHEET	
						2 OF 4	
						REV A2	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT 2013

BY TE CONNECTIVITY.

ALL RIGHTS RESERVED.

LOC
DWDIST
—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

TOP TRAY

CLAPBOARD

INNER BOX

BOX

370mm(L)X255mm(W)X220mm(H)
11 TRAY/CARTON
TOTAL: 880 PCS
GROSS WEIGHT: 5Kg Ref.

330mm(L)X225mm(W)X15mm(H)
80 PCS/TRAY

TRAY

H

W

L

W

L

H

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	—
CHK	—
APVD	—
PRODUCT SPEC	—
APPLICATION SPEC	—
WEIGHT	—



TE Connectivity

DIMENSIONS:

MM

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL

FINISH

NAME			
MODULAR JACK, RJ45, SINGLE ENTRY, DIP TYPE			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C=1734719	—
CUSTOMER DRAWING		SCALE	SHEET 3 of 4
			REV A2

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

ALL RIGHTS RESERVED.

© COPYRIGHT 2013 BY TE CONNECTIVITY.

LOC
DWDIST
—

REVISIONS

P

LTR





DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1

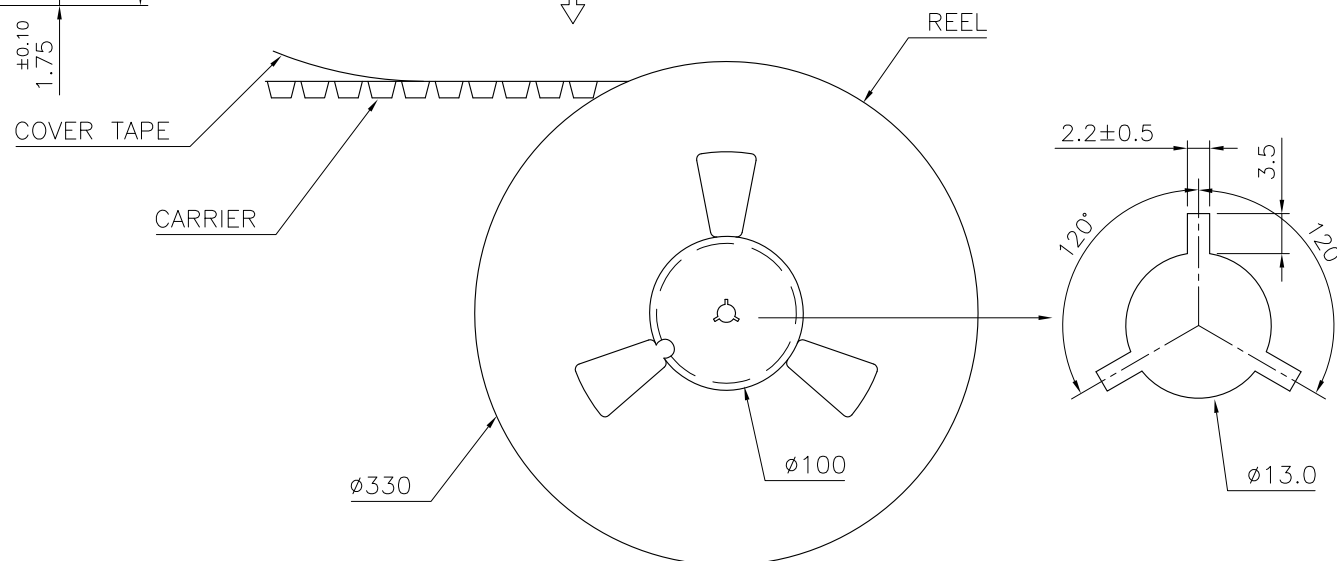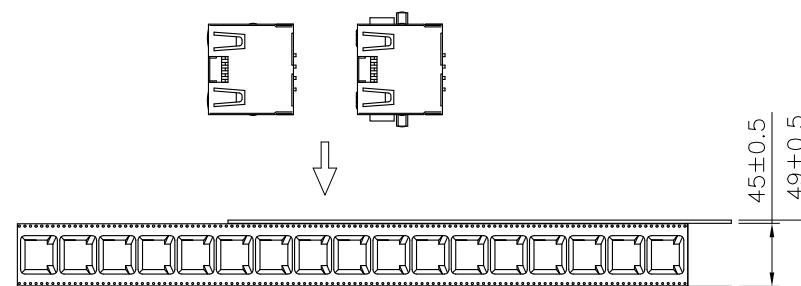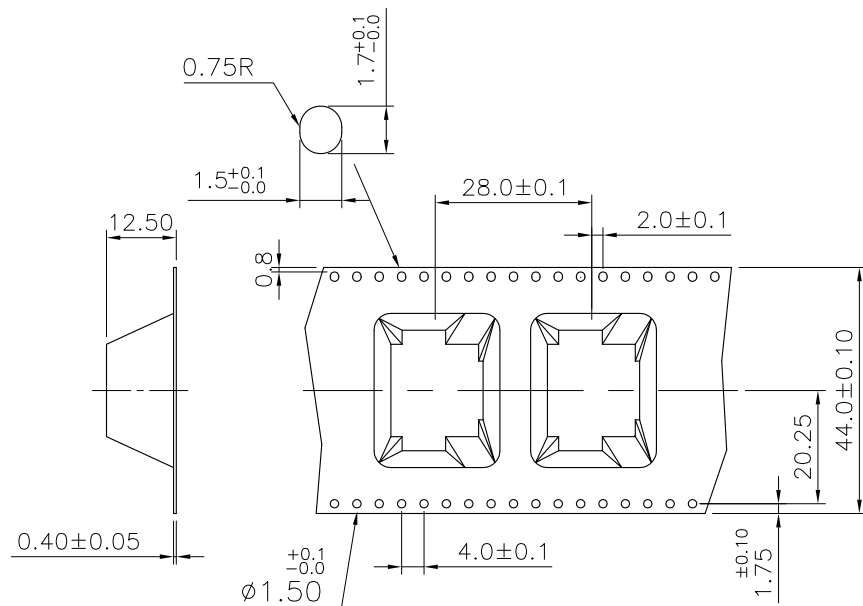

NOTES:

- THE DIRECTION OF JACKS PUT INTO CARRIER.
- 10 EMPTY CAVITIES FOR BOTH OF TOP AND BOTTOM OF THE CARRIER.
- 200 PCS PRODUCTS BE PACKAGED ONE REEL.
- BOX SIZE: 345(L)X345(W)X315(H)
6 REEL/BOX
TOTAL: 1200 PCS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

—

CHK

—

APVD

—

PRODUCT SPEC

—

APPLICATION SPEC

—

WEIGHT

—

NAME

TE

TE Connectivity

MODULAR JACK, RJ45, SINGLE ENTRY, DIP TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734719

—

CUSTOMER DRAWING

SCALE

—

SHEET

4 of 4

REV

A2

DIMENSIONS:

MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC

1 PLC

2 PLC

3 PLC


4 PLC

ANGLES

FINISH

—

—



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru