

## UUX

Chip Type, Wide Temperature Range



For SMD



Anti-Solvent  
Feature  
(Through  
100V only)

- Chip type, operating over wide temperature range of to -55 to +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU, (EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.



## Specifications

| Item                          | Performance Characteristics                                                                                                                                                                                                             |                                                                                                      |      |      |      |      |      |      |                    |                                                   |      |      |      |     |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|------|------|------|------|------|------|--------------------|---------------------------------------------------|------|------|------|-----|
| Category Temperature Range    | -55 to +105°C (6.3 to 100V), -40 to +105°C (160 to 400V)                                                                                                                                                                                |                                                                                                      |      |      |      |      |      |      |                    |                                                   |      |      |      |     |
| Rated Voltage Range           | 6.3 to 400V                                                                                                                                                                                                                             |                                                                                                      |      |      |      |      |      |      |                    |                                                   |      |      |      |     |
| Rated Capacitance Range       | 1 to 1000μF                                                                                                                                                                                                                             |                                                                                                      |      |      |      |      |      |      |                    |                                                   |      |      |      |     |
| Capacitance Tolerance         | ±20% at 120Hz, 20°C                                                                                                                                                                                                                     |                                                                                                      |      |      |      |      |      |      |                    |                                                   |      |      |      |     |
| Leakage Current               | Rated voltage (V)                                                                                                                                                                                                                       | 6.3 to 100                                                                                           |      |      |      |      |      |      |                    | 160 to 400                                        |      |      |      |     |
|                               | Leakage Current                                                                                                                                                                                                                         | After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV (μA). |      |      |      |      |      |      |                    | I = 0.04CV+100 (μA) max.(1 minute's at 20°C)      |      |      |      |     |
| Tangent of loss angle (tan δ) | Measurement frequency : 120Hz at 20°C                                                                                                                                                                                                   |                                                                                                      |      |      |      |      |      |      |                    |                                                   |      |      |      |     |
|                               | Rated voltage (V)                                                                                                                                                                                                                       | 6.3                                                                                                  | 10   | 16   | 25   | 35   | 50   | 63   | 100                | 160                                               | 200  | 250  | 400  |     |
|                               | tan δ (MAX.)                                                                                                                                                                                                                            | 0.22                                                                                                 | 0.19 | 0.16 | 0.14 | 0.12 | 0.10 | 0.10 | 0.08               | 0.20                                              | 0.20 | 0.20 | 0.25 |     |
| Stability at Low Temperature  | Measurement frequency: 120Hz                                                                                                                                                                                                            |                                                                                                      |      |      |      |      |      |      |                    |                                                   |      |      |      |     |
|                               | Rated voltage (V)                                                                                                                                                                                                                       |                                                                                                      | 6.3  | 10   | 16   | 25   | 35   | 50   | 63                 | 100                                               | 160  | 200  | 250  | 400 |
|                               | Impedance ratio<br>ZT / Z20 (MAX.)                                                                                                                                                                                                      | Z-55°C / Z+20°C                                                                                      | 4    | 4    | 3    | 3    | 3    | 2    | 3                  | 4                                                 | —    | —    | —    | —   |
|                               |                                                                                                                                                                                                                                         | Z-40°C / Z+20°C                                                                                      | —    | —    | —    | —    | —    | —    | —                  | —                                                 | 6    | 6    | 6    | 10  |
| Endurance                     | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours (160 to 400V : 3000hours) at 105°C.                                                          |                                                                                                      |      |      |      |      |      |      | Capacitance change | Within ±20% of the initial capacitance value      |      |      |      |     |
|                               |                                                                                                                                                                                                                                         |                                                                                                      |      |      |      |      |      |      | tan δ              | 200% or less than the initial specified value     |      |      |      |     |
|                               |                                                                                                                                                                                                                                         |                                                                                                      |      |      |      |      |      |      | Leakage current    | Less than or equal to the initial specified value |      |      |      |     |
| Shelf Life                    | After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. |                                                                                                      |      |      |      |      |      |      |                    |                                                   |      |      |      |     |
| Resistance to soldering heat  | The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.               |                                                                                                      |      |      |      |      |      |      | Capacitance change | Within ±10% of the initial capacitance value      |      |      |      |     |
|                               |                                                                                                                                                                                                                                         |                                                                                                      |      |      |      |      |      |      | tan δ              | Less than or equal to the initial specified value |      |      |      |     |
|                               |                                                                                                                                                                                                                                         |                                                                                                      |      |      |      |      |      |      | Leakage current    | Less than or equal to the initial specified value |      |      |      |     |
| Marking                       | Black print on the case top.                                                                                                                                                                                                            |                                                                                                      |      |      |      |      |      |      |                    |                                                   |      |      |      |     |


## Chip Type

Type numbering system (Example : 10V 100μF)

(φ6.3, φ8 × 6.2)



(φ8 × 10, φ10)

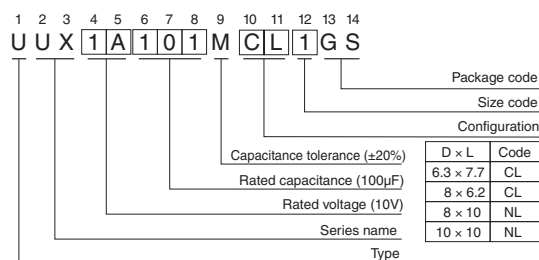

|        | (mm)       |            |            |            |
|--------|------------|------------|------------|------------|
| φD × L | 6.3 × 7.7  | 8 × 6.2    | 8 × 10     | 10 × 10    |
| A      | 2.4        | 3.3        | 2.9        | 3.2        |
| B      | 6.6        | 8.3        | 8.3        | 10.3       |
| C      | 6.6        | 8.3        | 8.3        | 10.3       |
| E      | 2.2        | 2.3        | 3.1        | 4.5        |
| L      | 7.7        | 6.2        | 10         | 10         |
| H      | 0.5 to 0.8 | 0.5 to 0.8 | 0.8 to 1.1 | 0.8 to 1.1 |

● Dimension table in next page.

UUX

## ■ Dimensions

| Cap.<br>(μF) | V   | 6.3     |          | 10     |          | 16       |          | 25     |          | 35       |        | 50       |        | 63     |          | 100                      |                 |
|--------------|-----|---------|----------|--------|----------|----------|----------|--------|----------|----------|--------|----------|--------|--------|----------|--------------------------|-----------------|
|              |     | 0J      |          | 1A     |          | 1C       |          | 1E     |          | 1V       |        | 1H       |        | 1J     |          | 2A                       |                 |
| 4.7          | 4R7 |         |          |        |          |          |          |        |          |          |        |          |        |        |          | 8×6.2                    | 42              |
| 10           | 100 |         |          |        |          |          |          |        |          |          |        |          |        | 8×6.2  | 51       | 8×10                     | 75              |
| 22           | 220 |         |          |        |          |          |          |        |          |          |        | ○ 8×6.2  | 67(64) | 8×10   | 108      | ■10×10                   | 150(121)        |
| 33           | 330 |         |          |        |          |          |          |        |          | ○ 8×6.2  | 76(75) | 8×10     | 133    | ■10×10 | 185(179) | 10×10                    | 180             |
| 47           | 470 |         |          |        |          |          | ○ 8×6.2  | 79(78) | 8×10     | 124      | ■10×10 | 180(167) | 10×10  | 220    | 10×10    | 230                      |                 |
| 100          | 101 |         | 8×6.2    | 90     | ○ 8×10   | 148(111) | 8×10     | 181    | ■ 10×10  | 304(283) | 10×10  | 310      | 10×10  | 320    |          |                          |                 |
| 220          | 221 | ○ 8×10  | 161(121) | 8×10   | 173      | ■ 10×10  | 330(307) | ■10×10 | 351(283) | 10×10    | 450    |          |        |        |          |                          |                 |
| 330          | 331 | 8×10    | 288      | ■10×10 | 318(296) | ■ 10×10  | 441(410) | 10×10  | 372      |          |        |          |        |        |          |                          |                 |
| 470          | 471 | ■ 10×10 | 340(316) | ■10×10 | 351(326) | 10×10    | 489      |        |          |          |        |          |        |        |          |                          |                 |
| 680          | 681 | 10×10   | 408      | 10×10  | 392      |          |          |        |          |          |        |          |        |        |          |                          |                 |
| 1000         | 102 | 10×10   | 495      |        |          |          |          |        |          |          |        |          |        |        |          | Case size<br>φD × L (mm) | Rated<br>ripple |

| Cap.<br>(μF) | V    | 160   |    | 200   |    | 250   |    | 400   |    |
|--------------|------|-------|----|-------|----|-------|----|-------|----|
|              | Code | 2C    |    | 2D    |    | 2E    |    | 2G    |    |
| 1            | 010  |       |    |       |    |       |    | 8×10  | 25 |
| 1.8          | 1R8  |       |    |       |    |       |    | 8×10  | 26 |
| 2.2          | 2R2  |       |    |       |    |       |    | 8×10  | 27 |
| 3.3          | 3R3  |       |    | 8×10  | 31 | 8×10  | 31 | 10×10 | 38 |
| 3.9          | 3R9  |       |    | 8×10  | 34 | 8×10  | 34 | 10×10 | 39 |
| 4.7          | 4R7  |       |    | 8×10  | 37 | 8×10  | 37 | 10×10 | 40 |
| 6.8          | 6R8  |       |    | 8×10  | 44 | 8×10  | 44 |       |    |
| 10           | 100  | 8×10  | 57 | 10×10 | 64 | 10×10 | 64 |       |    |
| 18           | 180  | 10×10 | 64 |       |    |       |    |       |    |

Rated ripple current (mArms) at 105°C 120Hz

Size  $\phi 6.3 \times 7.7$  is available for capacitors marked. "○" / Size  $\phi 8 \times 10$  is available for capacitors marked. "■"

※ In this case, [6] will be put at 12th digit of type numbering system.

## ● Frequency coefficient of rated ripple current

| Cap.( $\mu$ F) | Frequency | 50 Hz | 120 Hz | 300 Hz | 1 kHz | 10 kHz or more |
|----------------|-----------|-------|--------|--------|-------|----------------|
| 1 to 47        |           | 0.80  | 1.00   | 1.15   | 1.40  | 1.67           |
| 100 to 1000    |           | 0.85  | 1.00   | 1.08   | 1.20  | 1.30           |

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please select UUX(p.176) if high C/V products are required.
- Please refer to page 3 for the minimum order quantity.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)