



Metal Oxide Varistor	Disc type
SIOV-Q14K680	Ordering code: B72214Q0681K101
Data sheet	

Form: FBLE3K/b

File name: Q14K680\_a

**MODIFICATIONS:** New data sheet

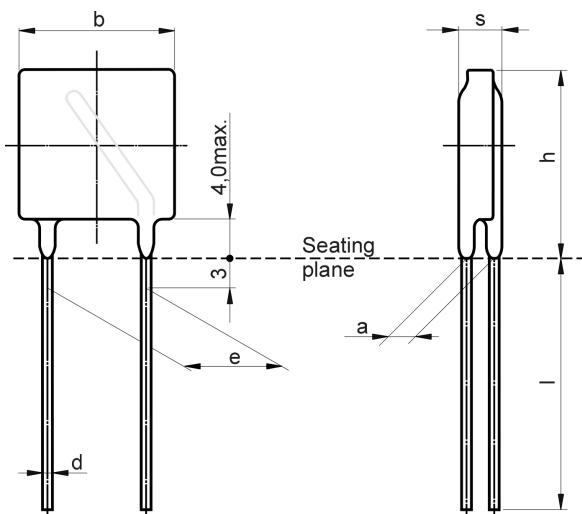
**REMARKS:**

<b>Prepared by</b>	Hotwagner	<b>Release</b>	signed: PE / Hotwagner		signed: QS / Zödl	
			signed:		signed:	
ISSUE DATE	22.05.02	ISSUE	a	PUBLISHER	KH PE VAR	PAGE
						0/6

**Metal Oxide Varistor**
**Disc type**
**SIOV-Q14K680**
**Ordering code: B72214Q0681K101**
**Data sheet**
**SIOV nomenclature**

Q = EnergetiQ™ Series  
 14 = Rated disk diameter  
 K = Tolerance of  $V_V$  at 1mA :  $\pm 10\%$   
 680 = Max. AC voltage

**Figure:** Dimensions given in Millimeters (mm)



$b_{max}$	=	16,5
$h_{max}$	=	19,5
$s_{max}$	=	9,9
$e$	=	$10,0 \pm 1,0$
$a$	=	$5,8 \pm 1,0$
$l_{min}$	=	30,0
$\emptyset d$	=	$1,0 \pm 0,05$

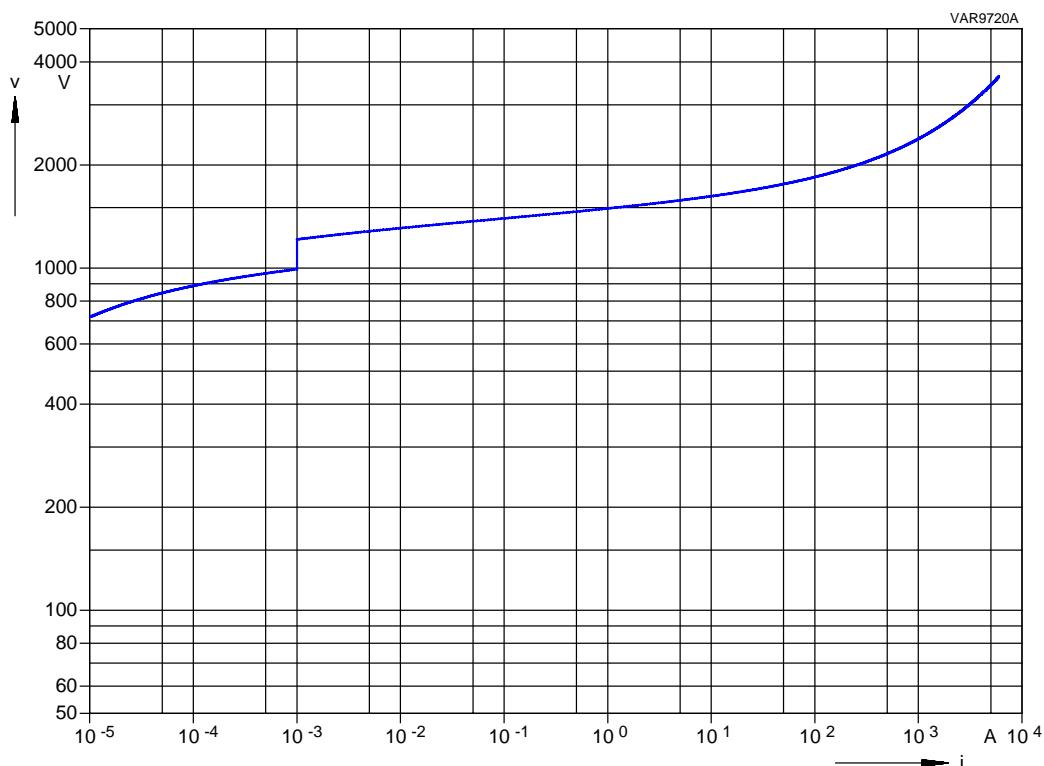
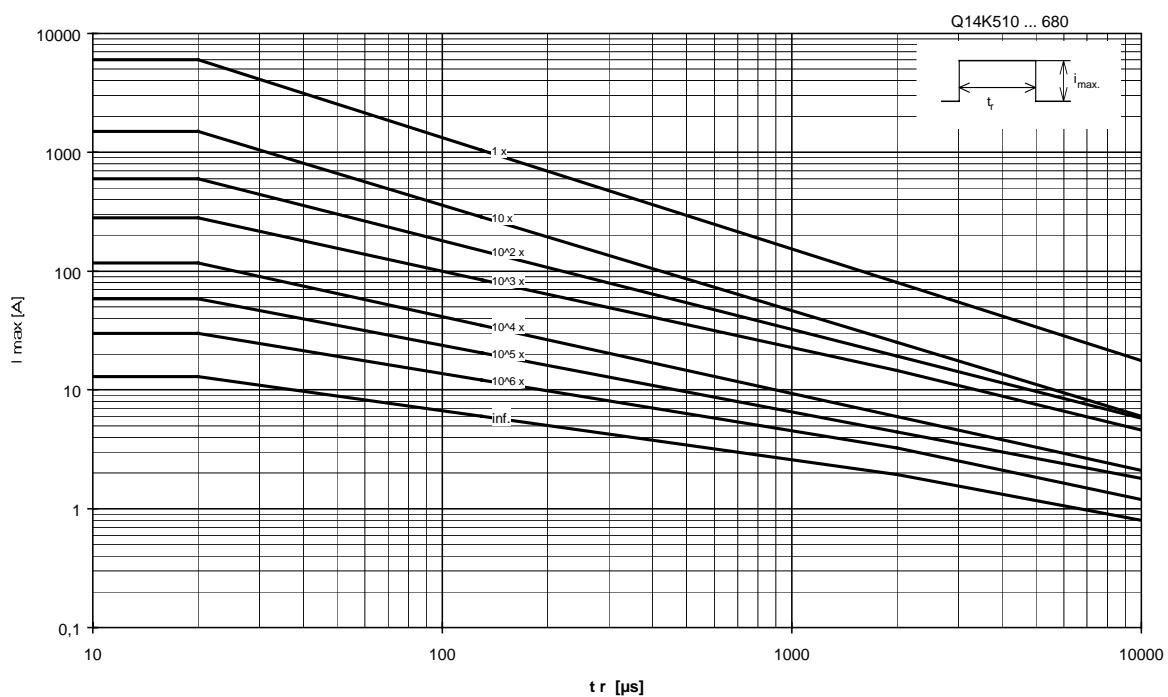
**Electrical data:**
**Maximum Ratings (85°C):**

Max. operating AC voltage	$V_{RMS}$	=	680V
Max. operating DC voltage	$V_{DC}$	=	895V
Surge current (8/20μs) 1 time	$I_{max}$	=	6000A
Energy absorption (2ms) 1 time	$W_{max}$	=	320J
Average power dissipation	$P_{max}$	=	0,80W

**Characteristics (25°C):**

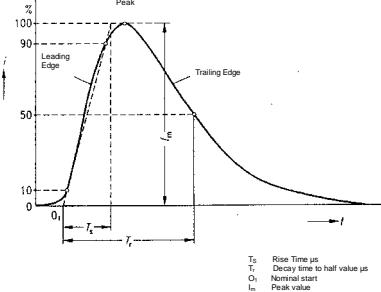
Varistor voltage at 1mA	$V_V$	=	$1100V \pm 10\%$
Clamping voltage at 65A (8/20μs)	$V_{C,max}$	=	1815V
Typ. capacitance at 1 kHz	C	=	200pF

ISSUE DATE	22.05.02	ISSUE	a	PUBLISHER	KH PE VAR	PAGE	1/6
------------	----------	-------	---	-----------	-----------	------	-----

**Metal Oxide Varistor**
**SIOV-Q14K680**
**Disc type**
**Ordering code: B72214Q0681K101**
**Data sheet**
**V/I Characteristic:**

**Derating:**


ISSUE DATE	22.05.02	ISSUE	a	PUBLISHER	KH PE VAR	PAGE	2/6
------------	----------	-------	---	-----------	-----------	------	-----

**Metal Oxide Varistor**
**Disc type**
**SIOV-Q14K680**
**Ordering code: B72214Q0681K101**
**Data sheet**
**Reliability Data:**

	<b>Characteristics</b>	<b>Test Methods/Description</b>	<b>Specifications</b>
E	Varistor Voltage	The voltage between two terminals with the specified measuring current applied is called $V_v$ (1 mA <sub>DC</sub> @ 0.2 - 2 s).	To meet the specified value.
L	Clamping Voltage	The maximum voltage between two terminals with the specified standard impulse current (8/20μs) illustrated below applied.	To meet the specified value.
E		 <p>Graph illustrating the 8/20 μs current pulse waveform. The vertical axis is labeled <math>i</math> and the horizontal axis is labeled <math>t</math>. The curve starts at <math>t_0</math> with a peak value <math>i_p</math>, rises to 90% of the peak during the rise time <math>T_r</math>, and falls to 50% of the peak during the decay time <math>T_d</math>. The nominal start point is at <math>t_0</math>.</p>	
C	Surge current derating, 8/20 μs	100 surge currents (8/20 μs), unipolar, interval 30 s, amplitude corresponding to derating curve for 20 μs	$ \Delta V/V (1 \text{ mA})  \leq 10\% \text{ (measured in direction of surge current)}$ No visible damage
A	Surge current derating, 2 ms	100 surge currents (2ms), unipolar, interval 120s, amplitude corresponding to derating curve for 2ms	$ \Delta V/V (1 \text{ mA})  \leq 10\% \text{ (measured in direction of surge current)}$ No visible damage
L			

**Metal Oxide Varistor**
**Disc type**
**SIOV-Q14K680**
**Ordering code: B72214Q0681K101**
**Data sheet**

	<b>Characteristics</b>	<b>Test Methods/Description</b>	<b>Specifications</b>										
M	Tensile strength	<p>After gradually applying the force specified below and keeping the unit fixed for 10 seconds, the terminal shall be visually examined for any damage.</p> <table> <thead> <tr> <th>Terminal diameter</th> <th>Force</th> </tr> </thead> <tbody> <tr> <td>0.5 mm</td> <td>5 N</td> </tr> <tr> <td>0.6 mm</td> <td>10 N</td> </tr> <tr> <td>0.8 mm</td> <td>10 N</td> </tr> <tr> <td>1.0 mm</td> <td>20 N</td> </tr> </tbody> </table>	Terminal diameter	Force	0.5 mm	5 N	0.6 mm	10 N	0.8 mm	10 N	1.0 mm	20 N	$ \Delta V/V (1 \text{ mA})  \leq 5\%$ No break of solder joint, no wire break
Terminal diameter	Force												
0.5 mm	5 N												
0.6 mm	10 N												
0.8 mm	10 N												
1.0 mm	20 N												
E	Vibration	<p>After repeatedly applying a single harmonic vibration according to the table below. Thereafter, the unit shall be visually examined.</p> <p>frequency range: 10 .... 55 Hz          amplitude: 0.75 mm or 98 m/s<sup>2</sup>          duration: 6 h (3 x 2 h)          pulse: sine wave</p>	$ \Delta V/V (1 \text{ mA})  \leq 5\%$ No visible damage										
A N I C A L	Solderability	<p>After dipping the terminals to a depth of approximately 3 mm from the body in a soldering bath of 235°C for 5 seconds, the terminals shall be visually examined.</p>	The inspection shall be carried out under adequate light with normal eyesight or with the assistance of a magnifier capable of giving a magnification of 4 times to 10 times. The dipped surface shall be covered with a smooth and bright solder coating with no more than small amounts of scattered imperfections such as pinholes or un-wetted or de-wetted areas. These imperfections shall not be concentrated in one area.										

**Metal Oxide Varistor**
**Disc type**
**SIOV-Q14K680**
**Ordering code: B72214Q0681K101**
**Data sheet**

	<b>Characteristics</b>	<b>Test Methods/Description</b>	<b>Specifications</b>
M E C H A	Resistance to soldering heat	Each lead shall be dipped into a solder bath having a temperature of $260 \pm 5^\circ\text{C}$ to a point 2.0 to 2.5 mm from the body of the unit, be held there for $10 \pm 1$ s and then be stored at room temperature and normal humidity for 1 to 2 hours. The change of $V_v$ and mechanical damages shall be examined.	$ \Delta V/V (1 \text{ mA})  \leq 5 \%$ No visible damage
N I C A L	Electric strength	2500 V <sub>RMS</sub> , 10 s The varistor is placed in a container holding 1.6 $\pm 0.2$ mm diameter metal balls such that only the terminations of the varistor are protruding. The specified voltage shall be applied between both terminals of the specimen connected together and the electrode inserted between the metal balls.	No breakdown

**Metal Oxide Varistor**
**Disc type**
**SIOV-Q14K680**
**Ordering code: B72214Q0681K101**
**Data sheet**

	<b>Characteristics</b>	<b>Test Methods/Description</b>	<b>Specifications</b>												
E N	Max. AC operating voltage	After being continuously applied the maximum allowable voltage at $85 \pm 2^\circ\text{C}$ for 1000 hours, the specimen shall be stored at room temperature and normal humidity for 1 to 2 hours. Thereafter, the change of $V_v$ shall be measured.	$ \Delta V/V (1 \text{ mA})  \leq 10 \%$												
V I	Damp heat, steady state	The specimen shall be subjected to $40 \pm 2^\circ\text{C}$ , 90 to 95 % r.H. for 56 days without load and then stored at room temperature and normal humidity for 1 to 2 hours. Thereafter, the change of $V_v$ shall be measured.	$ \Delta V/V (1 \text{ mA})  \leq 10 \%$												
R O N M	Climatic sequence	The specimen shall be subjected to: a) dry heat at $+85^\circ\text{C}$ , 16 h b) damp heat, 1st cycle: $55^\circ\text{C}$ , 93 % r.H., 24 h c) cold, $-40^\circ\text{C}$ , 2 h d) damp heat, additional 5 cycles: $55^\circ\text{C}$ , 93 % r.H., 24 h/cycle Then the specimen shall be stored at room temperature and normal humidity for 1 to 2 hours. Thereafter, the change of $V_v$ shall be measured.	$ \Delta V/V (1 \text{ mA})  \leq 10 \%$												
E N T A L	Fast temperature cycling	The temperature cycle shown below shall be repeated 5 times. Then the specimen shall be stored at room temperature and normal humidity for 1 to 2 hours. The change of $V_v$ and mechanical damage shall be examined.  <table> <thead> <tr> <th>Step</th> <th>Temperature (<math>^\circ\text{C}</math>)</th> <th>Period (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>-40 \pm 3</math></td> <td><math>30 \pm 3</math></td> </tr> <tr> <td>2</td> <td>transition time</td> <td><math>&lt; 10 \text{ s}</math></td> </tr> <tr> <td>3</td> <td><math>85 \pm 2</math></td> <td><math>30 \pm 3</math></td> </tr> </tbody> </table>	Step	Temperature ( $^\circ\text{C}$ )	Period (min.)	1	$-40 \pm 3$	$30 \pm 3$	2	transition time	$< 10 \text{ s}$	3	$85 \pm 2$	$30 \pm 3$	$ \Delta V/V (1 \text{ mA})  \leq 5 \%$ No visible damage
Step	Temperature ( $^\circ\text{C}$ )	Period (min.)													
1	$-40 \pm 3$	$30 \pm 3$													
2	transition time	$< 10 \text{ s}$													
3	$85 \pm 2$	$30 \pm 3$													

Note: More details can be found in the data book 'SIOV Metal Oxide Varistors', Ordering No. EPC: 62002-7600

© EPCOS AG 2002. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

ISSUE DATE	22.05.02	ISSUE	a	PUBLISHER	KH PE VAR	PAGE	6/6
------------	----------	-------	---	-----------	-----------	------	-----

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru