

## LOW DROP POWER SCHOTTKY RECTIFIER

### MAIN PRODUCTS CHARACTERISTICS

$I_{F(AV)}$	3 A
$V_{RRM}$	40 V
$T_j$	150°C
$V_F(\text{max})$	0.475 V

### FEATURES AND BENEFITS

- VERY SMALL CONDUCTION LOSSES
- NEGLIGIBLE SWITCHING LOSSES
- EXTREMELY FAST SWITCHING
- LOW FORWARD VOLTAGE DROP
- AVALANCHE CAPABILITY SPECIFIED

### DESCRIPTION

Axial Power Schottky rectifier suited for Switch Mode Power Supplies and high frequency DC to DC converters. Packaged in DO-201AD these devices are intended for use in low voltage, high frequency inverters, free wheeling, polarity protection and small battery chargers.

### ABSOLUTE RATINGS (limiting values)

Symbol	Parameter	Value			Unit
		1N5820	1N5821	1N5822	
$V_{RRM}$	Repetitive peak reverse voltage	20	30	40	V
$I_{F(\text{RMS})}$	RMS forward current	10			A
$I_{F(AV)}$	Average forward current	$T_L = 100^\circ\text{C}$	$\delta = 0.5$	3	A
		$T_L = 110^\circ\text{C}$	$\delta = 0.5$	3	A
$I_{FSM}$	Surge non repetitive forward current	$tp = 10 \mu\text{s}$	Sinusoidal	80	A
$P_{ARM}$	Repetitive peak avalanche power	$tp = 1\mu\text{s}$	$T_j = 25^\circ\text{C}$	1700	W
$T_{stg}$	Storage temperature range	- 65 to + 150			°C
$T_j$	Maximum operating junction temperature *	150			°C
$dV/dt$	Critical rate of rise of reverse voltage	10000			V/ $\mu\text{s}$

\* :  $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th}(j - a)}$  thermal runaway condition for a diode on its own heatsink

## 1N582x

### THERMAL RESISTANCES

Symbol	Parameter		Value	Unit
$R_{th}(j-a)$	Junction to ambient	Lead length = 10 mm	80	°C/W
$R_{th}(j-l)$	Junction to lead	Lead length = 10 mm	25	°C/W

### STATIC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Tests Conditions		1N5820	1N5821	1N5822	Unit
$I_R^*$	Reverse leakage current	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$	2	2	2	mA
		$T_j = 100^\circ\text{C}$		20	20	20	mA
$V_F^*$	Forward voltage drop	$T_j = 25^\circ\text{C}$	$I_F = 3 \text{ A}$	0.475	0.5	0.525	V
		$T_j = 25^\circ\text{C}$	$I_F = 9.4 \text{ A}$	0.85	0.9	0.95	V


Pulse test : \*  $t_p = 380 \mu\text{s}$ ,  $\delta < 2\%$

To evaluate the conduction losses use the following equations :

$$P = 0.33 \times I_{F(AV)} + 0.035 I_{F}^2(\text{RMS}) \text{ for 1N5820 / 1N5821}$$


$$P = 0.33 \times I_{F(AV)} + 0.060 I_{F}^2(\text{RMS}) \text{ for 1N5822}$$

**Fig. 1:** Average forward power dissipation versus average forward current (1N5820/1N5821).


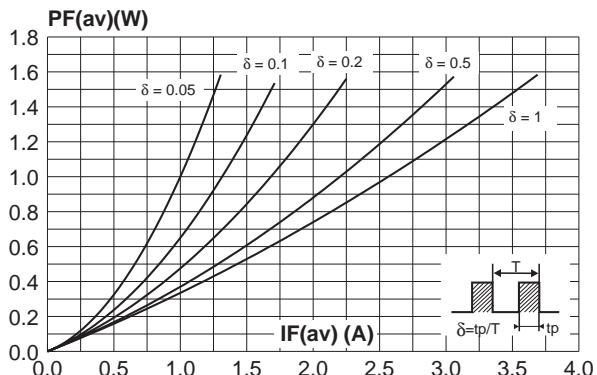


**Fig. 3:** Normalized avalanche power derating versus pulse duration.


**Fig. 2:** Average forward power dissipation versus average forward current (1N5822).

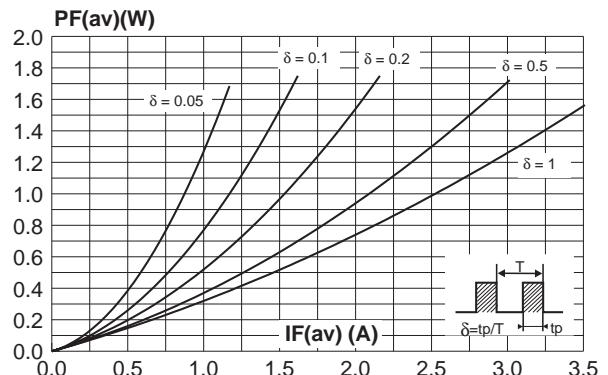


**Fig. 4:** Normalized avalanche power derating versus junction temperature.

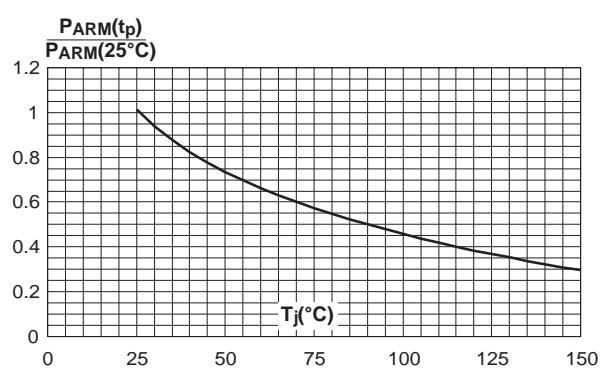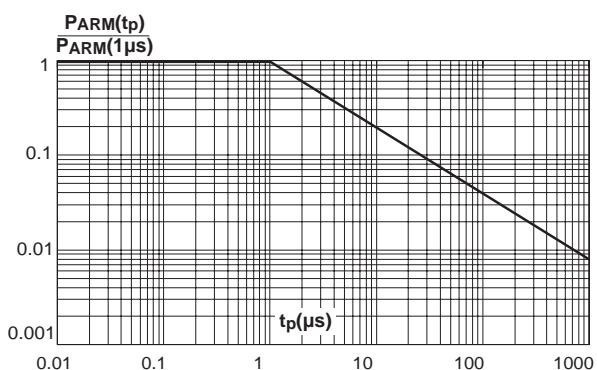


**Fig. 5-1:** Average forward current versus ambient temperature ( $\delta=0.5$ ) (1N5820/1N5821).

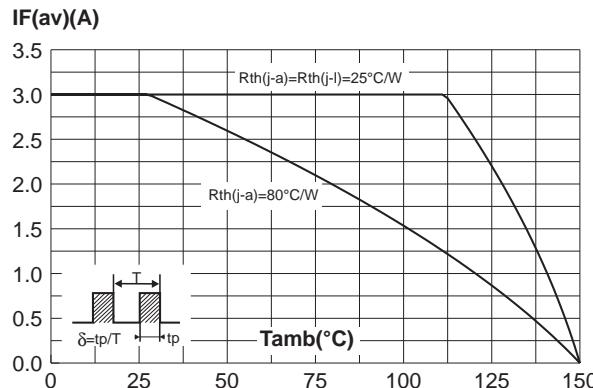


**Fig. 6-1:** Non repetitive surge peak forward current versus overload duration (maximum values) (1N5820/1N5821).

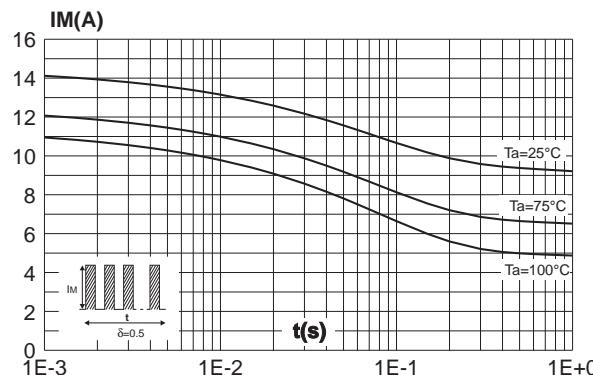


**Fig. 7:** Relative variation of thermal impedance junction to ambient versus pulse duration (epoxy printed circuit board,  $e(Cu)=35\text{mm}$ , recommended pad layout).

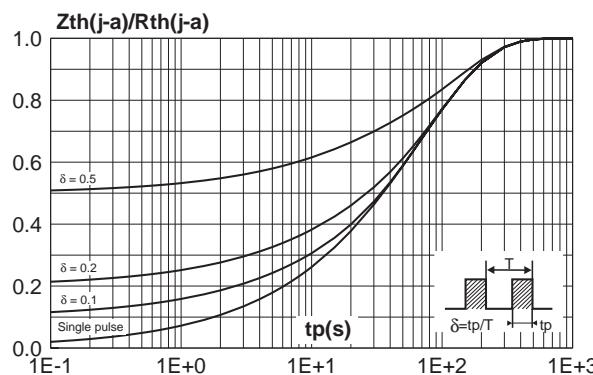


**Fig. 5-2:** Average forward current versus ambient temperature ( $\delta=0.5$ ) (1N5822).

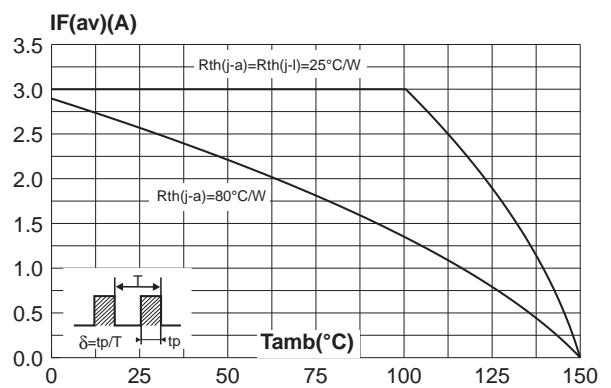

**Fig. 6-2:** Non repetitive surge peak forward current versus overload duration (maximum values) (1N5822).

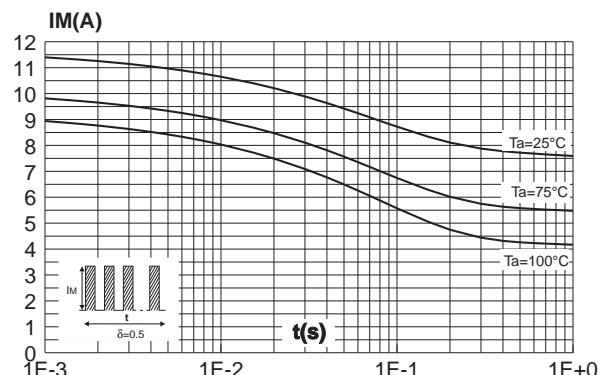


**Fig. 8:** Junction capacitance versus reverse voltage applied (typical values).

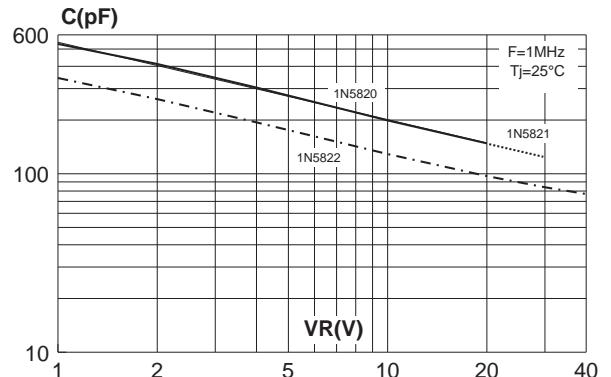


## 1N582x

---


**Fig. 9-1:** Reverse leakage current versus reverse voltage applied (typical values) (1N5820/1N5821).

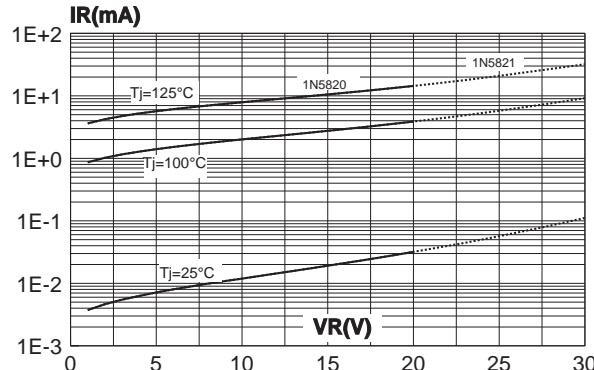


**Fig. 9-2:** Reverse leakage current versus reverse voltage applied (typical values) (1N5822).

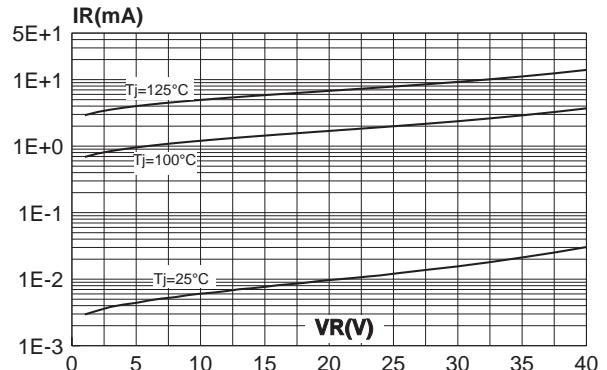


**Fig. 10-1:** Forward voltage drop versus forward current (typical values) (1N5820/1N5821).

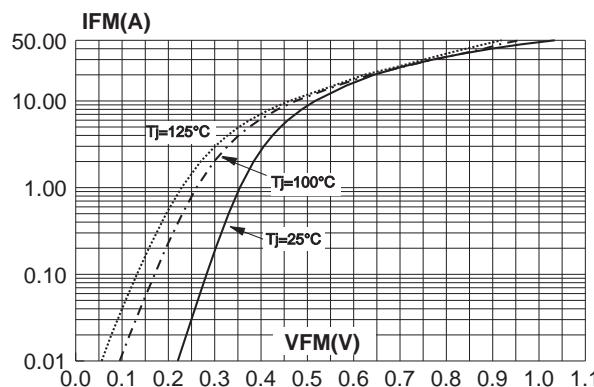

**Fig. 10-2:** Forward voltage drop versus forward current (typical values) (1N5822).

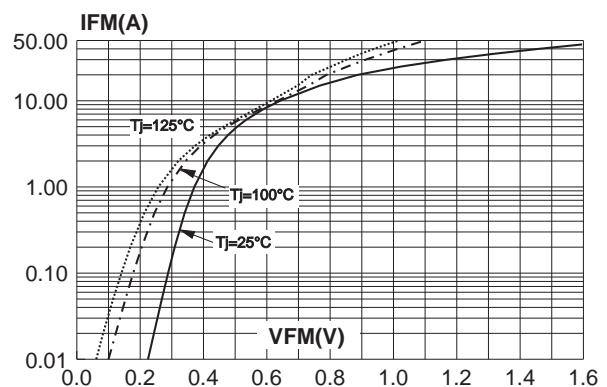


**Fig. 11:** Non repetitive surge peak forward current versus number of cycles.

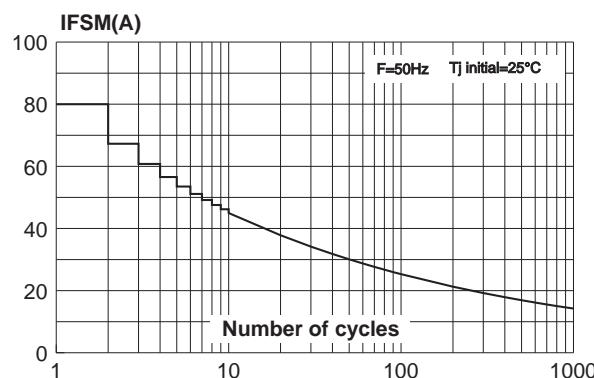

## PACKAGE MECHANICAL DATA

DO-201AD plastic

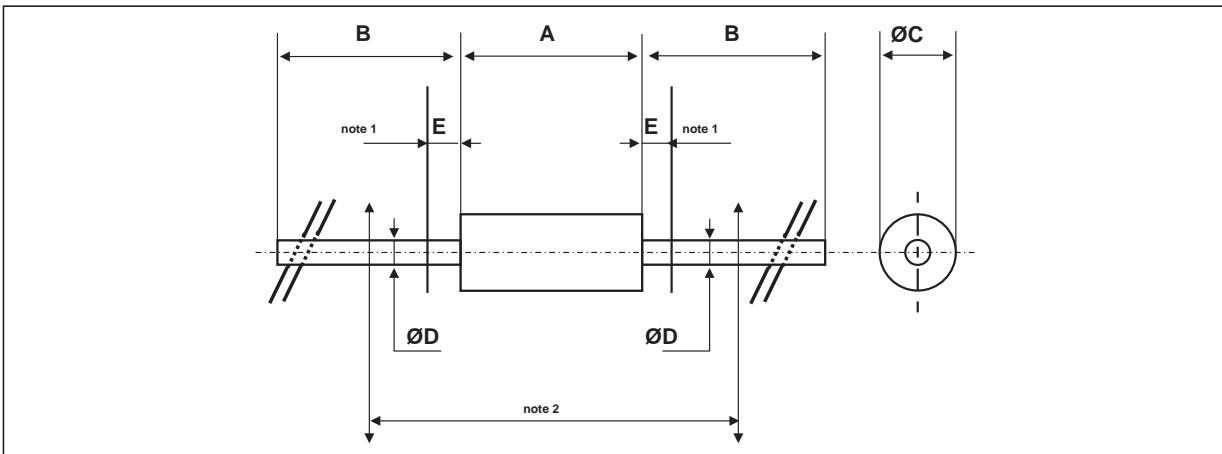

REF.	DIMENSIONS				NOTES	
	Millimeters		Inches			
	Min.	Max.	Min.	Max.		
A		9.50		0.374	1 - The lead diameter $\Delta$ D is not controlled over zone E	
B	25.40		1.000		2 - The minimum axial length within which the device may be placed with its leads bent at right angles is 0.59"(15 mm)	
$\Delta$ C		5.30		0.209		
$\Delta$ D		1.30		0.051		
E		1.25		0.049		

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
1N582x	Part number cathode ring	DO-201AD	1.12g	600	Ammopack
1N582xRL	Part number cathode ring	DO-201AD	1.12g	1900	Tape & reel

- EPOXY MEETS UL94,VO

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied.  
STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2003 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany  
Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore  
Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)