


EC45A 45mm Size Ring Type

Large ring, heavy torque device perfect for large ring knob design



Encoders

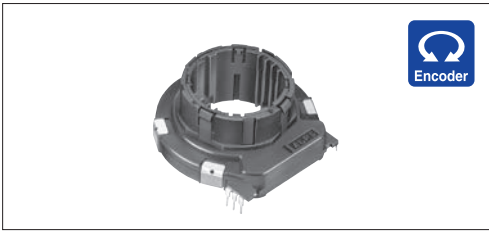

Typical Specifications

Items	Specifications
Rating(max.)	0.5mA 5V DC
Operating life	30,000 cycles
Operating temperature range	-40°C to +85°C

Product Line

Output code	Positions	Rotational angle	Detent torque (mN·m)	Minimum order unit (pcs.)		Product No.
				Japan	Export	
5bit Gray code	31	240°	36±16	280	560	EC45AG520402

Note

Other varieties are also available. Please inquire.

Packing Specifications

Tray

Number of packages (pcs.)		Export package measurements (mm)
1 case /Japan	1 case /export packing	
280	560	525×375×477













Dimensions

Style	PC board mounting hole dimensions (Viewed from mounting side)

Standard Codes (Number of Positions : 31)

Code	Terminal	Position																														
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Gray	4	●	●			●	●			●	●			●	●			●	●			●	●			●	●			●	●	
	2		●	●	●	●					●	●	●	●					●	●	●	●					●	●	●	●		
	3				●	●	●	●	●	●	●	●	●									●	●	●	●	●	●	●	●	●	●	
	5								●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●							
	6																●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

- The ● marks shows the ON position.
- The ● marks : Connections between terminals and the common terminal (terminal No. =1) are ON.

Type		Ring type					
		35mm size		40mm size	45mm size	50mm size	60mm size
Series		EC35CH	EC35B	EC40A	EC45A	EC50A	EC60B
Photo							
Output		Incremental (Three phase A, B and C)	Incremental (Two phase A and B) /Self-return switch	Incremental (Two phase A and B)	Absolute type	Incremental (Two phase A and B)	
Shaft types		Ring type					
Number of pulse / Number of detent		6×ABC/18	15/30	15/30	31 positions	9/18	15/30
Dimensions (mm)	W	35.2	35	40.4	44.5	50.8	62.4
	D	36	37	43	45	50	60
	H	4.5	12.1	9		6.5	7.5
Operating temperature range		-40°C to +90°C		-40°C to +85°C			
Operating life		50,000 cycles		30,000 cycles		40,000 cycles	
Automotive use		●	●	●	●	●	●
Life cycle (availability)							
Electrical performance	Rating	10mA 5V DC		0.5mA 5V DC		1mA 5V DC	10mA 5V DC
	Max./min. operating current (Resistive load)	10mA / 1mA		—	—	—	—
	Insulation resistance	100MΩ min. 250V DC		10MΩ min. 50V DC		10MΩ min. 250V DC	100MΩ min. 250V DC
	Voltage proof	300V AC for 1minute or 360V AC for 1s		50V AC for 1 minute	50V AC for 1 minute or 60V AC for 2s		300V AC for 1 minute or 360V AC for 1s
Mechanical performance	Detent torque	22±11mN·m (Initial) 18±7mN·m (After reflow)	20±10mN·m	20±11mN·m 40±16mN·m	36±16mN·m	40±14mN·m	40±10mN·m
	Push-pull strength	Push	100N				
		Pull	100N	50N		100N	
Shaft configuration		Ring type					
Terminal type		Insertion					
Switch Specifications	Switch type	—	Self-return switch	—	—	—	—
	Contact arrangement	—	Single pole and double throw	—	—	—	—
	Travel (mm)	—	2.8±0.5	—	—	—	—
	Operating force (N)	—	3.8±1.5	—	—	—	—
	Switch ON position	—	15°±5°	—	—	—	—
	Rotational torque	—	40±25mN·m	—	—	—	—
	Rating	—	10mA 5V DC	—	—	—	—
	Contact resistance	—	200mΩ max.	—	—	—	—
	Operating life	—	15,000 cycles	—	—	—	—
Page		308	310	311	312	313	314

Encoders Soldering Conditions 315

Encoders Cautions 316

Note

● Indicates applicability to all products in the series.

Reference for Manual Soldering


Series	Tip temperature	Soldering time	No. of solders
EC05E, EC09E, EC10E, EC111, EC11B, EC11E, EC11G, EC11K, EC12D, EC12E, EC18A, EC21A, EC28A, EC35A, EC35AH, EC35B, EC40A, EC45A, EC50A, EC60B, EM11B, EM20B, EC21C, EC28C, EC35CH	350°C max.	3s max.	1 time
EC11J	350±10°C	3 ⁺¹ ₀ s	2 times

Reference for Dip Soldering

Series	Preheating		Dip soldering		No. of solders
	Soldering surface temperature	Heating time	Soldering temperature	Soldering time	
EC09E, EC11B, EC111, EC11E, EC11G, EC11K, EC18A, EC21A, EC28A, EC35A, EC35AH, EC35B, EC50A, EC60B	100°C max.	2 min. max.	260±5°C	5±1s	2 times max.
EC10E, EC12D, EC12E, EM11B	100°C max.	1 min. max.	260±5°C	3±1s	2 times max.
EC40A	110°C max.	1 min. max.	260°C max.	10s max.	1 time
EC45A	100°C max.	2 min. max.	260°C max.	5s max.	2 times max.
EM20B	80°C max.	1 min. max.	260°C max.	3s max.	2 times max.

Example of Reflow Soldering Condition

Temperature profile

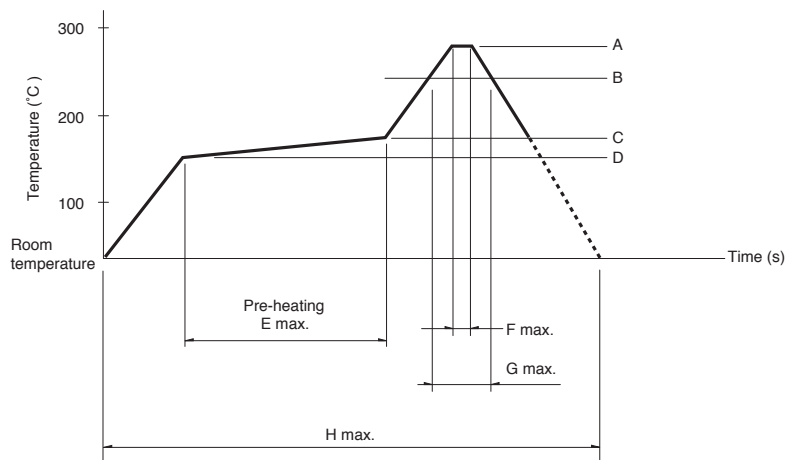

Series	A	B	C	D	E	F	G	H	No. of reflows
EC11J	260°C	230°C	180°C	150°C	2 min. max.	3s	40s	4 min. max.	2 times max.
EC05E	250°C min.	230°C min.	180°C	150°C	60s to 120s	—	30s to 40s	—	2 times max.
EC21C	230°C to 245°C	220°C	200°C	150°C	60s to 120s	—	25s to 60s	300s max.	1 time max.
EC28C, EC35CH	260°C	230°C	180°C	150°C	2 min. min.	3s	40s	230s max.	1 time max.

注記

- When using an infrared reflow oven, solder may sometimes not be applied. Be sure to use a hot air reflow oven or a type that uses infrared rays in combination with hot air.
- The temperatures given above are the maximum temperatures at the terminals of the encoder when employing a hot air reflow method. The temperature of the PC board and the surface temperature of the encoder may vary greatly depending on the PC board material, its size and thickness. Ensure that the surface temperature of the encoder does not rise to 250°C or greater.
- Conditions vary to some extent depending on the type of reflow bath used. Be sure to give due consideration to this prior to use.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru