



## SERIES: PSK-15B | DESCRIPTION: AC-DC POWER SUPPLY

### FEATURES


- up to 15 W continuous power
- universal input: 85~264 Vac
- compact encapsulated design
- single output from 5 Vdc ~ 48 Vdc
- short circuit, over voltage protection, over current protection
- 4000 Vac isolation
- no load power consumption <100 mW



| MODEL       | output<br>voltage<br>(Vdc) | output<br>current<br>max<br>(A) | output<br>power<br>max<br>(W) | ripple<br>and noise <sup>1</sup><br>typ<br>(mVp-p) | efficiency<br>typ<br>(%) |
|-------------|----------------------------|---------------------------------|-------------------------------|----------------------------------------------------|--------------------------|
| PSK-15B-S5  | 5                          | 2.8                             | 14                            | 100                                                | 81.37                    |
| PSK-15B-S9  | 9                          | 1.6                             | 14.4                          | 100                                                | 84.28                    |
| PSK-15B-S12 | 12                         | 1.25                            | 15                            | 120                                                | 84.50                    |
| PSK-15B-S15 | 15                         | 1                               | 15                            | 150                                                | 84.50                    |
| PSK-15B-S24 | 24                         | 0.625                           | 15                            | 240                                                | 84.50                    |
| PSK-15B-S48 | 48                         | 0.32                            | 15.4                          | 480                                                | 84.63                    |

Notes: 1. At full load, nominal input, 20 MHz bandwidth oscilloscope, output terminated with 10  $\mu$ F electrolytic and 0.1  $\mu$ F ceramic capacitors.  
2. All specifications are measured at Ta=25°C, nominal input voltage, and 75% rated output load unless otherwise specified.

### PART NUMBER KEY

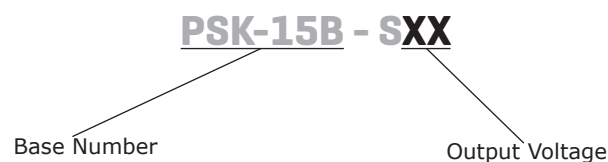

## INPUT

| parameter                 | conditions/description       | min       | typ | max        | units      |
|---------------------------|------------------------------|-----------|-----|------------|------------|
| voltage                   |                              | 85<br>120 |     | 264<br>370 | Vac<br>Vdc |
| frequency                 |                              | 47        |     | 63         | Hz         |
| current                   |                              |           |     | 0.4        | A          |
| inrush current            | at 240 Vac, 25°C, cold start |           |     | 60         | A          |
| leakage current           |                              |           |     | 0.25       | mA         |
| no load power consumption |                              |           |     | 0.10       | W          |

## OUTPUT

| parameter                  | conditions/description             | min | typ   | max   | units |
|----------------------------|------------------------------------|-----|-------|-------|-------|
| capacitive load            | 5 Vdc output model                 |     |       | 2,800 | μF    |
|                            | 9 Vdc output model                 |     |       | 1,600 | μF    |
|                            | 12 Vdc output model                |     |       | 1,250 | μF    |
|                            | 15 Vdc output model                |     |       | 1,000 | μF    |
|                            | 24 Vdc output model                |     |       | 625   | μF    |
|                            | 48 Vdc output model                |     |       | 320   | μF    |
| initial set point accuracy | at full load, 25°C                 |     | ±2    |       | %     |
| line regulation            | high line to low line at full load |     | ±0.5  |       | %     |
| load regulation            | 10%~100% load                      |     | ±1    |       | %     |
| hold-up time               | at 115 Vac                         |     | 12    |       | ms    |
| switching frequency        |                                    |     | 65    |       | kHz   |
| temperature coefficient    |                                    |     | ±0.05 |       | %/°C  |

## PROTECTIONS

| parameter                | conditions/description | min | typ | max | units |
|--------------------------|------------------------|-----|-----|-----|-------|
| over voltage protection  | hiccup, auto recovery  |     |     |     |       |
| over current protection  |                        | 110 |     |     | %     |
| short circuit protection | hiccup, auto recovery  |     |     |     |       |

## SAFETY & COMPLIANCE

| parameter         | conditions/description                                                                                              | min     | typ   | max | units |
|-------------------|---------------------------------------------------------------------------------------------------------------------|---------|-------|-----|-------|
| isolation voltage | input to output                                                                                                     |         | 4,000 |     | Vac   |
| safety approvals  | IEC62368-1/60950-1, UL62368-1/60950-1                                                                               |         |       |     |       |
| safety class      | class II                                                                                                            |         |       |     |       |
| EMI/EMC           | EN 55032 Class B, FCC Part 15 Class B, EN 61000-6-3, EN 61000-3-2, EN 61000-3-3, EN 55024, EN 61204-3, EN 61000-6-1 |         |       |     |       |
| MTBF              | as per MIL-STD-217F, at 115 Vac, 25°C, GB                                                                           | 300,000 |       |     | hours |
| life time         | at 40°C, 75% load                                                                                                   | 3       |       |     | years |
| RoHS              | yes                                                                                                                 |         |       |     |       |


## ENVIRONMENTAL

| parameter             | conditions/description | min | typ  | max | units |
|-----------------------|------------------------|-----|------|-----|-------|
| operating temperature | see derating curve     | -25 |      | 70  | °C    |
| storage temperature   |                        | -40 |      | 85  | °C    |
| operating humidity    | non-condensing         |     |      | 93  | %     |
| operating altitude    |                        |     | 5000 |     | m     |

## SOLDERABILITY

| parameter      | conditions/description     | min | typ | max | units |
|----------------|----------------------------|-----|-----|-----|-------|
| wave soldering | see wave soldering profile |     |     | 260 | °C    |

- Notes:
1. Soldering materials: Sn/Cu/Ni
  2. Ramp up rate during preheat: 1.4°C/s (from 50°C to 100°C)
  3. Soaking temperature: 0.5°C/s (from 100°C to 130°C), 60±20 seconds
  4. Peak temperature: 260°C, above 250°C for 3~6 seconds
  5. Ramp down rate during cooling: -10°C/s (from 260°C to 150°C)

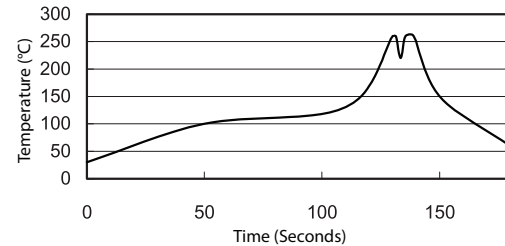

## MECHANICAL



| parameter  | conditions/description                           | min | typ | max | units |
|------------|--------------------------------------------------|-----|-----|-----|-------|
| dimensions | 2.440 x 1.770 x 0.909 (61.98 x 44.96 x 23.09 mm) |     |     |     | inch  |
| weight     |                                                  |     | 104 |     | g     |
| cooling    | natural convection                               |     |     |     |       |

## MECHANICAL DRAWING


units: inch [mm]

tolerance: X.XXX = ±0.020 [±0.50]

| PIN CONNECTIONS |          |
|-----------------|----------|
| PIN             | Function |
| 1               | ACN      |
| 2               | ACL      |
| 3               | -Vout    |
| 4               | +Vout    |

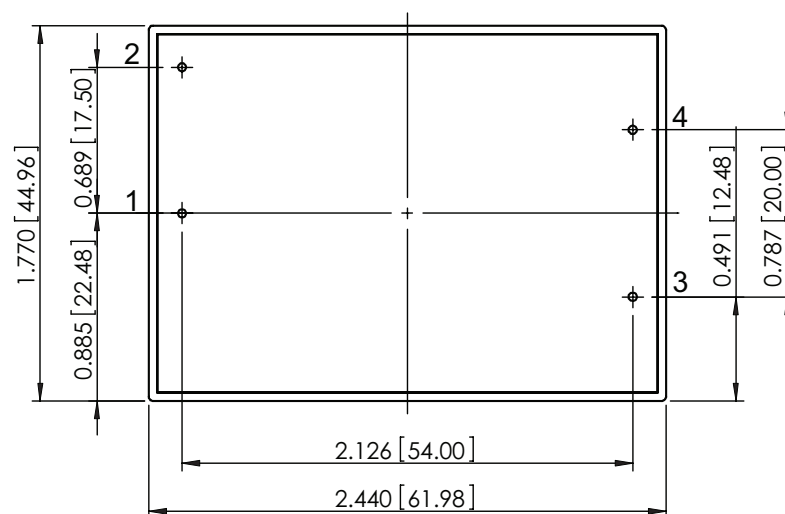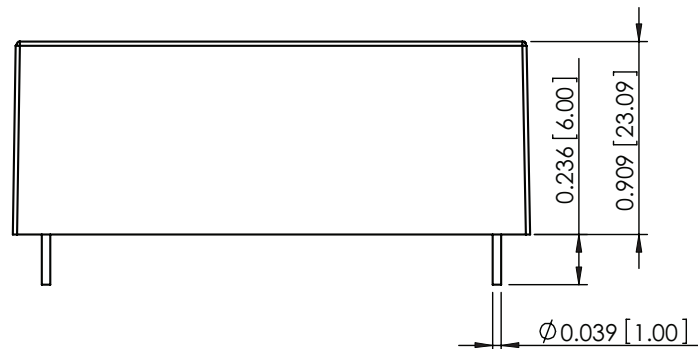


## DERATING CURVE

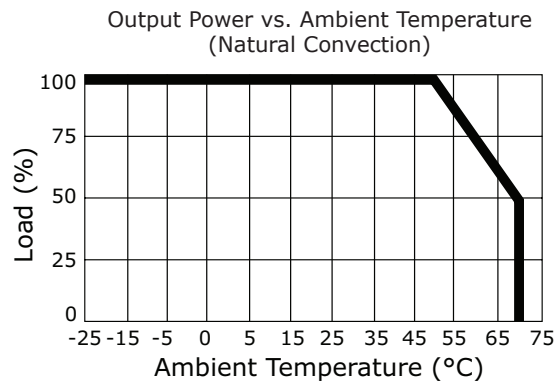


## EFFICIENCY CURVES


5 Vdc Output Efficiency Curve  
(at 25°C)

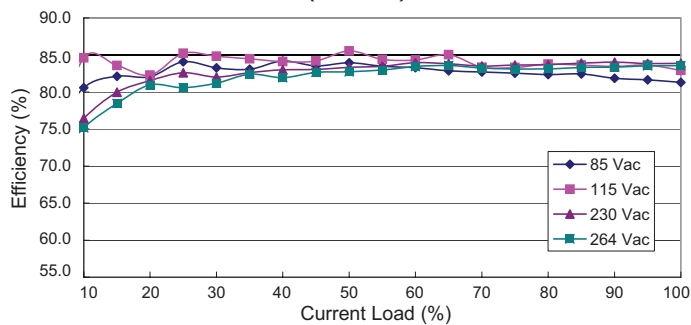


9 Vdc Output Efficiency Curve  
(at 25°C)

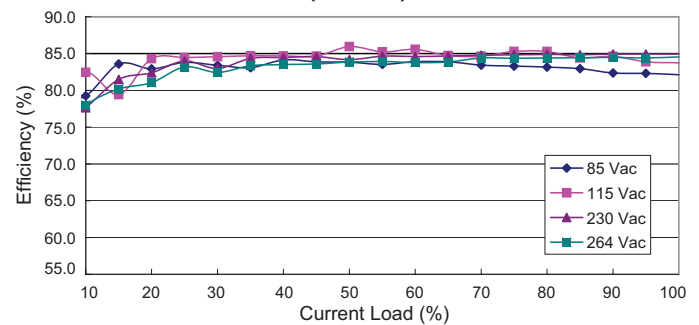


12 Vdc Output Efficiency Curve  
(at 25°C)

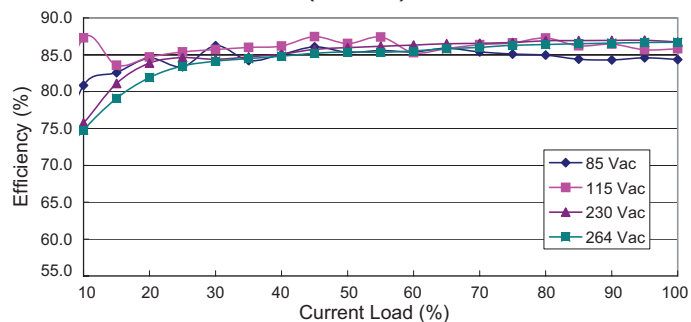


15 Vdc Output Efficiency Curve  
(at 25°C)

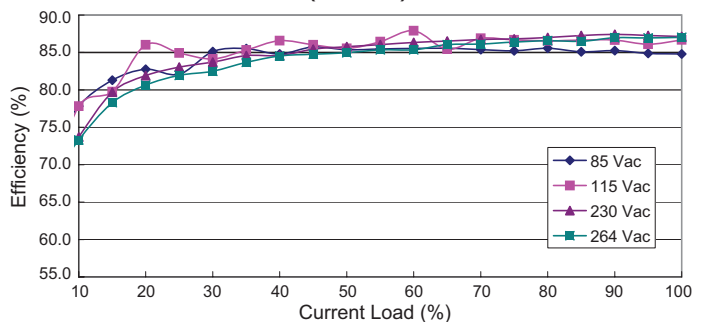

24 Vdc Output Efficiency Curve  
(at 25°C)

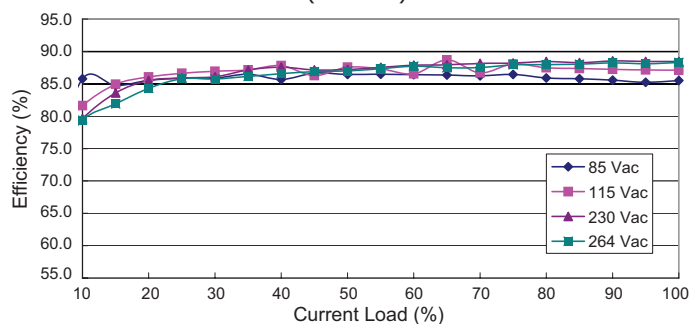

48 Vdc Output Efficiency Curve  
(at 25°C)

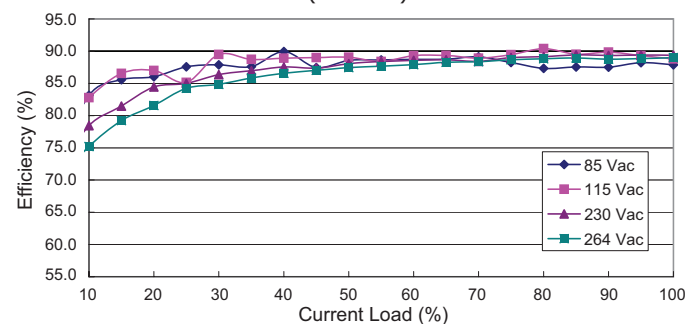

## REVISION HISTORY

| rev. | description                  | date       |
|------|------------------------------|------------|
| 1.0  | initial release              | 02/23/2017 |
| 1.01 | increased operating altitude | 02/05/2018 |
| 1.02 | updated datasheet            | 01/08/2019 |

The revision history provided is for informational purposes only and is believed to be accurate.



**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)