

### Low-Power Linear Active Thermistor<sup>TM</sup> ICs

### **Features**

- · Tiny Analog Temperature Sensor
- · Available Packages:
  - SC70-5, SOT-23-5, TO-92-3
- · Wide Temperature Measurement Range:
  - -40°C to +125°C (Extended Temperature)
  - 40°C to +150°C (High Temperature) (MCP9700/9700A)
- Accuracy:
  - ±2°C (max.), 0°C to +70°C (MCP9700A/9701A)
  - ±4°C (max.), 0°C to +70°C (MCP9700/9701)
- Optimized for Analog-to-Digital Converters (ADCs):
  - 10.0 mV/°C (typical) MCP9700/9700A
  - 19.5 mV/°C (typical) MCP9701/9701A
- · Wide Operating Voltage Range:
  - $V_{DD}$  = 2.3V to 5.5V MCP9700/9700A
  - V<sub>DD</sub> = 3.1V to 5.5V MCP9701/9701A
- Low Operating Current: 6 µA (typical)
- · Optimized to Drive Large Capacitive Loads

### **Typical Applications**

- · Hard Disk Drives and Other PC Peripherals
- · Entertainment Systems
- · Home Appliance
- · Office Equipment
- · Battery Packs and Portable Equipment
- · General Purpose Temperature Monitoring

### **Description**


The MCP9700/9700A and MCP9701/9701A family of Linear Active Thermistor  $^{TM}$  Intergrated Circuit (IC) is an analog temperature sensor that converts temperature to analog voltage. It's a low-cost, low-power sensor with an accuracy of  $\pm 2^{\circ}\text{C}$  from 0°C to  $\pm 70^{\circ}\text{C}$  (MCP9700A/9701A)  $\pm 4^{\circ}\text{C}$  from 0°C to  $\pm 70^{\circ}\text{C}$  (MCP9700/9701) while consuming 6  $\mu\text{A}$  (typical) of operating current.

Unlike resistive sensors (such as thermistors), the Linear Active Thermistor IC does not require an additional signal-conditioning circuit. Therefore, the biasing circuit development overhead for thermistor solutions can be avoided by implementing this low-cost device. The voltage output pin ( $V_{OUT}$ ) can be directly connected to the ADC input of a microcontroller. The MCP9700/9700A and MCP9701/9701A temperature coefficients are scaled to provide a 1°C/bit resolution for an 8-bit ADC with a reference voltage of 2.5V and 5V, respectively.

The MCP9700/9700A and MCP9701/9701A provide a low-cost solution for applications that require measurement of a relative change of temperature. When measuring relative change in temperature from +25°C, an accuracy of ±1°C (typical) can be realized from 0°C to +70°C. This accuracy can also be achieved by applying system calibration at +25°C.

In addition, this family is immune to the effects of parasitic capacitance and can drive large capacitive loads. This provides Printed Circuit Board (PCB) layout design flexibility by enabling the device to be remotely located from the microcontroller. Adding some capacitance at the output also helps the output transient response by reducing overshoots or undershoots. However, capacitive load is not required for sensor output stability.

### **Package Type**

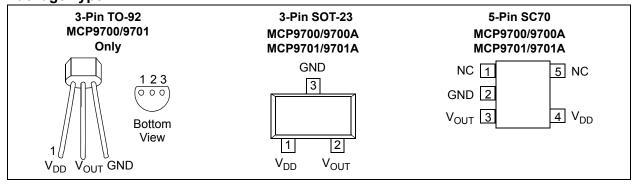

# 1.0 ELECTRICAL CHARACTERISTICS

### **Absolute Maximum Ratings †**

V <sub>DD</sub> :	6.0V
Storage temperature:	-65°C to +150°C
Ambient Temp. with Power Applied:	-40°C to +150°C
Output Current	±30 mA
Junction Temperature (T <sub>J</sub> ):	150°C
ESD Protection On All Pins (HBM:MM	И):(4 kV:200V)
Latch-Up Current at Each Pin:	±200 mA

**†Notice:** Stresses above those listed under "Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

### DC ELECTRICAL CHARACTERISTICS

Electrical Specifications: Unless otherwise indicated:

MCP070007700A: V = 2.3V to 5.5V CND = Crowd T = 40°C to 1435°

**MCP9700/9700A:**  $V_{DD}$  = 2.3V to 5.5V, GND = Ground,  $T_A$  = -40°C to +125°C and No load. **MCP9701/9701A:**  $V_{DD}$  = 3.1V to 5.5V, GND = Ground,  $T_A$  = -10°C to +125°C and No load.

<b>MCP9701/9701A:</b> $V_{DD}$ = 3.1V to 5.5V, GND = Ground, $T_A$ = -10°C to +125°C and No load.							
Parameter	Sym	Min	Тур	Max	Unit	Conditions	
Power Supply							
Operating Voltage Range	V <sub>DD</sub> V <sub>DD</sub>	2.3 3.1	_	5.5 5.5	V V	MCP9700/9700A MCP9701/9701A	
Operating Current	I <sub>DD</sub>	_	6	12	μA		
Power Supply Rejection	$\Delta$ °C/ $\Delta$ V <sub>DD</sub>	_	0.1	_	°C/V		
Sensor Accuracy (Notes 1, 2)							
$T_A = +25$ °C	T <sub>ACY</sub>	_	±1	_	°C		
T <sub>A</sub> = 0°C to +70°C	T <sub>ACY</sub>	-2.0	±1	+2.0	°C	MCP9700A/9701A	
$T_A = -40^{\circ}C \text{ to } +125^{\circ}C$	T <sub>ACY</sub>	-2.0	±1	+4.0	°C	MCP9700A	
T <sub>A</sub> = -10°C to +125°C	T <sub>ACY</sub>	-2.0	±1	+4.0	°C	MCP9701A	
$T_A = 0$ °C to +70°C	T <sub>ACY</sub>	-4.0	±2	+4.0	°C	MCP9700/9701	
$T_A = -40^{\circ}C \text{ to } +125^{\circ}C$	T <sub>ACY</sub>	-4.0	±2	+6.0	°C	MCP9700	
T <sub>A</sub> = -10°C to +125°C	T <sub>ACY</sub>	-4.0	±2	+6.0	°C	MCP9701	
$T_A = -40^{\circ}C \text{ to } +150^{\circ}C$	T <sub>ACY</sub>	-4.0	±2	+6.0	°C	High Temperature, MCP9700 only	
Sensor Output	'			•	•		
Output Voltage, T <sub>A</sub> = 0°C	V <sub>0°C</sub>	_	500	_	mV	MCP9700/9700A	
Output Voltage, T <sub>A</sub> = 0°C	V <sub>0°C</sub>	_	400	_	mV	MCP9701/9701A	
Temperature Coefficient	T <sub>C</sub>	_	10.0	_	mV/°C	MCP9700/9700A	
	T <sub>C</sub>	_	19.5	_	mV/°C	MCP9701/9701A	
Output Non-linearity	V <sub>ONL</sub>	_	±0.5	_	°C	$T_A = 0^{\circ}C \text{ to } +70^{\circ}C \text{ (Note 2)}$	
Output Current	I <sub>OUT</sub>	_	_	100	μA		
Output Impedance	Z <sub>OUT</sub>		20		Ω	I <sub>OUT</sub> = 100 μA, f = 500 Hz	
Output Load Regulation	ΔV <sub>OUT</sub> / ΔΙ <sub>ΟUT</sub>	_	1	_	Ω	$T_A = 0$ °C to +70°C, $I_{OUT} = 100 \mu A$	
Turn-on Time	t <sub>ON</sub>	_	800	_	μs		

- Note 1: The MCP9700/9700A family accuracy is tested with  $V_{DD}$  = 3.3V, while the MCP9701/9701A accuracy is tested with  $V_{DD}$  = 5.0V.
  - 2: The MCP9700/9700A and MCP9701/9701A family is characterized using the first-order or linear equation, as shown in Equation 4-2. Also refer to Figure 2-16.
  - **3:** SC70-5 package thermal response with 1x1 inch, dual-sided copper clad, TO-92-3 package thermal response without PCB (leaded).

### DC ELECTRICAL CHARACTERISTICS (CONTINUED)

Electrical Specifications: Unless otherwise indicated:

**MCP9700/9700A:**  $V_{DD}$  = 2.3V to 5.5V, GND = Ground,  $T_A$  = -40°C to +125°C and No load. **MCP9701/9701A:**  $V_{DD}$  = 3.1V to 5.5V, GND = Ground,  $T_A$  = -10°C to +125°C and No load.

Parameter	Sym	Min	Тур	Max	Unit	Conditions
Typical Load Capacitance	C <sub>LOAD</sub>	_		1000	pF	The MCP9700/9700A and MCP9701/9701A family is characterized and production tested with a capacitive load of 1000 pF.
SC-70 Thermal Response to 63%	t <sub>RES</sub>	_	1.3		s	30°C (Air) to +125°C
TO-92 Thermal Response to 63%	t <sub>RES</sub>	_	1.65	_	S	(Fluid Bath) (Note 3)

- Note 1: The MCP9700/9700A family accuracy is tested with  $V_{DD}$  = 3.3V, while the MCP9701/9701A accuracy is tested with  $V_{DD}$  = 5.0V.
  - 2: The MCP9700/9700A and MCP9701/9701A family is characterized using the first-order or linear equation, as shown in Equation 4-2. Also refer to Figure 2-16.
  - **3:** SC70-5 package thermal response with 1x1 inch, dual-sided copper clad, TO-92-3 package thermal response without PCB (leaded).

### TEMPERATURE CHARACTERISTICS

**Electrical Specifications:** Unless otherwise indicated:

**MCP9700/9700A:**  $V_{DD}$  = 2.3V to 5.5V, GND = Ground,  $T_A$  = -40°C to +125°C and No load. **MCP9701/9701A:**  $V_{DD}$  = 3.1V to 5.5V, GND = Ground,  $T_A$  = -10°C to +125°C and No load.

Parameters	Sym	Min	Тур	Max	Units	Conditions
Temperature Ranges						
Specified Temperature Range (Note 1)	T <sub>A</sub>	-40	_	+125	°C	MCP9700/9700A
	T <sub>A</sub>	-10	_	+125	°C	MCP9701/9701A
	T <sub>A</sub>	-40	_	+150	°C	High Temperature, MCP9700 only
Operating Temperature Range	T <sub>A</sub>	-40	_	+125	°C	Extended Temperature
	T <sub>A</sub>	-40	_	+150	°C	High Temperature
Storage Temperature Range	T <sub>A</sub>	-65	_	+150	°C	
Thermal Package Resistances						
Thermal Resistance, 5LD SC70	$\theta_{JA}$	_	331	_	°C/W	
Thermal Resistance, 3LD SOT-23	$\theta_{\sf JA}$	_	308	_	°C/W	
Thermal Resistance, 3LD TO-92	$\theta_{\sf JA}$	_	146	_	°C/W	

Note 1: Operation in this range must not cause T<sub>.1</sub> to exceed Maximum Junction Temperature (+150°C).

### 2.0 TYPICAL PERFORMANCE CURVES

**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

**Note:** Unless otherwise indicated, **MCP9700/9700A**:  $V_{DD}$  = 2.3V to 5.5V; **MCP9701/9701A**:  $V_{DD}$  = 3.1V to 5.5V; GND = Ground,  $C_{bypass}$  = 0.1  $\mu$ F.





FIGURE 2-1: Accuracy vs. Ambient Temperature (MCP9700A/9701A).



**FIGURE 2-2:** Accuracy vs. Ambient Temperature, with  $V_{DD}$ .




FIGURE 2-3: Supply Current vs. Temperature.




FIGURE 2-4: Accuracy vs. Ambient Temperature (MCP9700/9701).






FIGURE 2-5: Changes in Accuracy vs. Ambient Temperature (Due to Load).



**FIGURE 2-6:** Load Regulation vs. Ambient Temperature.

**Note:** Unless otherwise indicated, **MCP9700/9700A**:  $V_{DD}$  = 2.3V to 5.5V; **MCP9701/9701A**:  $V_{DD}$  = 3.1V to 5.5V; GND = Ground,  $C_{bypass}$  = 0.1  $\mu$ F.



**FIGURE 2-7:** Output Voltage at 0°C (MCP9700/9700A).





FIGURE 2-8: Occurrences vs. Temperature Coefficient (MCP9700/9700A).



**FIGURE 2-9:** Power Supply Rejection  $(\Delta^{\circ}C/\Delta V_{DD})$  vs. Ambient Temperature.




FIGURE 2-10: Output Voltage at 0°C (MCP9701/9701A).






FIGURE 2-11: Occurrences vs.
Temperature Coefficient (MCP9701/9701A).




**FIGURE 2-12:** Power Supply Rejection  $(\Delta^{\circ}C/\Delta V_{DD})$  vs. Temperature.


**Note:** Unless otherwise indicated, **MCP9700/9700A**:  $V_{DD}$  = 2.3V to 5.5V; **MCP9701/9701A**:  $V_{DD}$  = 3.1V to 5.5V; GND = Ground,  $C_{bvpass}$  = 0.1  $\mu$ F.




**FIGURE 2-13:** Output Voltage vs. Power Supply.




**FIGURE 2-14:** Output vs. Settling Time to step  $V_{DD}$ .




**FIGURE 2-15:** Thermal Response (Air to Fluid Bath).



**FIGURE 2-16:** Output Voltage vs. Ambient Temperature.



**FIGURE 2-17:** Output vs. Settling Time to Ramp  $V_{DD}$ .



**FIGURE 2-18:** Output Impedance vs. Frequency.

### 3.0 PIN DESCRIPTIONS

The descriptions of the pins are listed Table 3-1.

TABLE 3-1: PIN FUNCTION TABLE

Pin No. SC70	Pin No. SOT-23	Pin No. TO-92	Symbol	Function	
1	_	_	NC	No Connect (this pin is not connected to the die).	
2	3	3	GND	Power Ground Pin	
3	2	2	V <sub>OUT</sub> Output Voltage Pin		
4	1	1	V <sub>DD</sub> Power Supply Input		
5	_	_	NC		

### 3.1 Power Ground Pin (GND)

GND is the system ground pin.

### 3.2 Output Voltage Pin (V<sub>OUT</sub>)

The sensor output can be measured at  $V_{OUT}$ . The voltage range over the operating temperature range for the MCP9700/9700A is 100 mV to 1.75V and for the MCP9701/9701A, 200 mV to 3V .

### 3.3 Power Supply Input (V<sub>DD</sub>)

The operating voltage as specified in the "DC Electrical Characteristics" table is applied to  $V_{DD}$ .

### 3.4 No Connect Pin (NC)

This pin is not connected to the die. It can be used to improve thermal conduction to the package by connecting it to a Printed Circuit Board (PCB) trace from the thermal source.

### 4.0 APPLICATIONS INFORMATION

The Linear Active Thermistor™ IC uses an internal diode to measure temperature. The diode electrical characteristics have a temperature coefficient that provides a change in voltage based on the relative ambient temperature from -40°C to 150°C. The change in voltage is scaled to a temperature coefficient of 10.0 mV/°C (typical) for the MCP9700/9700A and 19.5 mV/°C (typical) for the MCP9701/9701A. The output voltage at 0°C is also scaled to 500 mV (typical) and 400 mV (typical) for the MCP9700/9700A and MCP9701/9701A, respectively. This linear scale is described in the first-order transfer function shown in Equation 4-1 and Figure 2-16.

### EQUATION 4-1: SENSOR TRANSFER FUNCTION

 $V_{OUT} = T_C \bullet T_A + V_{0 \circ C}$ 

Where:

T<sub>A</sub> = Ambient Temperature

V<sub>OUT</sub> = Sensor Output Voltage

V<sub>0°C</sub> = Sensor Output Voltage at 0°C

(See DC Electrical Characteristics

table)

 $T_C$  = Temperature Coefficient

(See DC Electrical Characteristics

table)





FIGURE 4-1: Typical Application Circuit.

### 4.1 Improving Accuracy

The MCP9700/9700A and MCP9701/9701A accuracy can be improved by performing a system calibration at a specific temperature. For example, calibrating the system at  $+25^{\circ}$ C ambient improves the measurement accuracy to a  $\pm 0.5^{\circ}$ C (typical) from 0°C to  $+70^{\circ}$ C, as shown in Figure 4-2. Therefore, when measuring relative temperature change, this family measures temperature with higher accuracy.



**FIGURE 4-2:** Relative Accuracy to +25°C vs. Temperature.

The change in accuracy from the calibration temperature is due to the output non-linearity from the first-order equation, as specified in Equation 4-2. The accuracy can be further improved by compensating for the output non-linearity.

For higher accuracy using a sensor compensation technique, refer to AN1001 "IC Temperature Sensor Accuracy Compensation with a PICmicro® Microcontroller" (DS01001). The application note shows that if the MCP9700 is compensated in addition to room temperature calibration, the sensor accuracy can be improved to ±0.5°C (typical) accuracy over the operating temperature (Figure 4-3).




FIGURE 4-3: MCP9700/9700A Calibrated Sensor Accuracy.

The compensation technique provides a linear temperature reading. A firmware look-up table can be generated to compensate for the sensor error.

# 4.2 Shutdown Using Microcontroller I/O Pin

The MCP9700/9700A and MCP9701/9701A family of low operating current of 6  $\mu A$  (typical) makes it ideal for battery-powered applications. However, for applications that require tighter current budget, this device can be powered using a microcontroller Input/ Output (I/O) pin. The I/O pin can be toggled to shut down the device. In such applications, the microcontroller internal digital switching noise is emitted to the MCP9700/9700A and MCP9701/9701A as power supply noise. This switching noise compromises measurement accuracy. Therefore, a decoupling capacitor and series resistor will be necessary to filter out the system noise.

### 4.3 Layout Considerations

The MCP9700/9700A and MCP9701/9701A family does not require any additional components to operate. However, it is recommended that a decoupling capacitor of 0.1  $\mu F$  to 1  $\mu F$  be used between the  $V_{DD}$  and GND pins. In high-noise applications, connect the power supply voltage to the  $V_{DD}$  pin using a  $200\Omega$  resistor with a 1  $\mu F$  decoupling capacitor. A high frequency ceramic capacitor is recommended. It is necessary for the capacitor to be located as close as possible to the  $V_{DD}$  and GND pins in order to provide effective noise protection. In addition, avoid tracing digital lines in close proximity to the sensor.

#### 4.4 Thermal Considerations

The MCP9700/9700A and MCP9701/9701A family measures temperature by monitoring the voltage of a diode located in the die. A low-impedance thermal path between the die and the PCB is provided by the pins. Therefore, the sensor effectively monitors the temperature of the PCB. However, the thermal path for the ambient air is not as efficient because the plastic device package functions as a thermal insulator from the die. This limitation applies to plastic-packaged silicon temperature sensors. If the application requires measuring ambient air, consider using the TO-92 package.

The MCP9700/9700A and MCP9701/9701A is designed to source/sink 100  $\mu$ A (max.). The power dissipation due to the output current is relatively insignificant. The effect of the output current can be described using Equation 4-2.

### EQUATION 4-2: EFFECT OF SELF-HEATING

 $T_J - T_A = \theta_{JA} (V_{DD} I_{DD} + (V_{DD} - V_{OUT}) I_{OUT})$ 

Where:

 $T_J$  = Junction Temperature

 $T_A$  = Ambient Temperature

 $\theta_{JA}$  = Package Thermal Resistance

(331°C/W)

V<sub>OUT</sub> = Sensor Output Voltage

I<sub>OUT</sub> = Sensor Output Current


I<sub>DD</sub> = Operating Current

V<sub>DD</sub> = Operating Voltage


At  $T_A$  = +25°C ( $V_{OUT}$  = 0.75V) and maximum specification of  $I_{DD}$  = 12  $\mu$ A,  $V_{DD}$  = 5.5V and  $I_{OUT}$  = +100  $\mu$ A, the self-heating due to power dissipation ( $T_J - T_A$ ) is 0.179°C.

#### 5.0 PACKAGING INFORMATION


#### 5.1 **Package Marking Information**




Device	Code
MCP9700T	AENN
MCP9700AT	AFNN
MCP9701T	AMNN
MCP9701AT	APNN
Note: Applies to 3-Lea	ad SOT-23




3-Lead TO-92








5-Lead SC70



Device	Code
MCP9700T	AUNN
MCP9700AT	AXNN
MCP9701T	AVNN
MCP9701AT	AYNN



Note: Applies to 5-Lead SC70.

Legend: XX...X Customer-specific information

Year code (last digit of calendar year) YY Year code (last 2 digits of calendar year) ww Week code (week of January 1 is week '01')

NNN Alphanumeric traceability code

Pb-free JEDEC designator for Matte Tin (Sn) (e3)

This package is Pb-free. The Pb-free JEDEC designator (@3)


can be found on the outer packaging for this package.

In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available

characters for customer-specific information.

### 5-Lead Plastic Small Outline Transistor (LT) [SC70]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

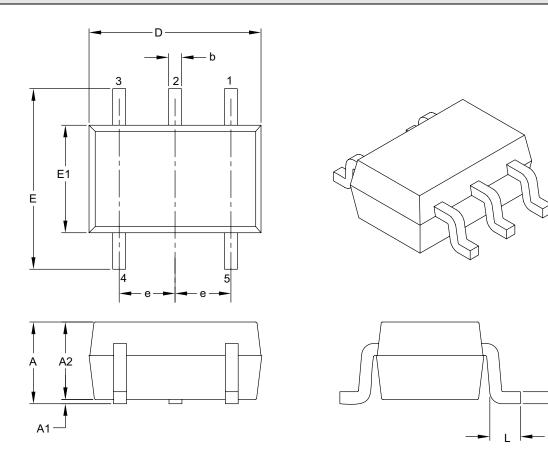

	Units			3	
Dimension	Dimension Limits			MAX	
Number of Pins	N	5			
Pitch	е		0.65 BSC		
Overall Height	Α	0.80	_	1.10	
Molded Package Thickness	A2	0.80	_	1.00	
Standoff	A1	0.00	_	0.10	
Overall Width	Е	1.80	2.10	2.40	
Molded Package Width	E1	1.15	1.25	1.35	
Overall Length	D	1.80	2.00	2.25	
Foot Length	L	0.10	0.20	0.46	
Lead Thickness	С	0.08	_	0.26	
Lead Width	b	0.15	_	0.40	

### Notes:


- 1. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.127 mm per side.
- 2. Dimensioning and tolerancing per ASME Y14.5M.

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-061B

### 5-Lead Plastic Small Outline Transistor (LT) [SC70]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

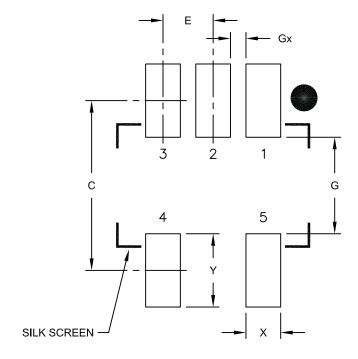

**RECOMMENDED LAND PATTERN** 

	Units	V	<b>IILLIMETER</b>	S
Dimension	Dimension Limits		NOM	MAX
Contact Pitch	Е	0.65 BSC		
Contact Pad Spacing	С		2.20	
Contact Pad Width	Х			0.45
Contact Pad Length	Υ			0.95
Distance Between Pads	G	1.25		
Distance Between Pads	Gx	0.20		

#### Notes:


1. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.


Microchip Technology Drawing No. C04-2061A


### 3-Lead Plastic Small Outline Transistor (TT) [SOT-23]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging









	Units			3	
	Dimension Limits	MIN	NOM	MAX	
Number of Pins	N	3			
Lead Pitch	е		0.95 BSC		
Outside Lead Pitch	e1	1.90 BSC			
Overall Height	A	0.89 –			
Molded Package Thickness	A2	0.79	0.95	1.02	
Standoff	A1	0.01	_	0.10	
Overall Width	E	2.10	_	2.64	
Molded Package Width	E1	1.16	1.30	1.40	
Overall Length	D	2.67	2.90	3.05	
Foot Length	L	0.13	0.50	0.60	
Foot Angle	ф	0°	_	10°	
Lead Thickness	С	0.08	_	0.20	
Lead Width	b	0.30	_	0.54	

#### Notes:


- 1. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25 mm per side.
- 2. Dimensioning and tolerancing per ASME Y14.5M.

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-104B

### 3-Lead Plastic Transistor Outline (TO) [TO-92]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

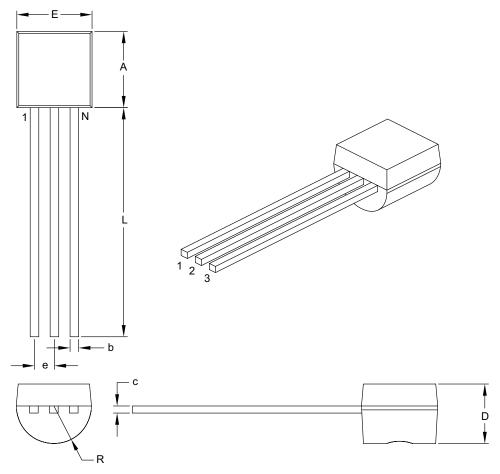

	Units	INC	HES
	Dimension Limits	MIN	MAX
Number of Pins	N	;	3
Pitch	е	.050	BSC
Bottom to Package Flat	D	.125	.165
Overall Width	E	.175	.205
Overall Length	Α	.170	.210
Molded Package Radius	R	.080	.105
Tip to Seating Plane	L	.500	_
Lead Thickness	С	.014	.021
Lead Width	b	.014	.022

#### Notes:

- 1. Dimensions A and E do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .005" per side.
- 2. Dimensioning and tolerancing per ASME Y14.5M.

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-101B

### APPENDIX A: REVISION HISTORY

### Revision E (April 2009)

The following is the list of modifications:

- Added High Temperature option throughout document.
- Updated plots to reflect the high temperature performance.
- 3. Updated Package Outline drawings.
- 4. Updated Revision history.

### **Revision D (October 2007)**

The following is the list of modifications:

- 1. Added the 3-lead SOT-23 devices to data sheet.
- 2. Replaced Figure 2-15.
- 3. Updated Package Outline Drawings.

### Revision C (June 2006)

The following is the list of modifications:

- Added the MCP9700A and MCP9701A devices to data sheet.
- Added TO92 package for the MCP9700/ MCP9701.

### **Revision B (October 2005)**

The following is the list of modifications:

- 1. Added Section 3.0 "Pin Descriptions".
- Added the Linear Active Thermistor™ IC trademark.
- 3. Removed the 2<sup>nd</sup> order temperature equation and the temperature coeficient histogram.
- 4. Added a reference to AN1001 and corresponding verbiage.
- 5. Added Figure 4-2 and corresponding verbiage.

### **Revision A (November 2005)**

· Original Release of this Document.

### PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

PART NO. –	<u>X</u>	<u>xx</u>	Exa	mples:	
	 erature Pac nge	 ckage	a)	MCP9700T-E/LT:	Linear Active Thermistor™ IC, Tape and Reel, 5LD SC70 package.
Г			b)	MCP9700-E/TO:	Linear Active Thermistor™ IC, 3LD TO-92 package.
Device:		Linear Active Thermistor™ IC, Tape and Reel, Pb free Linear Active Thermistor™ IC.	c)	MCP9700T-E/TO:	Linear Active Thermistor™ IC, Tape and Reel, 3LD SOT-23 package.
	MCP9701AT: I	Tape and Reel, Pb free  Linear Active Thermistor™ IC,  Tape and Reel, Pb free  Linear Active Thermistor™ IC,  Tape and Reel, Pb free  Linear Active Thermistor™ IC,  Tape and Reel, Pb free	d)	MCP9700T-H/LT:	Linear Active Thermistor™ IC, Tape and Reel, High Temperature, 5LD SC70 package.
Temperature Range:		to +125°C	a)	MCP9700AT-E/LT:	Linear Active Thermistor™ IC, Tape and Reel, 5LD SC70 package.
Pagkaga:		to +150°C (MCP9700 only)  Small Outline Transistor, 5-lead	b)	MCP9700AT-E/TO:	Linear Active Thermistor™ IC, Tape and Reel, 3LD SOT-23 package.
Package:	TO = Plastic S	Small Outline Transistor, 3-lead Small Outline Transistor, 3-lead Small Outline Transistor, 3-lead	a)	MCP9701T-E/LT:	Linear Active Thermistor™
					IC, Tape and Reel, 5LD SC70 package.
			b)	MCP9701-E/TO:	Linear Active Thermistor™ IC, 3LD TO-92 package.
			c)	MCP9701T-E/TO:	Linear Active Thermistor™ IC, Tape and Reel, 3LD SOT-23 package.
			a)	MCP9701AT-E/LT:	Linear Active Thermistor™ IC, Tape and Reel, 5LD SC70 package.
			b)	MCP9701AT-E/TO:	Linear Active Thermistor™ IC, Tape and Reel, 3LD SOT-23 package.

#### Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

#### **Trademarks**

The Microchip name and logo, the Microchip logo, Accuron, dsPIC, KEELOQ, KEELOQ logo, MPLAB, PIC, PICmicro, PICSTART, rfPIC, SmartShunt and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

FilterLab, Linear Active Thermistor, MXDEV, MXLAB, SEEVAL, SmartSensor and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Application Maestro, CodeGuard, dsPICDEM, dsPICDEM.net, dsPICworks, dsSPEAK, ECAN, ECONOMONITOR, FanSense, In-Circuit Serial Programming, ICSP, ICEPIC, Mindi, MiWi, MPASM, MPLAB Certified logo, MPLIB, MPLINK, mTouch, PICkit, PICDEM, PICDEM.net, PICtail, PIC<sup>32</sup> logo, PowerCal, PowerInfo, PowerMate, PowerTool, REAL ICE, rfLAB, Select Mode, Total Endurance, WiperLock and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2009, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

Printed on recycled paper.

# QUALITY MANAGEMENT SYSTEM CERTIFIED BY DNV ISO/TS 16949:2002

Microchip received ISO/TS-16949:2002 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.



### WORLDWIDE SALES AND SERVICE

#### **AMERICAS**

**Corporate Office** 

2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7200 Fax: 480-792-7277 Technical Support:

http://support.microchip.com

Web Address: www.microchip.com

Atlanta

Duluth, GA Tel: 678-957-9614 Fax: 678-957-1455

**Boston** 

Westborough, MA Tel: 774-760-0087 Fax: 774-760-0088

Chicago

Itasca, IL Tel: 630-285-0071 Fax: 630-285-0075

Cleveland

Independence, OH Tel: 216-447-0464 Fax: 216-447-0643

**Dallas** 

Addison, TX Tel: 972-818-7423 Fax: 972-818-2924

Detroit

Farmington Hills, MI Tel: 248-538-2250 Fax: 248-538-2260

Kokomo

Kokomo, IN Tel: 765-864-8360 Fax: 765-864-8387

Los Angeles

Mission Viejo, CA Tel: 949-462-9523 Fax: 949-462-9608

Santa Clara

Santa Clara, CA Tel: 408-961-6444 Fax: 408-961-6445

Toronto

Mississauga, Ontario,

Canada

Tel: 905-673-0699 Fax: 905-673-6509

#### ASIA/PACIFIC

**Asia Pacific Office** 

Suites 3707-14, 37th Floor Tower 6, The Gateway Harbour City, Kowloon

Hong Kong Tel: 852-2401-1200

Fax: 852-2401-3431

**Australia - Sydney** Tel: 61-2-9868-6733 Fax: 61-2-9868-6755

China - Beijing

Tel: 86-10-8528-2100 Fax: 86-10-8528-2104

China - Chengdu

Tel: 86-28-8665-5511 Fax: 86-28-8665-7889

China - Hong Kong SAR

Tel: 852-2401-1200 Fax: 852-2401-3431

China - Nanjing

Tel: 86-25-8473-2460 Fax: 86-25-8473-2470

China - Qingdao

Tel: 86-532-8502-7355 Fax: 86-532-8502-7205

China - Shanghai

Tel: 86-21-5407-5533 Fax: 86-21-5407-5066

China - Shenyang

Tel: 86-24-2334-2829 Fax: 86-24-2334-2393

China - Shenzhen

Tel: 86-755-8203-2660 Fax: 86-755-8203-1760

China - Wuhan

Tel: 86-27-5980-5300 Fax: 86-27-5980-5118

China - Xiamen

Tel: 86-592-2388138 Fax: 86-592-2388130

China - Xian

Tel: 86-29-8833-7252 Fax: 86-29-8833-7256

China - Zhuhai

Tel: 86-756-3210040 Fax: 86-756-3210049

#### ASIA/PACIFIC

India - Bangalore

Tel: 91-80-3090-4444 Fax: 91-80-3090-4080

India - New Delhi

Tel: 91-11-4160-8631 Fax: 91-11-4160-8632

India - Pune

Tel: 91-20-2566-1512 Fax: 91-20-2566-1513

Japan - Yokohama

Tel: 81-45-471- 6166 Fax: 81-45-471-6122

Korea - Daegu

Tel: 82-53-744-4301 Fax: 82-53-744-4302

Korea - Seoul

Tel: 82-2-554-7200 Fax: 82-2-558-5932 or 82-2-558-5934

Malaysia - Kuala Lumpur

Tel: 60-3-6201-9857 Fax: 60-3-6201-9859

Malaysia - Penang

Tel: 60-4-227-8870 Fax: 60-4-227-4068

Philippines - Manila

Tel: 63-2-634-9065 Fax: 63-2-634-9069

Singapore

Tel: 65-6334-8870 Fax: 65-6334-8850

Taiwan - Hsin Chu

Tel: 886-3-6578-300 Fax: 886-3-6578-370

Taiwan - Kaohsiung

Tel: 886-7-536-4818 Fax: 886-7-536-4803

Taiwan - Taipei

Tel: 886-2-2500-6610 Fax: 886-2-2508-0102

Thailand - Bangkok

Tel: 66-2-694-1351 Fax: 66-2-694-1350

#### **EUROPE**

Austria - Wels

Tel: 43-7242-2244-39 Fax: 43-7242-2244-393

Denmark - Copenhagen

Tel: 45-4450-2828 Fax: 45-4485-2829

France - Paris

Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79

Germany - Munich

Tel: 49-89-627-144-0 Fax: 49-89-627-144-44

Italy - Milan

Tel: 39-0331-742611 Fax: 39-0331-466781

Netherlands - Drunen

Tel: 31-416-690399 Fax: 31-416-690340

Spain - Madrid

Tel: 34-91-708-08-90 Fax: 34-91-708-08-91

**UK - Wokingham** Tel: 44-118-921-5869 Fax: 44-118-921-5820

03/26/09



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

### Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru