52×15 mm

San Ace B52 9BC type

General Specifications

- Material ····· Frame: Plastic (Flammability: UL 94V-0), Impeller: Plastic (Flammability: UL 94V-0)
- Expected life ····· See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60˚C, rated voltage)
- Motor protection function ····· Locked rotor burnout protection, Reverse polarity protection
  For details, please refer to p. 547.
- Dielectric strength ····· 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance ····· 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)
- Sound pressure level (SPL) ····· At 1 m away from the air inlet
- Storage temperature ····· -30 to +70˚C (Non-condensing)
- Lead wire ····· ⊕Red ⊖Black (Sensor) Yellow
- Mass ····· 33 g

Specifications

The models listed below **have pulse sensors.**

Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min]	Max. airflow [CFM]	Max. static pressure [Pa]	Max. static pressure [inchH₂O]	SPL [dB (A)]	Operating temperature [˚C]	Expected life [h]
109BC12GC7-1	12	6 to 13.8	0.12	1.44	6200	0.125	4.4	215	0.86	43	-20 to +70	40000/60˚C (70000/40˚C)
109BC12HC7-1			0.1	1.2	5600	0.112	4.0	165	0.66	40		
109BC12FC7-1			0.08	0.96	5100	0.101	3.6	130	0.52	38		
109BC12MC7-1			0.06	0.72	4600	0.091	3.2	100	0.4	35		
109BC24GC7-1	24	12 to 27.6	0.07	1.68	6200	0.125	4.4	215	0.86	43		
109BC24HC7-1			0.05	1.2	5600	0.112	4.0	165	0.66	40		
109BC24FC7-1			0.04	0.96	5100	0.101	3.6	130	0.52	38		

The following sensor and control options are available for selection.
Available for all models. Without sensor Lock sensor

Airflow - Static Pressure Characteristics

109BC12GC7-1 With pulse sensor

Operating voltage range

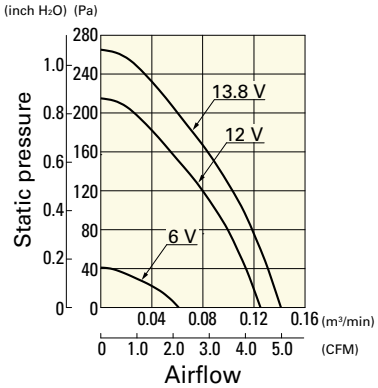

109BC12HC7-1 With pulse sensor

Operating voltage range

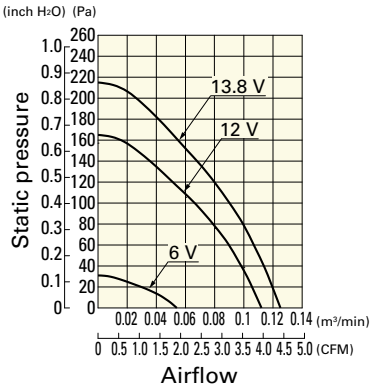

109BC12FC7-1 With pulse sensor

Operating voltage range

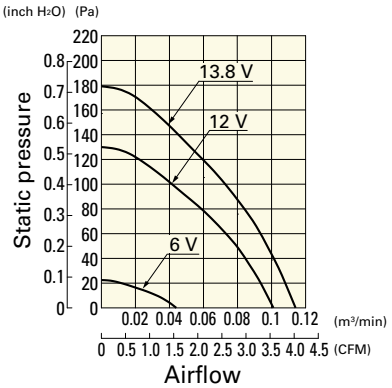

Airflow - Static Pressure Characteristics

109BC12MC7-1 With pulse sensor

Operating voltage range

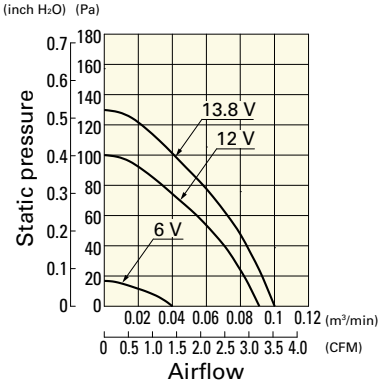

109BC24GC7-1 With pulse sensor

Operating voltage range

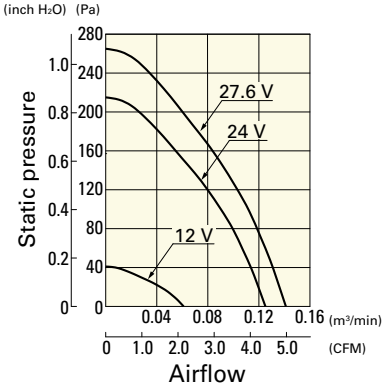

109BC24HC7-1 With pulse sensor

Operating voltage range

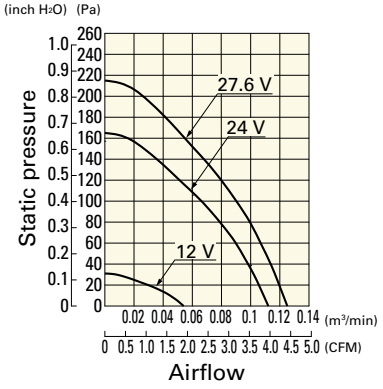

109BC24FC7-1 With pulse sensor

Operating voltage range

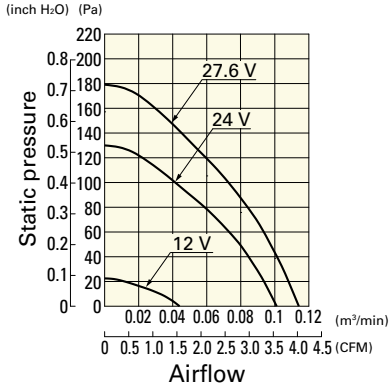

Dimensions (unit: mm)

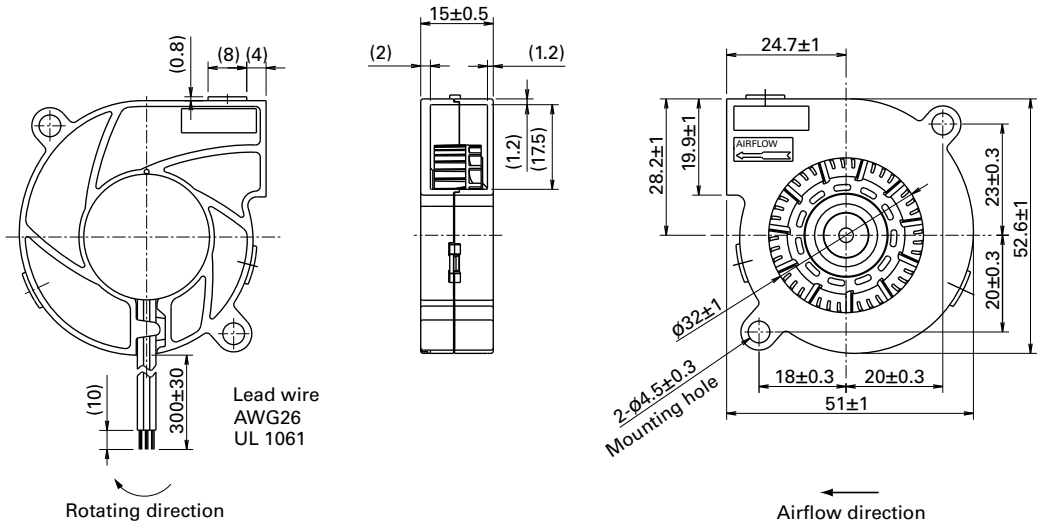

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru