

# General Specifications

## Electrical Capacity (Resistive Load)

|                                              |                                                                                |
|----------------------------------------------|--------------------------------------------------------------------------------|
| <b>Power Level (silver):</b>                 | 6A @ 125V AC & 3A @ 250V AC or 3A @ 30V DC                                     |
| <b>Logic Level (gold):</b>                   | 0.4VA maximum @ 28V AC/DC maximum (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V) |
| <b>Logic/Power Level: (gold over silver)</b> | Combines silver & gold ratings                                                 |

Note: Find additional explanation dual rating & operating range in Supplement section.

## Other Ratings

|                                 |                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Contact Resistance:</b>      | 10 milliohms maximum for silver; 20 milliohms maximum for gold                                                                   |
| <b>Insulation Resistance:</b>   | 1,000 megohms minimum @ 500V DC                                                                                                  |
| <b>Dielectric Strength:</b>     | 1,000V AC minimum between contacts for 1 minute minimum;<br>1,500V AC minimum between contacts & case for 1 minute minimum       |
| <b>Mechanical Life:</b>         | 50,000 operations minimum for splashproof models; 100,000 for all other models                                                   |
| <b>Electrical Life:</b>         | 25,000 operations minimum for silver; 50,000 operations minimum for gold<br>50,000 operations minimum for silver at 3A @ 125V AC |
| <b>Nominal Operating Force:</b> | Momentary Action: 1-pole 9.32N; 2-pole 16.18N; 4-pole 25.54N;<br>Alternate Action: 1-pole 4.41N; 2-pole 7.06N; 4-pole 11.77N     |
| <b>Contact Timing:</b>          | Slow make, slow break                                                                                                            |
| <b>Plunger Travel:</b>          | Screw-on Cap (Mom.)      Screw-on Cap (Alt.)      Snap-on Cap (Mom. & Alt.)                                                      |
| <b>Pretravel:</b>               | .028" (0.71mm)      .110" (2.80mm)      .125" (3.19mm)                                                                           |
| <b>Overtravel:</b>              | .043" (1.09mm)      .043" (1.10mm)      .050" (1.26mm)                                                                           |
| <b>Total Travel</b>             | .071" (1.80mm)      .153" (3.90mm)      .175" (4.45mm)                                                                           |

## Materials & Finishes

|                             |                                                                                                                       |                 |                                   |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------|-----------------|-----------------------------------|
| <b>Plunger:</b>             | Brass w/nickel plating; polyacetal w/B1 bushing                                                                       | <b>Bushing:</b> | Brass with nickel plating         |
| <b>Frame:</b>               | Stainless steel                                                                                                       | <b>Case:</b>    | Diallyl phthalate resin (UL94V-0) |
| <b>Movable Contactor:</b>   | Phosphor bronze with silver or gold plating                                                                           |                 |                                   |
| <b>Movable Contacts:</b>    | Silver alloy (code W); copper with gold plating (code G); or silver alloy with gold plating (code A)                  |                 |                                   |
| <b>Stationary Contacts:</b> | Silver with silver plating (code W); copper or brass with gold plating (code G); or silver with gold plating (code A) |                 |                                   |
| <b>Terminals:</b>           | Copper or brass with silver plating; copper or brass with gold plating                                                |                 |                                   |

## Environmental Data

|                              |                                                                                                                                              |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operating Temp Range:</b> | -30°C through +85°C (-22°F through +185°F)                                                                                                   |
| <b>Humidity:</b>             | 90 ~ 95% humidity for 96 hours @ 40°C (104°F)                                                                                                |
| <b>Vibration:</b>            | 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours |
| <b>Shock:</b>                | 50G (490m/s <sup>2</sup> ) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)                               |
| <b>Sealing:</b>              | B3 & D3 bushing options equivalent to IP67                                                                                                   |

## Installation

|                                   |                                                                                                                             |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| <b>Mounting Torque:</b>           | 1.5Nm (13.0 lb•in) for double nut; .7Nm (6.0 lb•in) for single nut                                                          |
| <b>Cap Installation Force:</b>    | 80.0N (18.0 lbf) maximum downward force on actuator                                                                         |
| <b>Soldering Time &amp; Temp:</b> | Wave Soldering (PC version): See Profile A in Supplement section.<br>Manual Soldering: See Profile A in Supplement section. |
| <b>Process Seal:</b>              | These devices are not process sealed. Hand clean locally using alcohol based solution.                                      |

## Standards & Certifications

|                                |                                                                                                                                                                                                                                                    |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Flammability Standards:</b> | UL94V-0 case                                                                                                                                                                                                                                       |
| <b>UL:</b>                     | <b>File No. E44145 - Recognized only when ordered with marking on switch.</b><br>Add "/U" or "/CUL" before dash in part number to order UL recognized switch.<br>All models recognized at 6A @ 125V AC or 3A @ 250V AC or 0.4VA max. @ 28V DC max. |
| <b>CSA:</b>                    | <b>File No. 023535_0_000 - Certified only when ordered with marking on switch.</b><br>Add "/C" before dash in part number to order CSA certified switch.<br>All models certified at 6A @ 125V AC or 3A @ 250V AC or 0.4VA max. @ 28V max.          |

# Distinctive Characteristics

Guide interlocked with actuator block prevents window locking and maintains correct plunger alignment to assure contact stability.

Employs an over-center actuator mechanism, which diminishes sparking and increases operating life in AC circuits.

High torque bushing construction prevents rotation or separation from frame during installation.


Splashproof option (D3 and B3 bushing codes) features an o-ring within the bushing and one under the face nut to protect from splashed, sprayed, or spilled liquids.

High insulating barriers, formed in the molded diallyl phthalate case, increase isolation of circuits in multipole devices.

Prominent external insulating barriers increase insulation resistance and dielectric strength.

Epoxy sealed terminals prevent entry of solder flux and other contaminants.

Clinching of the frame to the case well above the base and terminals provides 1,500V dielectric strength.

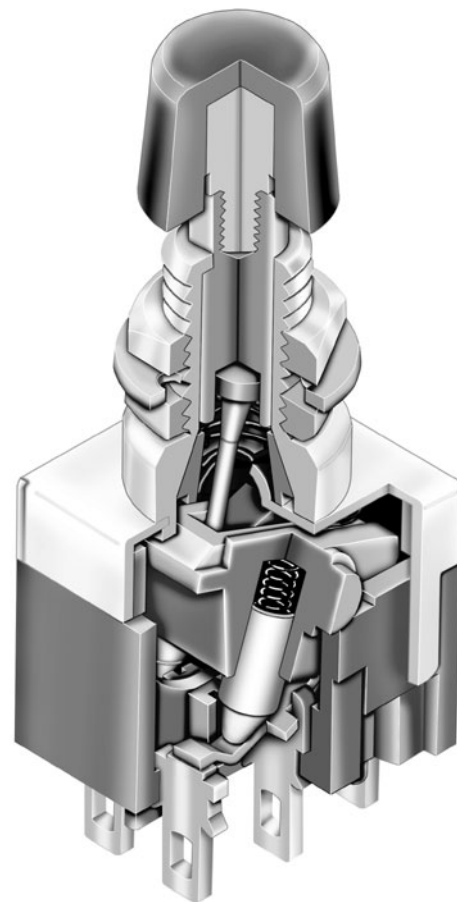

Actual Size



Bushing Mount

Page C74



Bracket PC Mount

Page C80



Large Bushing

Page C87

### TYPICAL SWITCH ORDERING EXAMPLE

**MB**

**2011**

**S**

**S2**

**G**

**13**

**C**

**A**

#### Poles & Circuits

|             |      |    |      |
|-------------|------|----|------|
| <b>2011</b> | SPDT | ON | (ON) |
| <b>2065</b> | SPDT | ON | ON   |
| <b>2061</b> | DPDT | ON | (ON) |
| <b>2085</b> | DPDT | ON | ON   |
| <b>2181</b> | 4PDT | ON | (ON) |
| <b>2185</b> | 4PDT | ON | ON   |

( ) = Momentary

4-pole not for use with right angle terminals

#### Contact Materials & Ratings

|          |                                                                          |
|----------|--------------------------------------------------------------------------|
| <b>W</b> | Silver<br>Rated 6A @ 125V AC<br>& 3A @ 250V AC                           |
| <b>G</b> | Gold<br>Rated 0.4VA max @<br>28V AC/DC max                               |
| <b>A</b> | Gold over Silver<br>Rated 6A @ 125V AC<br>& 0.4VA max @ 28V<br>AC/DC max |

#### Caps

|          |                         |
|----------|-------------------------|
| <b>B</b> | .315" (8.0mm) Diameter  |
| <b>C</b> | .394" (10.0mm) Diameter |

#### Cap Colors

|          |        |
|----------|--------|
| <b>A</b> | Black  |
| <b>B</b> | White  |
| <b>C</b> | Red    |
| <b>E</b> | Yellow |
| <b>F</b> | Green  |
| <b>G</b> | Blue   |
| <b>H</b> | Gray   |

#### Plunger Type

|          |                           |
|----------|---------------------------|
| <b>S</b> | Plunger for Screw-on Caps |
|----------|---------------------------|

#### Bushings

|           |                                                                                                             |
|-----------|-------------------------------------------------------------------------------------------------------------|
| <b>S2</b> | .335" (8.5mm)<br>Smooth with Keyway                                                                         |
| <b>S1</b> | .335" (8.5mm)<br>Threaded with Keyway                                                                       |
| <b>A2</b> | .200" (5.08mm)<br>Smooth with Keyway<br>Only Available in<br>Part Numbers<br>MB2011SA2G31 &<br>MB2011SA2W31 |

#### Terminals


|           |                                                                                             |
|-----------|---------------------------------------------------------------------------------------------|
| <b>13</b> | .250" (6.35mm) Straight PC<br>with Bracket                                                  |
| <b>40</b> | .150" (3.81mm) Vertical PC                                                                  |
| <b>45</b> | .100" (2.54mm) Vertical PC                                                                  |
| <b>30</b> | Right Angle PC with .646"<br>(16.4mm) Support to Terminals<br>Available in 1- & 2-pole only |
| <b>31</b> | Right Angle PC with .500"<br>(12.7mm) Support to Terminals<br>Available in 1-pole only      |

#### IMPORTANT:



Switches are supplied without UL, cULus & CSA marking unless specified.  
**UL, cULus & CSA recognized only when ordered with marking on the switch.**  
Specific models, ratings, & ordering instructions are noted on General Specifications page.

#### DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

**MB2011SS2G13-CA**

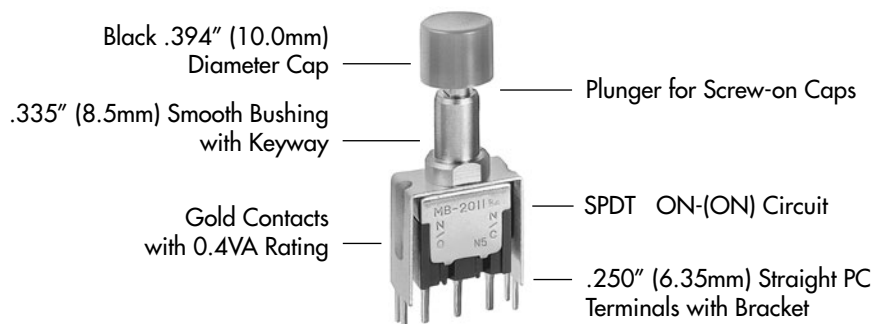

## POLES &amp; CIRCUITS

| Pole | Model  | Plunger Position<br>( ) = Momentary                                                         |                                                                                           | Connected Terminals                                                                         |                                                                                           | Throw & Switch Schematics                                                                   |
|------|--------|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
|      |        | Normal<br> | Down<br> | Normal<br> | Down<br> |                                                                                             |
| SP   | MB2011 | ON                                                                                          | (ON)                                                                                      | 2-3                                                                                         | 2-1                                                                                       | SPDT<br> |
|      | MB2065 | ON                                                                                          | ON                                                                                        |                                                                                             |                                                                                           |                                                                                             |
| DP   | MB2061 | ON                                                                                          | (ON)                                                                                      | 2-3 5-6                                                                                     | 2-1 5-4                                                                                   | DPDT<br> |
|      | MB2085 | ON                                                                                          | ON                                                                                        |                                                                                             |                                                                                           |                                                                                             |
| 4P   | MB2181 | ON                                                                                          | (ON)                                                                                      | 2-3 5-6<br>8-9 11-12                                                                        | 2-1 5-4<br>8-7 11-10                                                                      | 4PDT<br> |
|      | MB2185 | ON                                                                                          | ON                                                                                        |                                                                                             |                                                                                           |                                                                                             |





Note: Terminal numbers are not actually on the switch.

## PLUNGER TYPE




On alternate action models, after transferring circuit, the plunger returns to its original position and does not latch down.

**S**

## Plunger for Screw-on Caps

Momentary  
Plunger LengthMomentary  
Cap LocationAlternate  
Plunger LengthAlternate  
Cap Location

## BUSHINGS

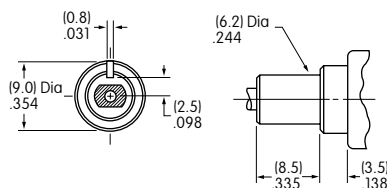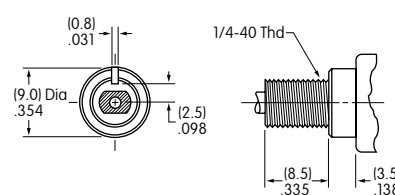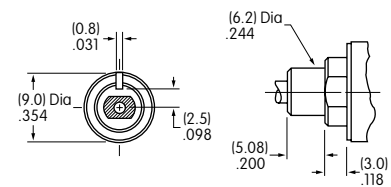
**S2**.335" (8.5mm)  
Smooth with Keyway**S1**.335" (8.5mm)  
Threaded with Keyway**A2**.200" (5.08mm)  
Smooth with Keyway

Standard hardware: 2 hex nuts (AT513H)  
& 1 lockwasher (AT509)  
Optional hardware: Locking ring (AT507)


Only available in part numbers  
MB2011SA2W31 & MB2011SA2G31

## Panel Cutouts

For S2, S1, or A2 Bushing  
with Keyway



With Optional  
Locking Ring








Maximum Panel Thickness with  
Standard Hardware: .154" (3.9mm)

### CONTACT MATERIALS & RATINGS



|                                                                                                                                                                                                                                       |                           |                            |                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|----------------------------|------------------------------------------------------------------|
| <b>W</b>                                                                                                                                                                                                                              | Silver over Silver        | Power Level                | 6A @ 125V AC & 3A @ 250V AC                                      |
| <b>G</b>                                                                                                                                                                                                                              | Gold over Brass or Copper | Logic Level                | 0.4VA maximum @ 28V AC/DC maximum                                |
| Note: Complete explanation of operating range in Supplement section.                                                                                                                                                                  |                           |                            |                                                                  |
| <b>A</b>                                                                                                                                                                                                                              | Gold over Silver          | Power Level or Logic Level | 6A @ 125V AC & 3A @ 250V AC or 0.4VA maximum @ 28V AC/DC maximum |
| Note: This dual rated option is suitable when two or more identical switches are used in logic and in power circuits within the same application. See Supplement section for complete explanation of dual rating and operating range. |                           |                            |                                                                  |

### TERMINALS

|                                                                                     |                                                               |                                                                                       |                                                               |                                                                                      |                                   |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------------------------|
| <b>13</b>                                                                           | <b>.250" (6.35mm) Straight PC with Bracket</b>                | <b>40</b>                                                                             | <b>.150" (3.81mm) Vertical PC</b>                             | <b>45</b>                                                                            | <b>.100" (2.54mm) Vertical PC</b> |
|   |                                                               |     |                                                               |  |                                   |
| <b>30</b>                                                                           | <b>Right Angle PC with .646" (16.4mm) Support to Terminal</b> | <b>31</b>                                                                             | <b>Right Angle PC with .500" (12.7mm) Support to Terminal</b> |                                                                                      |                                   |
|  |                                                               |  |                                                               |                                                                                      |                                   |
| Only Available in 1 & 2 Pole                                                        |                                                               |                                                                                       |                                                               |                                                                                      |                                   |

Note: Full dimensioned drawings appear on the following pages.

### CAPS & CAP COLORS

|                                     |                                                 |                                                                                     |          |                                                  |                                                                                       |
|-------------------------------------|-------------------------------------------------|-------------------------------------------------------------------------------------|----------|--------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>B</b>                            | AT413<br>.315" (8.0mm) Diameter<br>Screw-on Cap |  | <b>C</b> | AT407<br>.394" (10.0mm) Diameter<br>Screw-on Cap |  |
| Cap Material: PBT<br>Finish: Glossy |                                                 | Cap Material: PBT<br>Finish: Glossy                                                 |          |                                                  |                                                                                       |




Cap Colors Available:

|          |       |          |       |          |     |          |        |          |       |          |      |          |      |
|----------|-------|----------|-------|----------|-----|----------|--------|----------|-------|----------|------|----------|------|
| <b>A</b> | Black | <b>B</b> | White | <b>C</b> | Red | <b>E</b> | Yellow | <b>F</b> | Green | <b>G</b> | Blue | <b>H</b> | Gray |
|----------|-------|----------|-------|----------|-----|----------|--------|----------|-------|----------|------|----------|------|

## TYPICAL SWITCH DIMENSIONS

### Single Pole




### Straight PC with Bracket

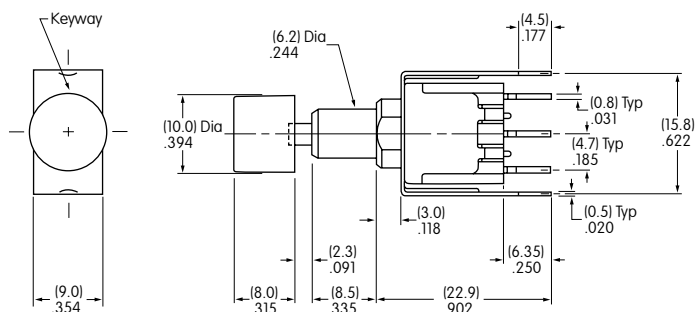

MB2011SS2G13-CA

### Double Pole




### Straight PC with Bracket

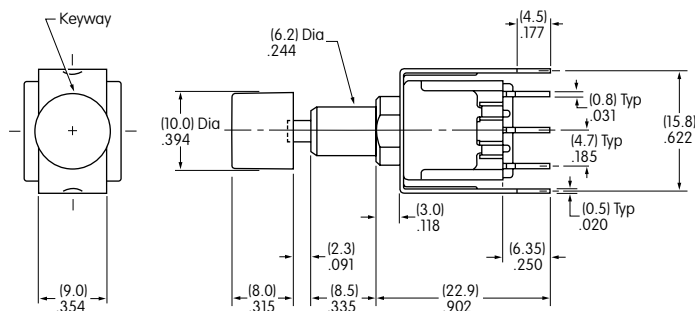

MB2061SS2G13-CA

### Four Pole

### Straight PC with Bracket

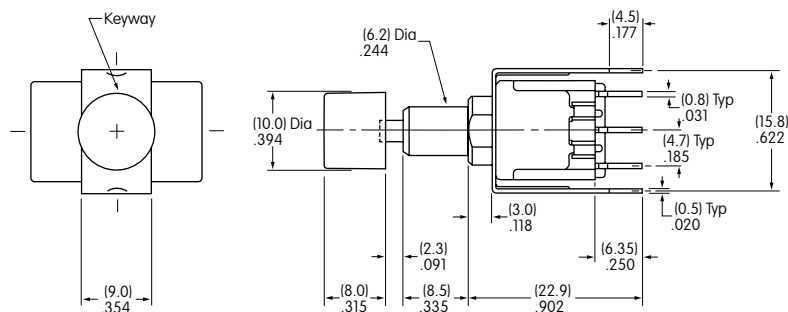


MB2181SS2G13-CA

### TYPICAL SWITCH DIMENSIONS

#### .150" (3.81mm) Vertical PC


#### Single Pole

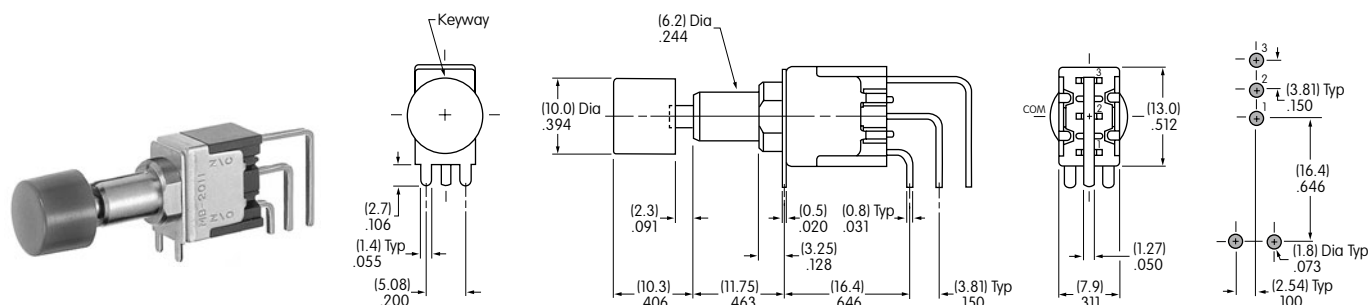

MB2011SS2G40-CA

#### .150" (3.81mm) Vertical PC


#### Double Pole

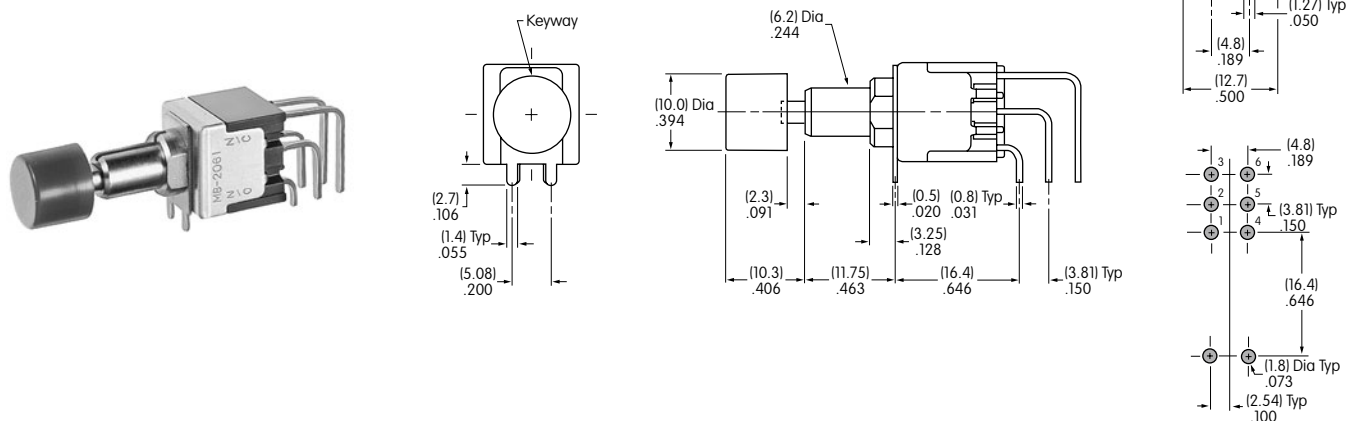

MB2061SS2G40-CA

#### .150" (3.81mm) Vertical PC

#### Four Pole


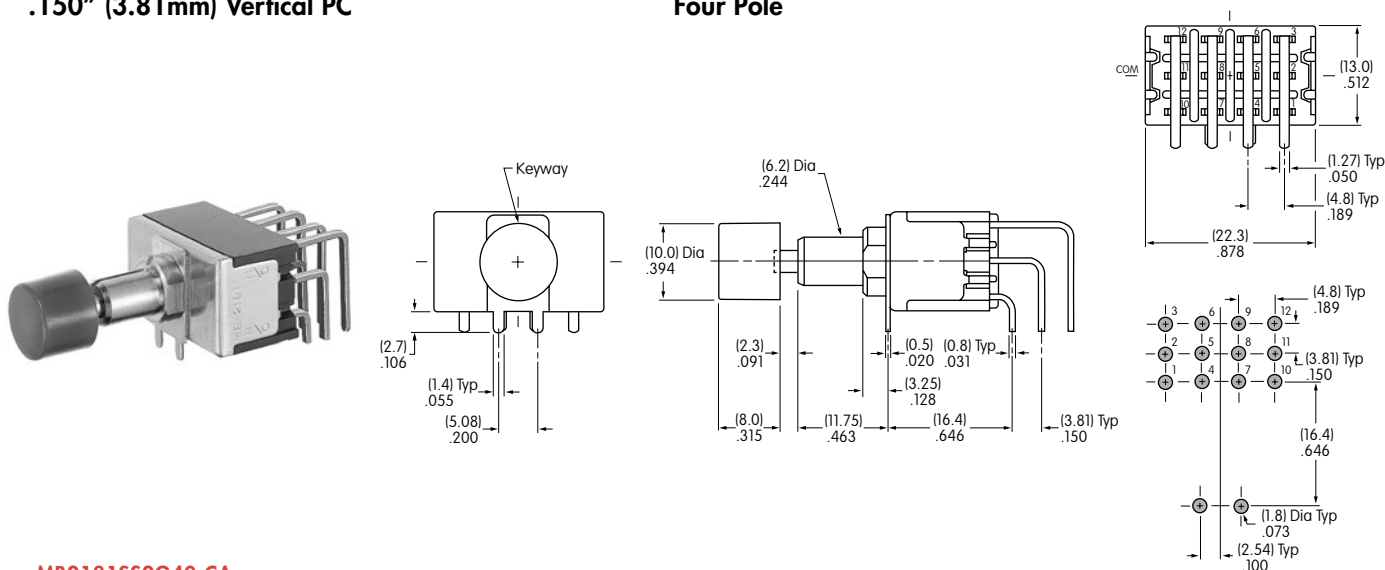


MB2181SS2G40-CA

## TYPICAL SWITCH DIMENSIONS

### Single Pole



### .100" (2.54mm) Vertical PC

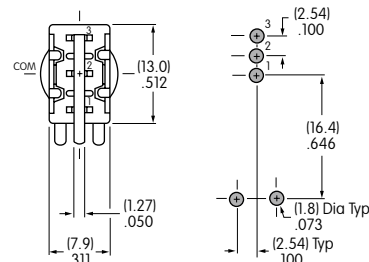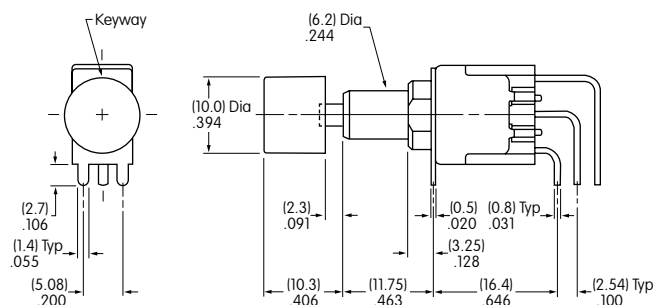

MB2011SS2G45-CA

### Double Pole



### .100" (2.54mm) Vertical PC

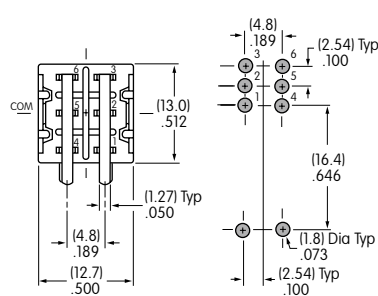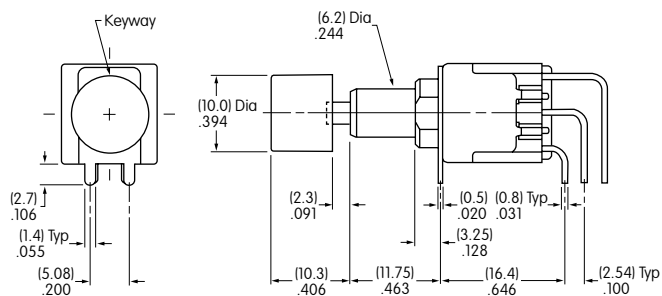

MB2061SS2G45-CA

### Four Pole

### .100" (2.54mm) Vertical PC

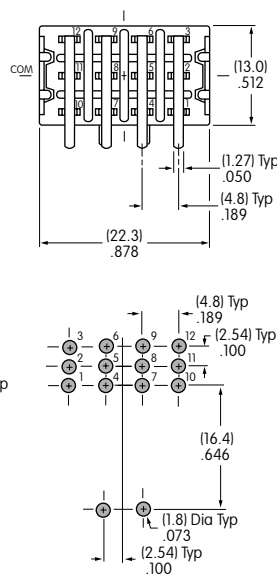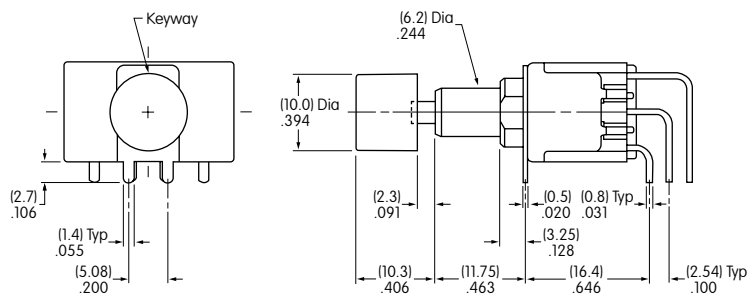


MB2181SS2G45-CA

### TYPICAL SWITCH DIMENSIONS

#### Right Angle PC


#### Single Pole

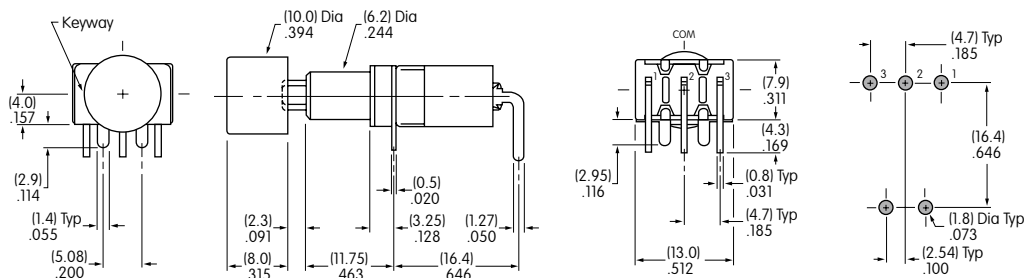

MB2011SS2G30-CA

#### Right Angle PC


#### Double Pole

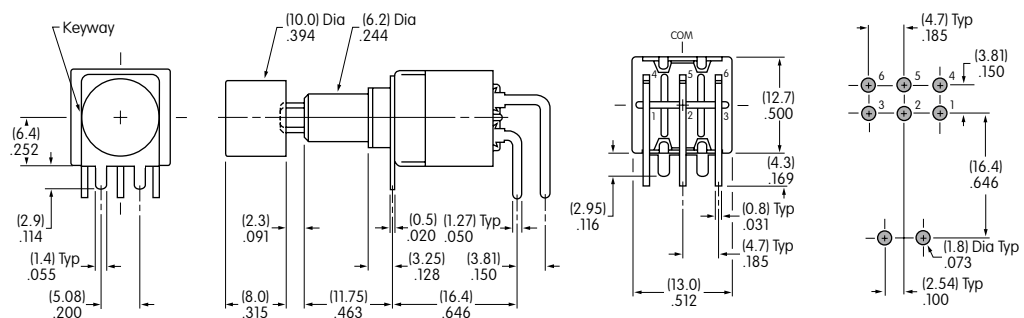

MB2061SS2G30-CA

#### Right Angle PC with .500" (12.7mm) Support to Terminal

#### Single Pole

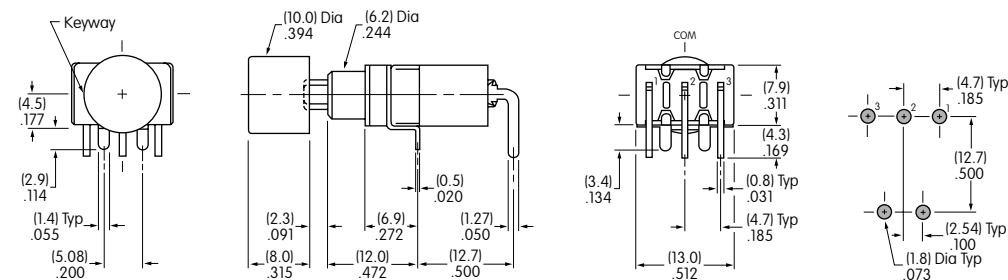

MB2011SA2G31-CA

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)