

## Single Phase Bridge (Power Modules), 25/35 A


**GBPC...A**

**GBPC...W**

### FEATURES

- Universal, 3 way terminals: push-on, wrap around or solder
- High thermal conductivity package, electrically insulated case
- Positive polarity symbol molded on the plastic case
- Center hole fixing
- Glass passivated diode chips
- Excellent power/volume ratio
- Nickel plated terminals solderable using lead (Pb)-free solder; Solder Alloy Sn/Ag/Cu (SAC305); Solder temperature 260 to 275 °C
- Wire lead version available
- UL E300359 approved 
- RoHS compliant
- Designed and qualified for industrial and consumer level


**RoHS**  
COMPLIANT

### PRODUCT SUMMARY

|       |         |
|-------|---------|
| $I_o$ | 25/35 A |
|-------|---------|

### DESCRIPTION/APPLICATIONS

A range of extremely compact, encapsulated single phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and instrumentation applications

### MAJOR RATINGS AND CHARACTERISTICS

| SYMBOL    | CHARACTERISTICS | GBPC25      | GBPC35 | UNITS            |
|-----------|-----------------|-------------|--------|------------------|
| $I_o$     |                 | 25          | 35     | A                |
|           | $T_c$           | 60          | 55     | °C               |
| $I_{FSM}$ | 50 Hz           | 400         | 475    | A                |
|           | 60 Hz           | 420         | 500    |                  |
| $I^2t$    | 50 Hz           | 790         | 1130   | A <sup>2</sup> s |
|           | 60 Hz           | 725         | 1030   |                  |
| $V_{RRM}$ | Range           | 200 to 1200 |        | V                |
| $T_J$     |                 | - 55 to 150 |        | °C               |

**ELECTRICAL SPECIFICATIONS**

| <b>VOLTAGE RATINGS</b>                      |              |                                                                                    |                                                                                        |                                                                   |                                                                                       |
|---------------------------------------------|--------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| TYPE NUMBER                                 | VOLTAGE CODE | $V_{RRM}$ , MAXIMUM REPETITIVE PEAK AC REVERSE VOLTAGE<br>$T_J = T_J$ MAXIMUM<br>V | $V_{RSM}$ , MAXIMUM NON-REPETITIVE PEAK AC REVERSE VOLTAGE<br>$T_J = T_J$ MAXIMUM<br>V | $I_{RRM}$ MAXIMUM AT RATED $V_{RRM}$<br>$T_J = T_J$ MAXIMUM<br>mA | $I_{RRM}$ MAXIMUM DC REVERSE CURRENT AT<br>$T_J = 125^\circ\text{C}$<br>$\mu\text{A}$ |
| GBPC25/35..A <sup>(1)</sup><br>GBPC25/35..W | 02           | 200                                                                                | 275                                                                                    | 2                                                                 | 500                                                                                   |
|                                             | 04           | 400                                                                                | 500                                                                                    |                                                                   |                                                                                       |
|                                             | 06           | 600                                                                                | 725                                                                                    |                                                                   |                                                                                       |
|                                             | 08           | 800                                                                                | 900                                                                                    |                                                                   |                                                                                       |
|                                             | 10           | 1000                                                                               | 1100                                                                                   |                                                                   |                                                                                       |
|                                             | 12           | 1200                                                                               | 1300                                                                                   |                                                                   |                                                                                       |

**Note**

(1) See Ordering Information table at the end of datasheet

| FORWARD CONDUCTION                                     |                     |                                                                                                                                       |                                  |                                                 |        |        |                    |  |
|--------------------------------------------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|-------------------------------------------------|--------|--------|--------------------|--|
| PARAMETER                                              | SYMBOL              | TEST CONDITIONS                                                                                                                       |                                  |                                                 | GBPC25 | GBPC35 | UNITS              |  |
| Maximum DC output current at case temperature          | I <sub>O</sub>      | Resistive or inductive load                                                                                                           |                                  |                                                 | 25     | 35     | A                  |  |
|                                                        |                     | Capacitive load                                                                                                                       |                                  |                                                 | 20     | 28     |                    |  |
|                                                        |                     |                                                                                                                                       |                                  |                                                 | 60     | 55     | °C                 |  |
| Maximum peak, one-cycle non-repetitive forward current | I <sub>FSM</sub>    | t = 10 ms                                                                                                                             | No voltage reapplied             | Initial T <sub>J</sub> = T <sub>J</sub> maximum | 400    | 475    | A                  |  |
|                                                        |                     | t = 8.3 ms                                                                                                                            |                                  |                                                 | 420    | 500    |                    |  |
|                                                        |                     | t = 10 ms                                                                                                                             | 100 % V <sub>RRM</sub> reapplied |                                                 | 335    | 400    |                    |  |
|                                                        |                     | t = 8.3 ms                                                                                                                            |                                  |                                                 | 350    | 420    |                    |  |
| Maximum I <sup>2</sup> t for fusing                    | I <sup>2</sup> t    | t = 10 ms                                                                                                                             | No voltage reapplied             |                                                 | 790    | 1130   | A <sup>2</sup> s   |  |
|                                                        |                     | t = 8.3 ms                                                                                                                            |                                  |                                                 | 725    | 1030   |                    |  |
|                                                        |                     | t = 10 ms                                                                                                                             | 100 % V <sub>RRM</sub> reapplied |                                                 | 560    | 800    |                    |  |
|                                                        |                     | t = 8.3 ms                                                                                                                            |                                  |                                                 | 512    | 730    |                    |  |
| Maximum I <sup>2</sup> √t for fusing                   | I <sup>2</sup> √t   | I <sup>2</sup> t for time t <sub>x</sub> = I <sup>2</sup> √t × √t <sub>x</sub> ; 0.1 ≤ t <sub>x</sub> ≤ 10 ms, V <sub>RRM</sub> = 0 V |                                  |                                                 | 7.9    | 11.3   | kA <sup>2</sup> √s |  |
| Low level of threshold voltage                         | V <sub>F(TO)1</sub> | (16.7 % × π × I <sub>F(AV)</sub> ) < I < π × I <sub>F(AV)</sub> , T <sub>J</sub> maximum                                              |                                  |                                                 | 0.76   | 0.77   | V                  |  |
| High level of threshold voltage                        | V <sub>F(TO)2</sub> | (I > π × I <sub>F(AV)</sub> ), T <sub>J</sub> maximum                                                                                 |                                  |                                                 | 0.89   | 0.92   |                    |  |
| Low level forward slope resistance                     | r <sub>t1</sub>     | (16.7 % × π × I <sub>F(AV)</sub> ) < I < π × I <sub>F(AV)</sub> , T <sub>J</sub> maximum                                              |                                  |                                                 | 8.2    | 4.852  | mΩ                 |  |
| High level forward slope resistance                    | r <sub>t2</sub>     | (I > π × I <sub>F(AV)</sub> ), T <sub>J</sub> maximum                                                                                 |                                  |                                                 | 6.8    | 3.867  |                    |  |
| Maximum forward voltage drop                           | V <sub>FM</sub>     | T <sub>J</sub> = 25 °C, I <sub>FM</sub> = I <sub>Favg</sub> (arm)                                                                     |                                  |                                                 | 1.1    |        | V                  |  |
| Maximum DC reverse current                             | I <sub>RRM</sub>    | T <sub>J</sub> = 25 °C, per diode at V <sub>RRM</sub>                                                                                 |                                  |                                                 | 5.0    |        | μA                 |  |
| RMS isolation voltage base plate                       | V <sub>INS</sub>    | f = 50 Hz, t = 1 s                                                                                                                    |                                  |                                                 | 2700   |        | V                  |  |



| THERMAL AND MECHANICAL SPECIFICATIONS                   |                                   |                                            |             |        |                     |
|---------------------------------------------------------|-----------------------------------|--------------------------------------------|-------------|--------|---------------------|
| PARAMETER                                               | SYMBOL                            | TEST CONDITIONS                            | GBPC25      | GBPC35 | UNITS               |
| Junction and storage temperature range                  | T <sub>J</sub> , T <sub>Stg</sub> |                                            | - 55 to 150 |        | °C                  |
| Maximum thermal resistance, junction to case per bridge | R <sub>thJC</sub>                 | DC operation                               | 1.7         | 1.4    | K/W                 |
| Maximum thermal resistance, case to heatsink            | R <sub>thCS</sub>                 | Mounting surface, smooth, flat and greased | 0.2         |        |                     |
| Approximate weight                                      |                                   |                                            | 16          |        | g                   |
| Mounting torque ± 10 %                                  |                                   | Bridge to heatsink                         | 2.0         |        | N · m<br>(lbf · in) |

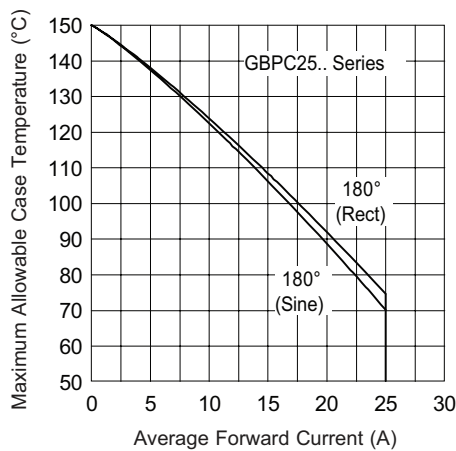


Fig. 1 - Current Ratings Characteristics

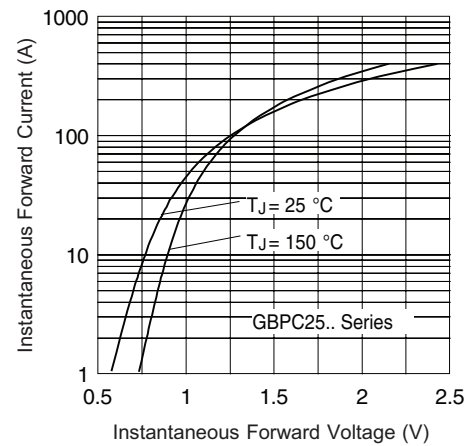


Fig. 2 - Forward Voltage Drop Characteristics

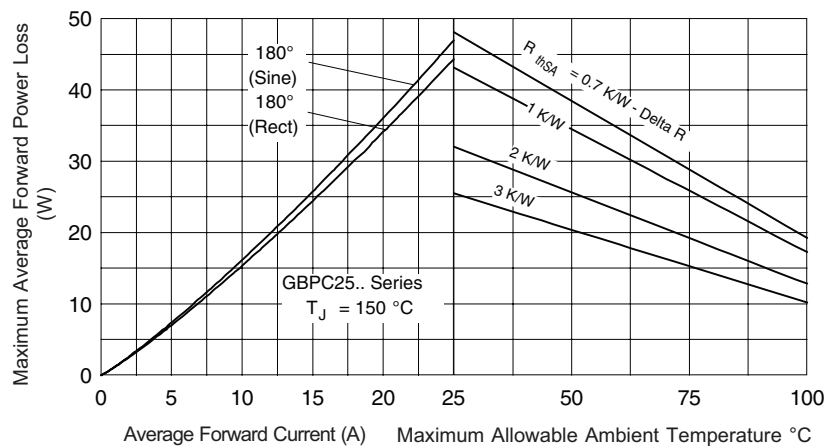


Fig. 3 - Total Power Loss Characteristics

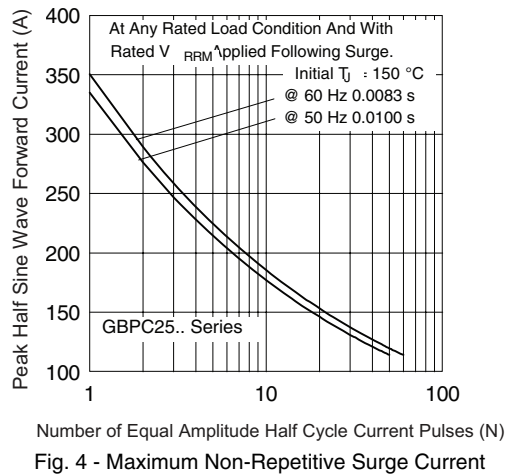


Fig. 4 - Maximum Non-Repetitive Surge Current

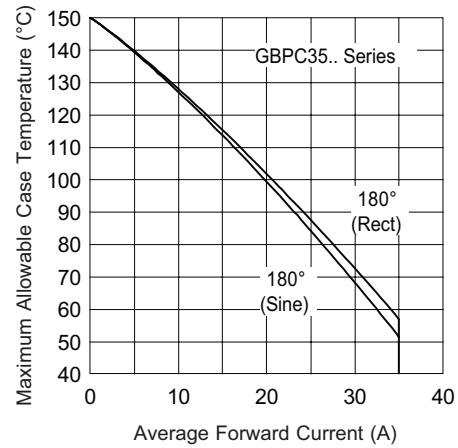


Fig. 6 - Current Ratings Characteristics

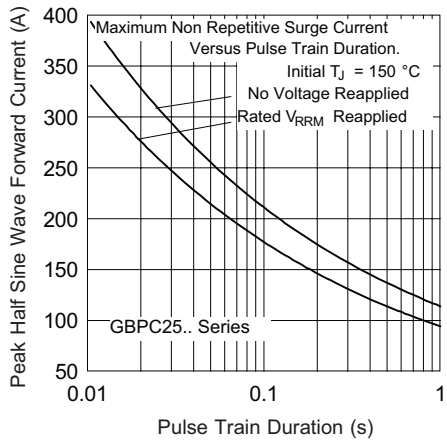


Fig. 5 - Maximum Non-Repetitive Surge Current

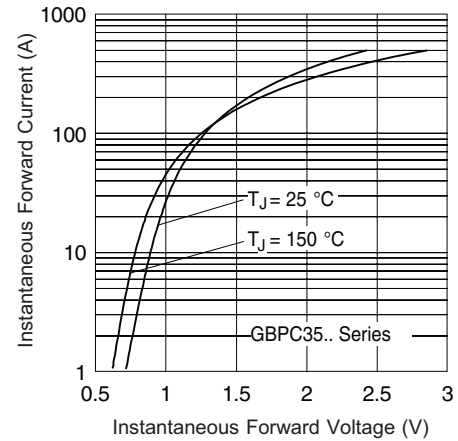


Fig. 7 - Forward Voltage Drop Characteristics

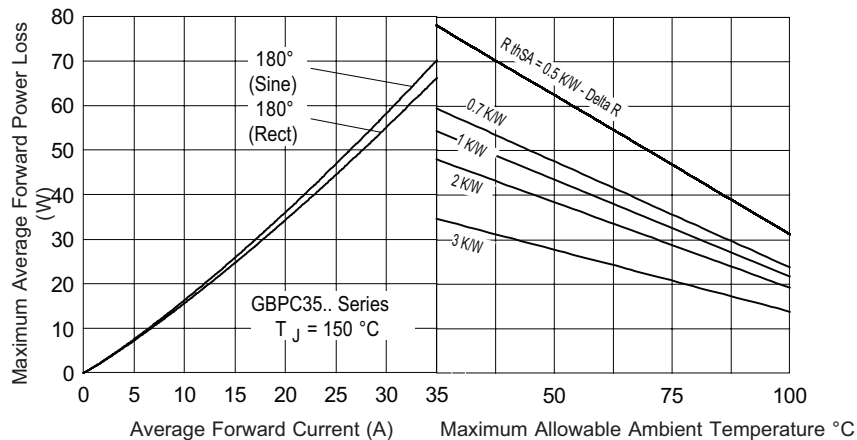


Fig. 8 - Total Power Loss Characteristics

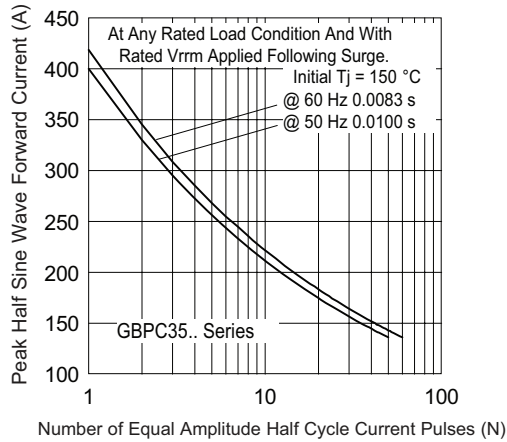


Fig. 9 - Maximum Non-Repetitive Surge Current

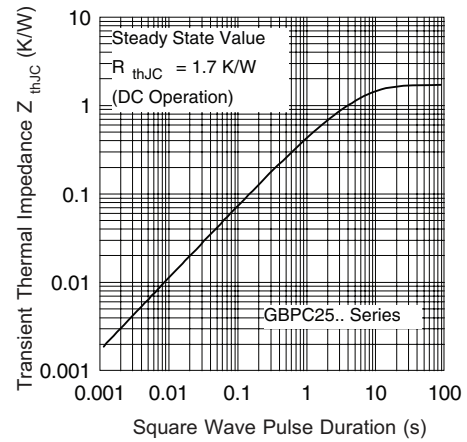


Fig. 11 - Thermal Impedance  $Z_{thJC}$  Characteristic

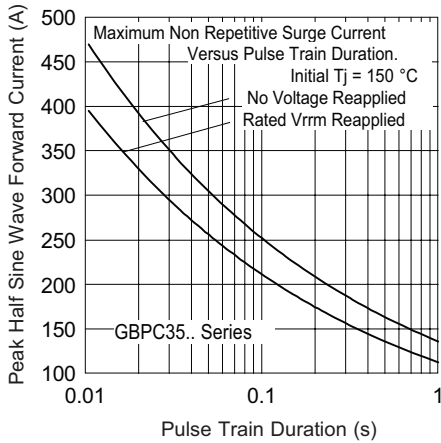


Fig. 10 - Maximum Non-Repetitive Surge Current

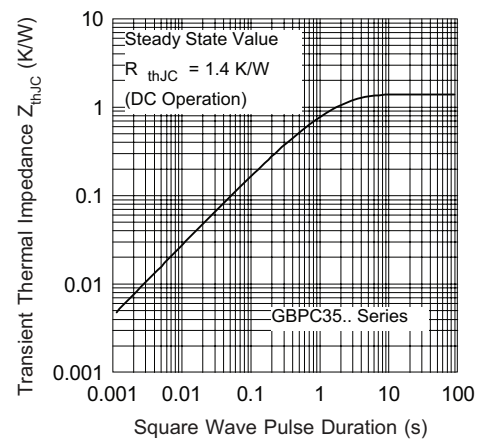


Fig. 12 - Thermal Impedance  $Z_{thJC}$  Characteristic

### ORDERING INFORMATION TABLE

Device code

|             |           |           |          |
|-------------|-----------|-----------|----------|
| <b>GBPC</b> | <b>35</b> | <b>12</b> | <b>A</b> |
| 1           | 2         | 3         | 4        |

**1** - Circuit configuration:  
Single phase bridge coding

**2** - Current rating code


**3** - Voltage code x 100 =  $V_{RRM}$

**4** - Diode bridge rectifier:

- A = Standard fast-on terminal
- W = Wire lead

25 = 25 A (average)  
35 = 35 A (average)


## CIRCUIT CONFIGURATION

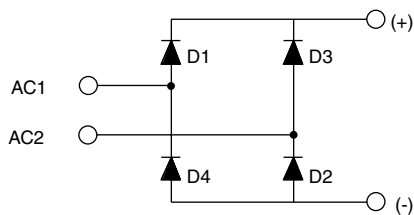


| LINKS TO RELATED DOCUMENTS |                                                                               |
|----------------------------|-------------------------------------------------------------------------------|
| Dimensions                 | <a href="http://www.vishay.com/doc?95331">http://www.vishay.com/doc?95331</a> |

## GBPC

### DIMENSIONS FOR GBPC...A in millimeters

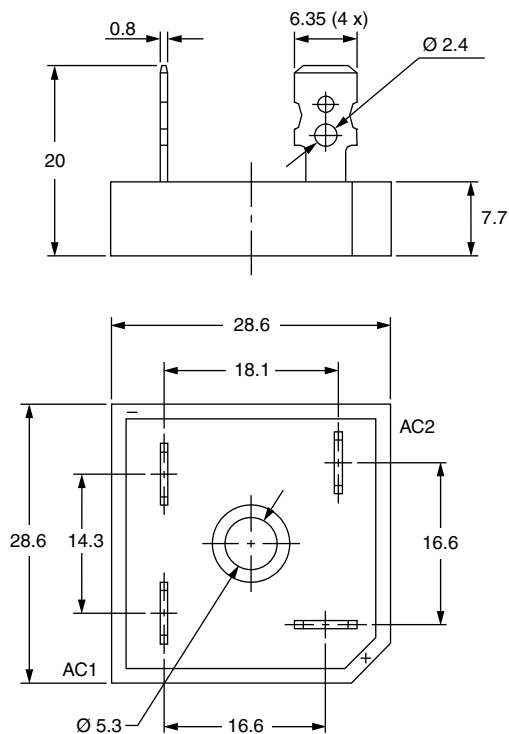

### DIMENSIONS FOR GBPC...W in millimeters

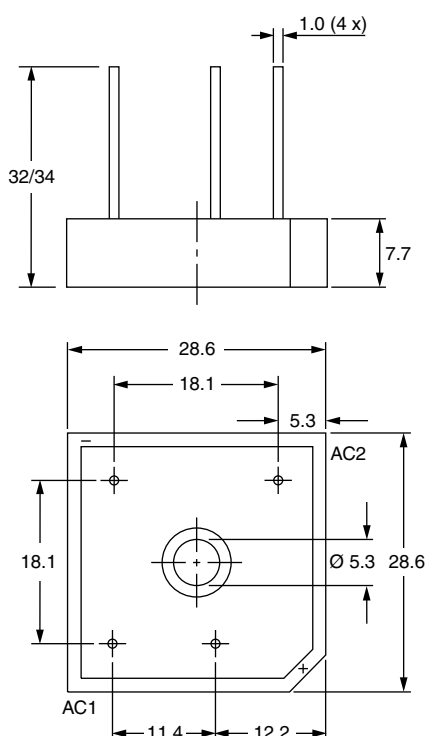



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)