

**DUAL GENERAL PURPOSE LOW VOLTAGE COMPARATOR****AZV393****General Description**

The AZV393 is a low voltage 2.5V to 5.5V, dual comparator, which has a very low supply current of 100 $\mu$ A, making the part an excellent choice for portable electronic systems. The device is pin-for-pin compatible replacement of the LMV393.

The AZV393 is built with BiCMOS process with bipolar input and output stages for improved noise performance. It is a cost-effective solution for portable consumer products where space, low voltage, low power and price are the primary specification in circuit design.

The AZV393 is available in standard SOIC-8 and space saving TSSOP-8 and MSOP-8 packages.

**Features**

- Guaranteed 2.5V to 5.5V Performance
- Industrial Temperature Range: -40°C to 85°C
- Low Supply Current: 100 $\mu$ A Typical
- Input Common Mode Voltage Range Includes Ground
- Low Output Saturation Voltage: 200mV Typical
- Open Collector Output for Maximal Flexibility

**Applications**

- Notebook and PDA
- Low Power, Low Voltage Applications
- General Purpose Portable Devices
- Mobile Communications
- Battery Powered Electronics



Figure 1. Package Types of AZV393

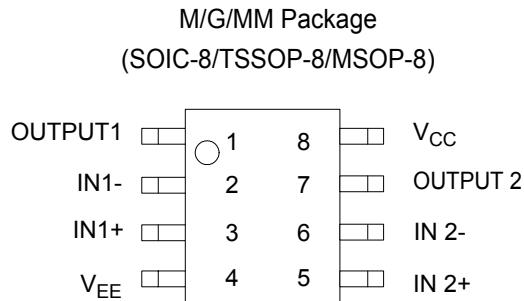
**DUAL GENERAL PURPOSE LOW VOLTAGE COMPARATOR****AZV393****Pin Configuration**

Figure 2. Pin Configuration of AZV393 (Top View)

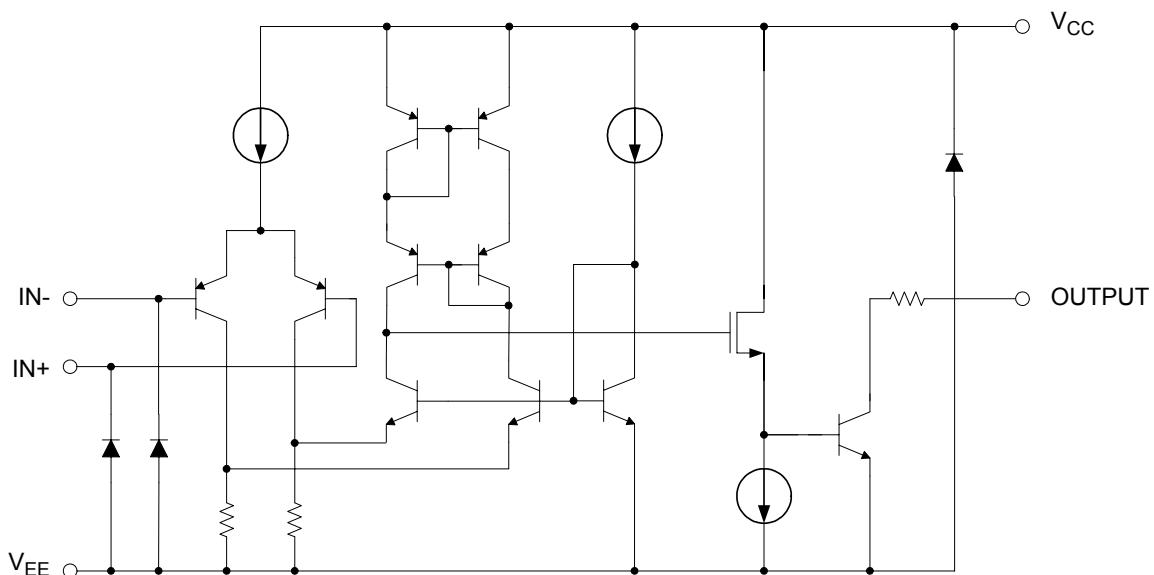
**Functional Block Diagram**


Figure 3. Functional Block Diagram of AZV393 (Each comparator)



## DUAL GENERAL PURPOSE LOW VOLTAGE COMPARATOR

AZV393
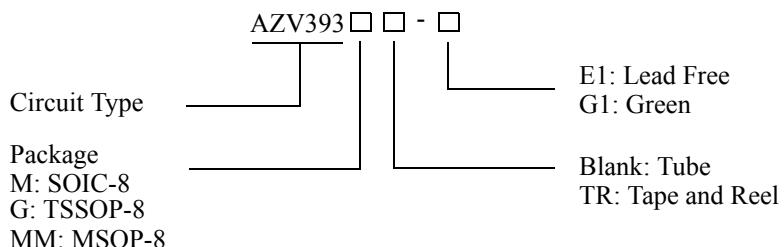
## **Ordering Information**



Package	Temperature Range	Part Number		Marking ID		Packing Type
		Lead Free	Green	Lead Free	Green	
SOIC-8	-40 to 85°C	AZV393M-E1	AZV393M-G1	AZV393M-E1	AZV393M-G1	Tube
		AZV393MTR-E1	AZV393MTR-G1	AZV393M-E1	AZV393M-G1	Tape & Reel
TSSOP-8	-40 to 85°C	AZV393G-E1	AZV393G-G1	EG3D	GG3D	Tube
		AZV393GTR-E1	AZV393GTR-G1	EG3D	GG3D	Tape & Reel
MSOP-8	-40 to 85°C	AZV393MM-E1	AZV393MM-G1	AZV393MM-E1	AZV393MM-G1	Tube
		AZV393MMTR-E1	AZV393MMTR-G1	AZV393MM-E1	AZV393MM-G1	Tape & Reel

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant. Products with "G1" suffix are available in green packages.

### Absolute Maximum Ratings (Note 1)

Parameter	Symbol	Value	Unit
Power Supply Voltage	V <sub>CC</sub>	6	V
Operation Junction Temperature	T <sub>J</sub>	150	°C
Storage Temperature Range	T <sub>STG</sub>	-65 to 150	°C
Lead Temperature (Soldering, 10 Seconds)	T <sub>LEAD</sub>	260	°C
ESD (Machine Model)		300	V
ESD (Human Body Model)		4000	V

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.



## DUAL GENERAL PURPOSE LOW VOLTAGE COMPARATOR

AZV393

## Recommended Operating Conditions

Parameter	Symbol	Min	Max	Unit
Supply Voltage	V <sub>CC</sub>	2.5	5.5	V
Ambient Operating Temperature Range	T <sub>A</sub>	-40	85	°C

## 2.7V DC Electrical Characteristics

Limits in standard typeface are guaranteed for T<sub>A</sub>=25°C, V<sub>CC</sub>=2.7V, V<sub>EE</sub>=0V, R<sub>L</sub>=5.1kΩ connected to V<sub>CC</sub> and V<sub>CM</sub>=0, **bold** typeface applies over full temperature ranges, unless otherwise specified.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input Offset Voltage	V <sub>OS</sub>	I <sub>IN</sub> <sup>+</sup> or I <sub>IN</sub> <sup>-</sup> with output in linear range, V <sub>CM</sub> =0V		1.7	7	mV
					9	
Input Offset Voltage Average Drift	TCV <sub>OS</sub>			5		µV/°C
Input Bias Current	I <sub>B</sub>	I <sub>IN</sub> <sup>+</sup> - I <sub>IN</sub> <sup>-</sup> , V <sub>CM</sub> =0V		10	250	nA
					400	
Input Offset Current	I <sub>IO</sub>	I <sub>IN</sub> <sup>+</sup> - I <sub>IN</sub> <sup>-</sup> , V <sub>CM</sub> =0V		5	50	nA
					150	
Saturation Voltage	V <sub>SAT</sub>	I <sub>SINK</sub> ≤1mA		200		mV
					500	
Output Sink Current	I <sub>SINK</sub>	V <sub>O</sub> ≤1.5V	5	23		mA
Input Common-Mode Voltage Range	V <sub>CM</sub>		-0.1		2	V
Supply Current	I <sub>CC</sub>			70	150	µA
					200	
Output Leakage Current	I <sub>LEAKAGE</sub>			0.003		µA

## 2.7V AC Electrical Characteristics

All limits are guaranteed for T<sub>A</sub>=25°C, V<sub>CC</sub>=2.7V, V<sub>EE</sub>=0V, R<sub>L</sub>=5.1kΩ connected to V<sub>CC</sub> and V<sub>CM</sub>=0, unless otherwise specified.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Propagation Delay (High to Low)	T <sub>PHL</sub>	Input Overdrive=10mV		1000		ns
		Input Overdrive=100mV		350		
Propagation Delay (Low to High)	T <sub>PLH</sub>	Input Overdrive=10mV		500		ns
		Input Overdrive=100mV		400		



## DUAL GENERAL PURPOSE LOW VOLTAGE COMPARATOR

AZV393

## 5V DC Electrical Characteristics

Limits in standard typeface are guaranteed for  $T_A=25^\circ\text{C}$ ,  $V_{CC}=5\text{V}$ ,  $V_{EE}=0\text{V}$ ,  $R_L=5.1\text{k}\Omega$  connected to  $V_{CC}$  and  $V_{CM}=0$ , **bold** typeface applies over full temperature ranges, unless otherwise specified.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input Offset Voltage	$V_{OS}$			1.7	7	mV
					<b>9</b>	
Input Offset Voltage Average Drift	$TCV_{OS}$			5		$\mu\text{V}/^\circ\text{C}$
Input Bias Current	$I_B$	$I_{IN^+}$ or $I_{IN^-}$ with output in linear range, $V_{CM}=0\text{V}$		25	250	nA
					<b>400</b>	
Input Offset Current	$I_{IO}$	$I_{IN^+} - I_{IN^-}$ , $V_{CM}=0\text{V}$		2	50	nA
					<b>150</b>	
Saturation Voltage	$V_{SAT}$	$I_{SINK} \leq 4\text{mA}$		200	400	mV
					<b>500</b>	
Output Sink Current	$I_{SINK}$	$V_O \leq 1.5\text{V}$	10	84		mA
Input Common-Mode Voltage Range	$V_{CM}$		-0.1		4.2	V
Voltage Gain	$A_V$		20	50		$\text{V}/\text{mV}$
Supply Current	$I_{CC}$			100	200	$\mu\text{A}$
					<b>250</b>	
Output Leakage Current	$I_{LEAKAGE}$			0.003		$\mu\text{A}$

## 5V AC Electrical Characteristics

All limits are guaranteed for  $T_A=25^\circ\text{C}$ ,  $V_{CC}=5\text{V}$ ,  $V_{EE}=0\text{V}$ ,  $R_L=5.1\text{k}\Omega$  connected to  $V_{CC}$  and  $V_{CM}=0$ , unless otherwise specified.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Propagation Delay (High to Low)	$T_{PHL}$	Input Overdrive=10mV		600		ns
		Input Overdrive=100mV		200		
Propagation Delay (Low to High)	$T_{PLH}$	Input Overdrive=10mV		450		ns
		Input Overdrive=100mV		300		

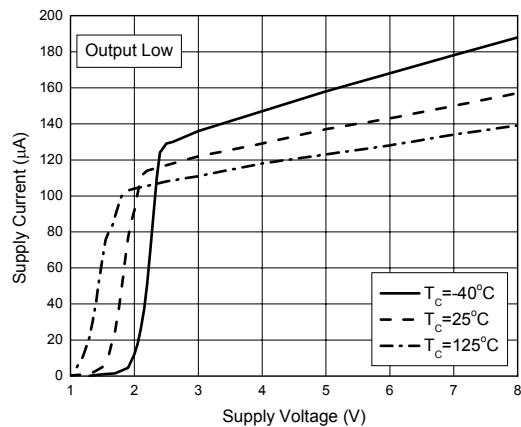
**DUAL GENERAL PURPOSE LOW VOLTAGE COMPARATOR**
**AZV393**
**Typical Performance Characteristics**
 $T_A = 25^\circ\text{C}$ , unless otherwise specified.


Figure 4. Supply Current vs. Supply Voltage

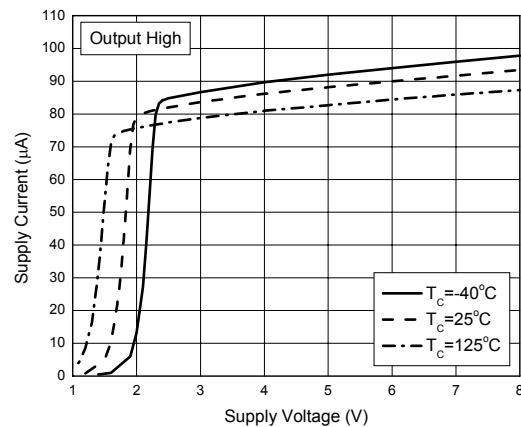


Figure 5. Supply Current vs. Supply Voltage

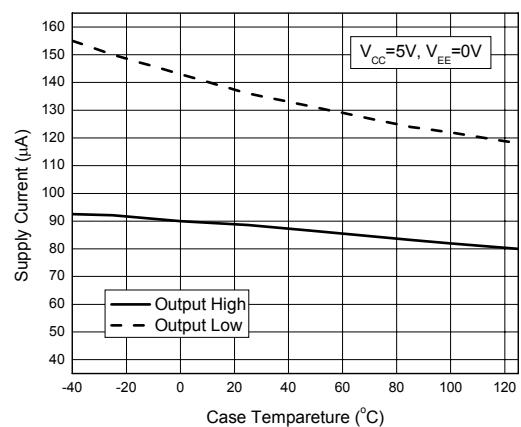


Figure 6. Supply Current vs. Case Temperature

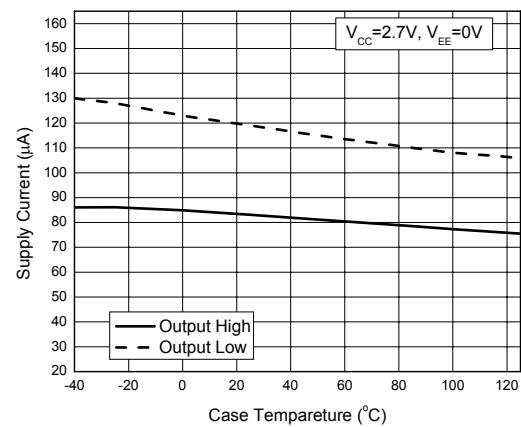


Figure 7. Supply Current vs. Case Temperature

## DUAL GENERAL PURPOSE LOW VOLTAGE COMPARATOR

AZV393

## Typical Performance Characteristics (Continued)

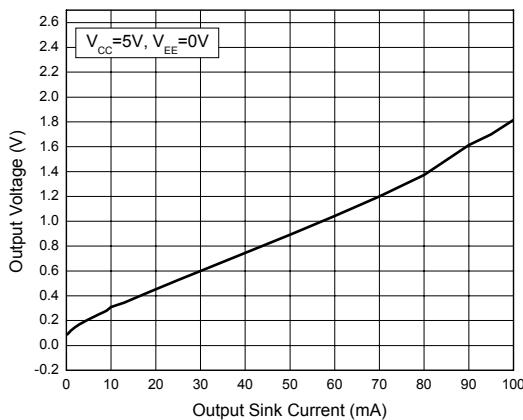
 $T_A=25^\circ\text{C}$ , unless otherwise specified.


Figure 8. Output Voltage vs. Output Sink Current

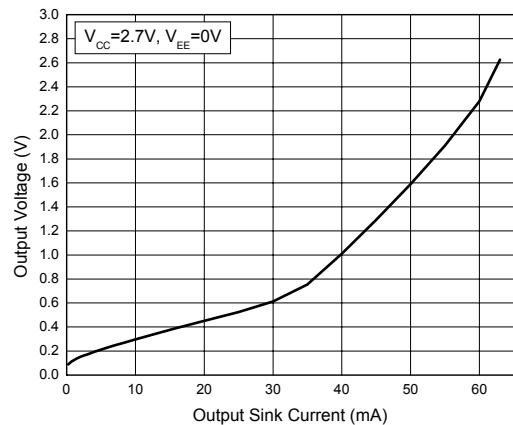


Figure 9. Output Voltage vs. Output Sink Current

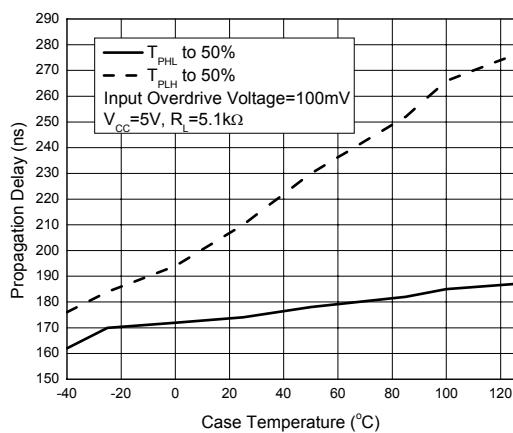


Figure 10. Propagation Delay vs. Temperature

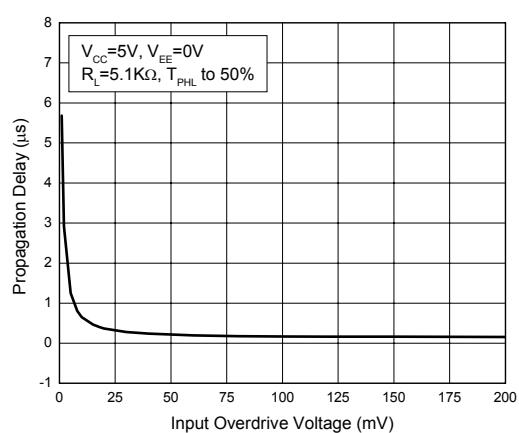


Figure 11. Propagation Delay vs. Input Overdrive Voltage

## DUAL GENERAL PURPOSE LOW VOLTAGE COMPARATOR

AZV393

## Typical Performance Characteristics (Continued)

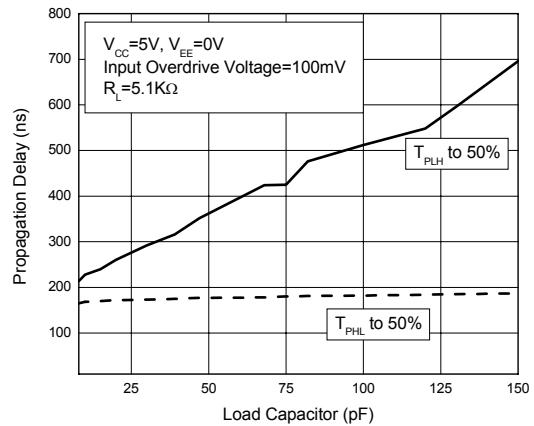
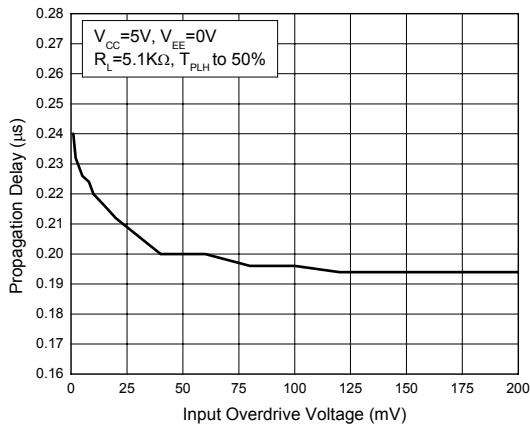
 $T_A=25^\circ\text{C}$ , unless otherwise specified.


Figure 12. Propagation Delay vs. Input Overdrive Voltage   Figure 13. Propagation Delay vs. Load Capacitor

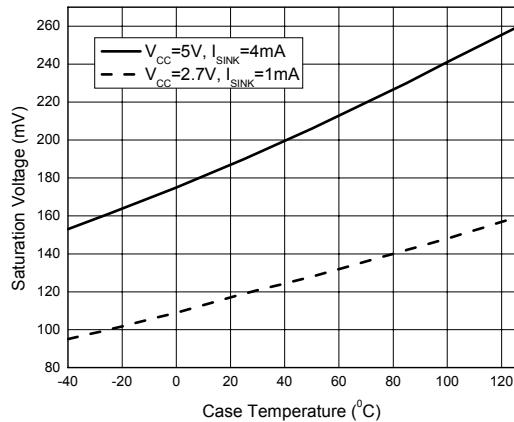


Figure 14. Saturation Voltage vs. Case Temperature

## DUAL GENERAL PURPOSE LOW VOLTAGE COMPARATOR

AZV393

## Typical Performance Characteristics (Continued)

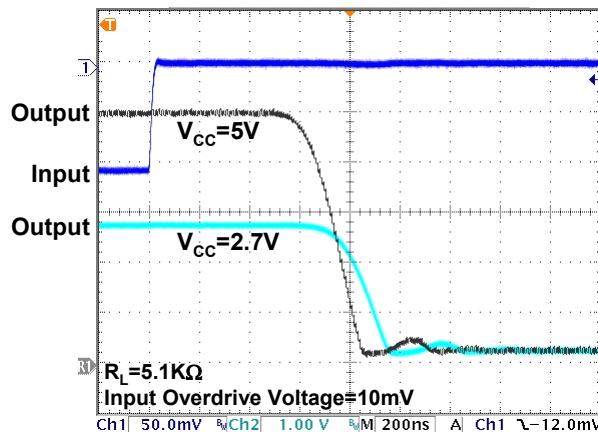
 $T_A=25^\circ\text{C}$ , unless otherwise specified.


Figure 15. Response Time for Positive Transition

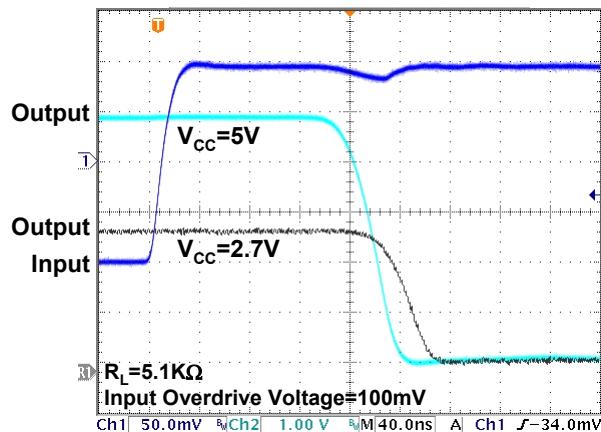


Figure 16. Response Time for Positive Transition

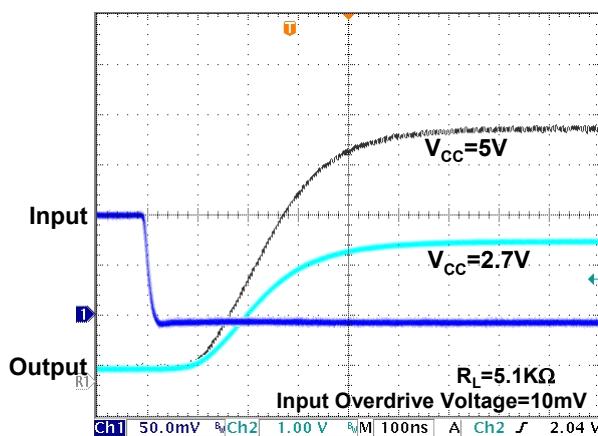


Figure 17. Response Time for Negative Transition

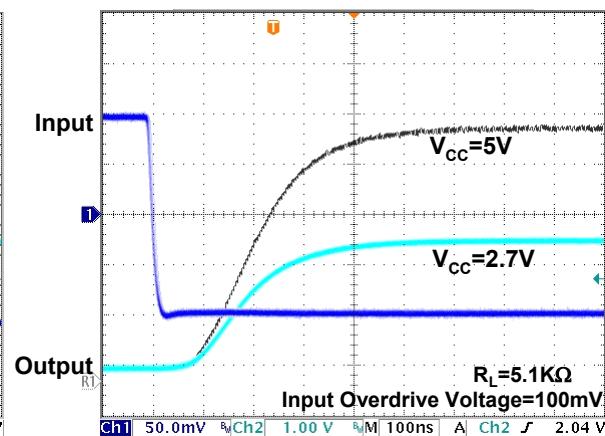


Figure 18. Response Time for Negative Transition

## DUAL GENERAL PURPOSE LOW VOLTAGE COMPARATOR

AZV393

## Typical Performance Characteristics (Continued)

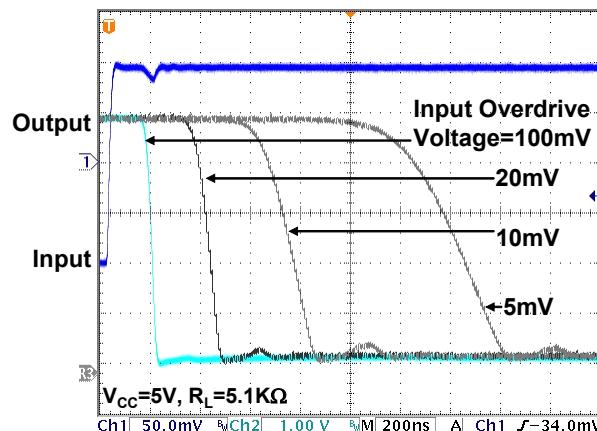
 $T_A=25^\circ\text{C}$ , unless otherwise specified.


Figure 19. Response Time for Positive Transition

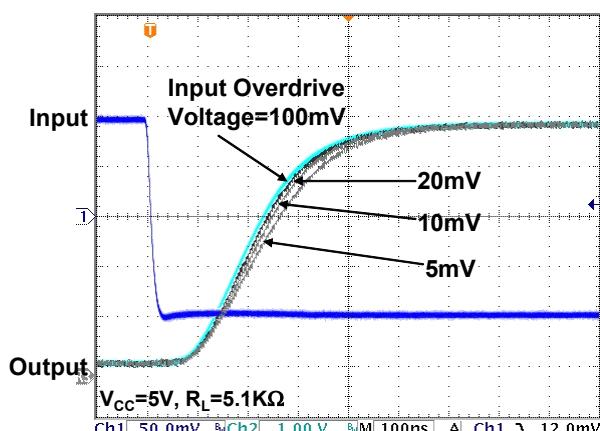


Figure 20. Response Time for Negative Transition

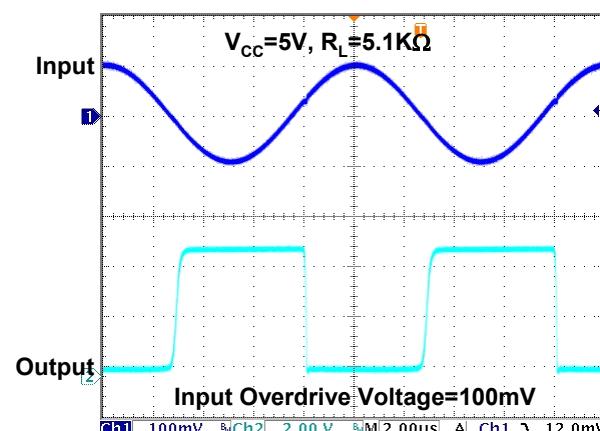


Figure 21. 100kHz Response

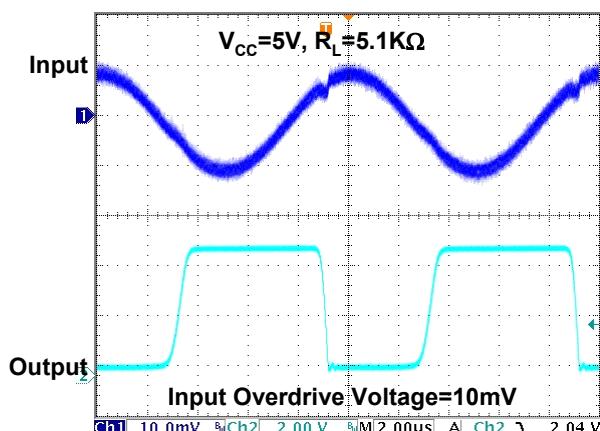


Figure 22. 100kHz Response

## DUAL GENERAL PURPOSE LOW VOLTAGE COMPARATOR

AZV393

## Typical Performance Characteristics (Continued)


 $T_A = 25^\circ\text{C}$ , unless otherwise specified.

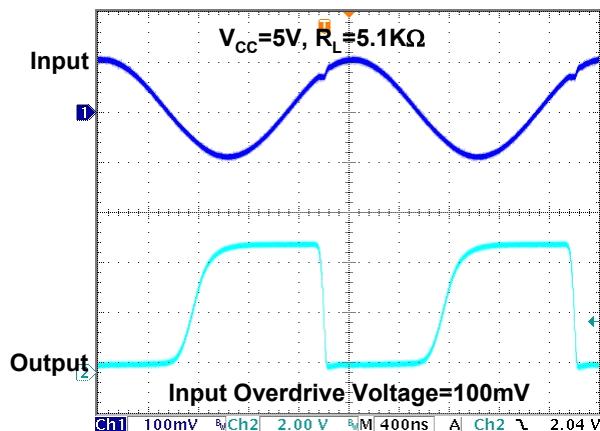
Figure 23. 500kHz Response

## Typical Applications

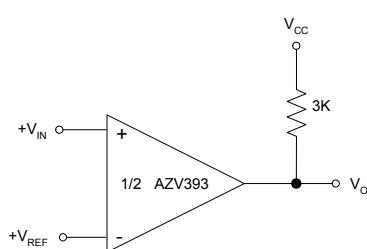


Figure 24. Basic Comparator

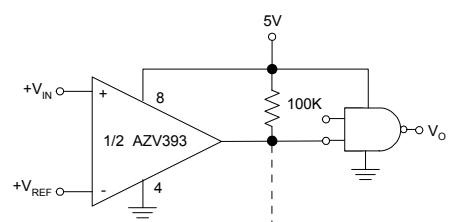


Figure 25. Driving CMOS

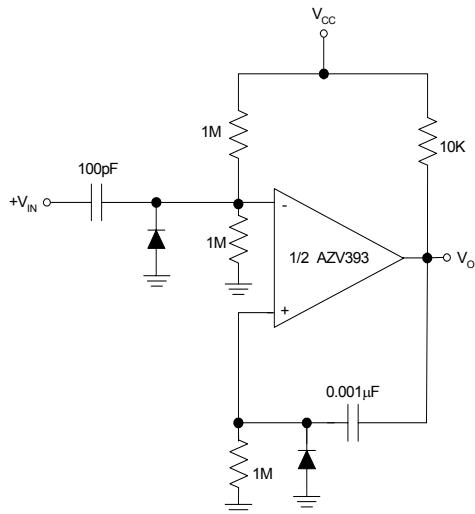
**DUAL GENERAL PURPOSE LOW VOLTAGE COMPARATOR**
**AZV393**
**Typical Applications (Continued)**


Figure 26. One Shot Multivibrator

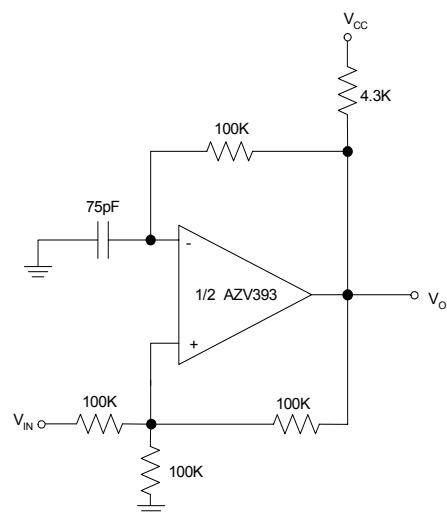


Figure 27. Squarewave Oscillator


## DUAL GENERAL PURPOSE LOW VOLTAGE COMPARATOR

AZV393

## Mechanical Dimensions

SOIC-8

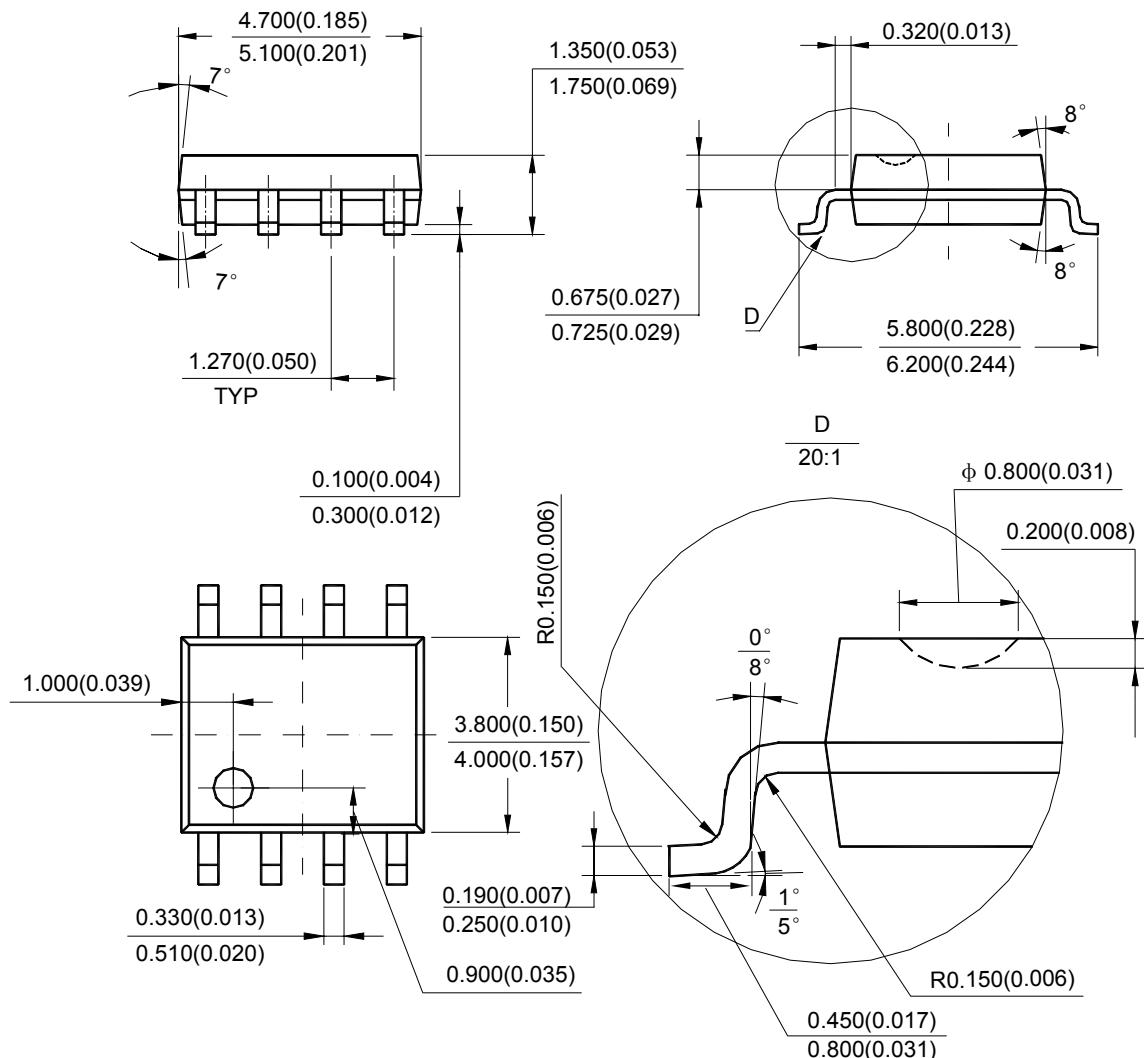Unit: mm(inch)



Note: Eject hole, oriented hole and mold mark is optional.


## DUAL GENERAL PURPOSE LOW VOLTAGE COMPARATOR

AZV393


## Mechanical Dimensions (Continued)

TSSOP-8

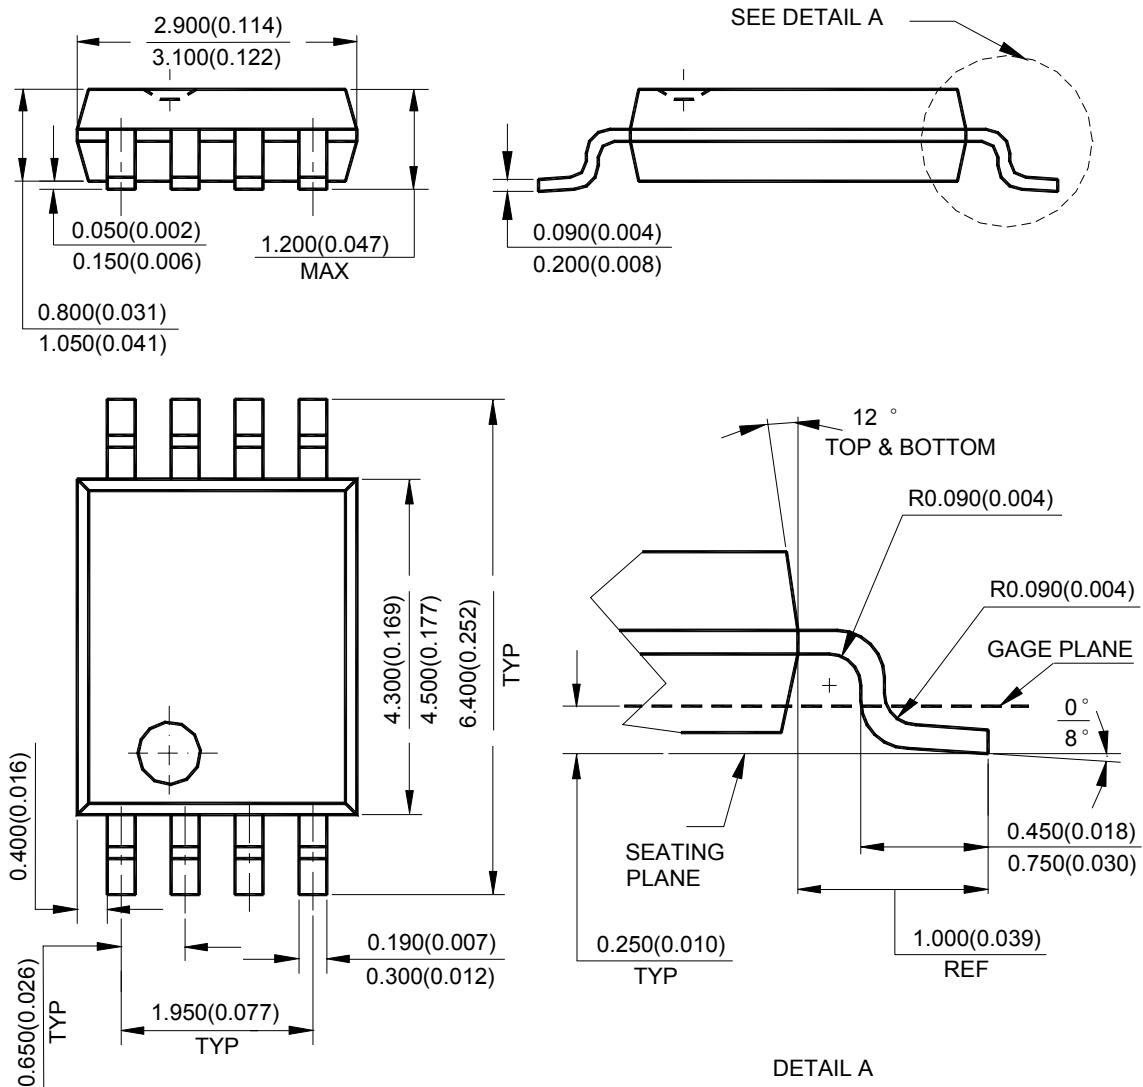Unit: mm(inch)



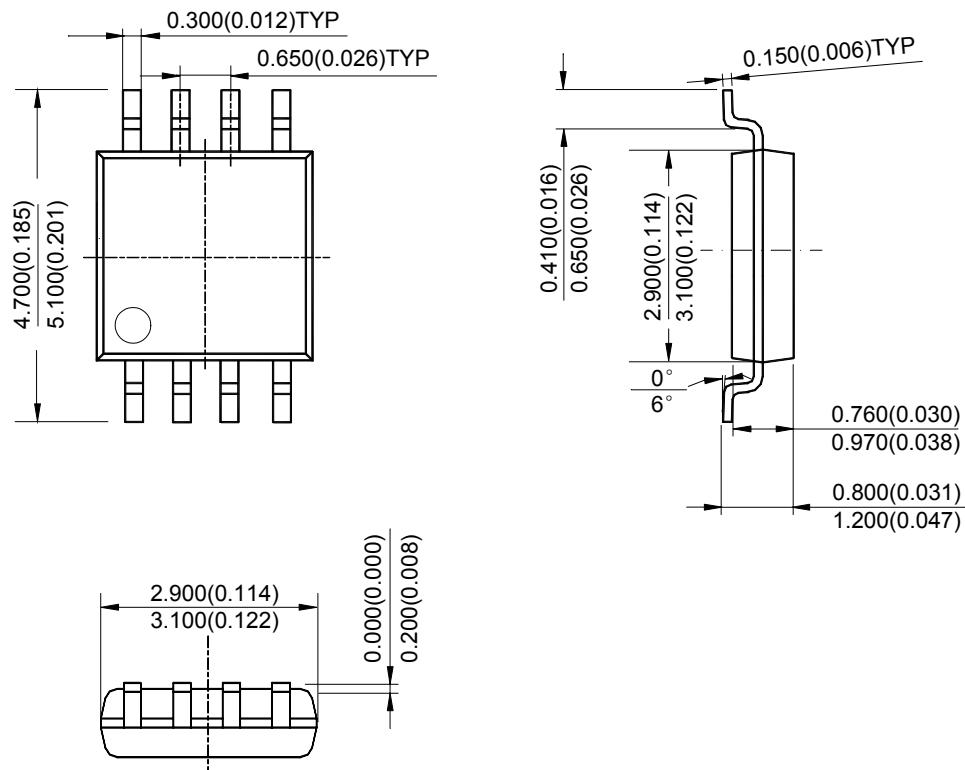Note: Eject hole, oriented hole and mold mark is optional.

**DUAL GENERAL PURPOSE LOW VOLTAGE COMPARATOR****AZV393****Mechanical Dimensions (Continued)****MSOP-8****Unit: mm(inch)**

Note: Eject hole, oriented hole and mold mark is optional.



## BCD Semiconductor Manufacturing Limited

<http://www.bcdsemi.com>

### IMPORTANT NOTICE

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

---

#### MAIN SITE

##### - Headquarters

##### BCD Semiconductor Manufacturing Limited

No. 1600, Zi Xing Road, Shanghai ZiZhu Science-based Industrial Park, 200241, China  
Tel: +86-21-24162266, Fax: +86-21-24162277

##### - Wafer Fab

##### Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.

800 Yi Shan Road, Shanghai 200233, China  
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

---

#### REGIONAL SALES OFFICE

##### Shenzhen Office

Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office  
Room E, 5F, Noble Center, No.1006, 3rd Fuzhong Road, Futian District, Shenzhen,  
518026, China  
Tel: +86-755-8826 7951  
Fax: +86-755-8826 7865

##### Taiwan Office

BCD Semiconductor (Taiwan) Company Limited  
4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei,  
Taiwan  
Tel: +886-2-2656 2808  
Fax: +886-2-2656 2806

##### USA Office

BCD Semiconductor Corp.  
30920 Huntwood Ave. Hayward,  
CA 94544, USA  
Tel : +1-510-324-2988  
Fax: +1-510-324-2788

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru