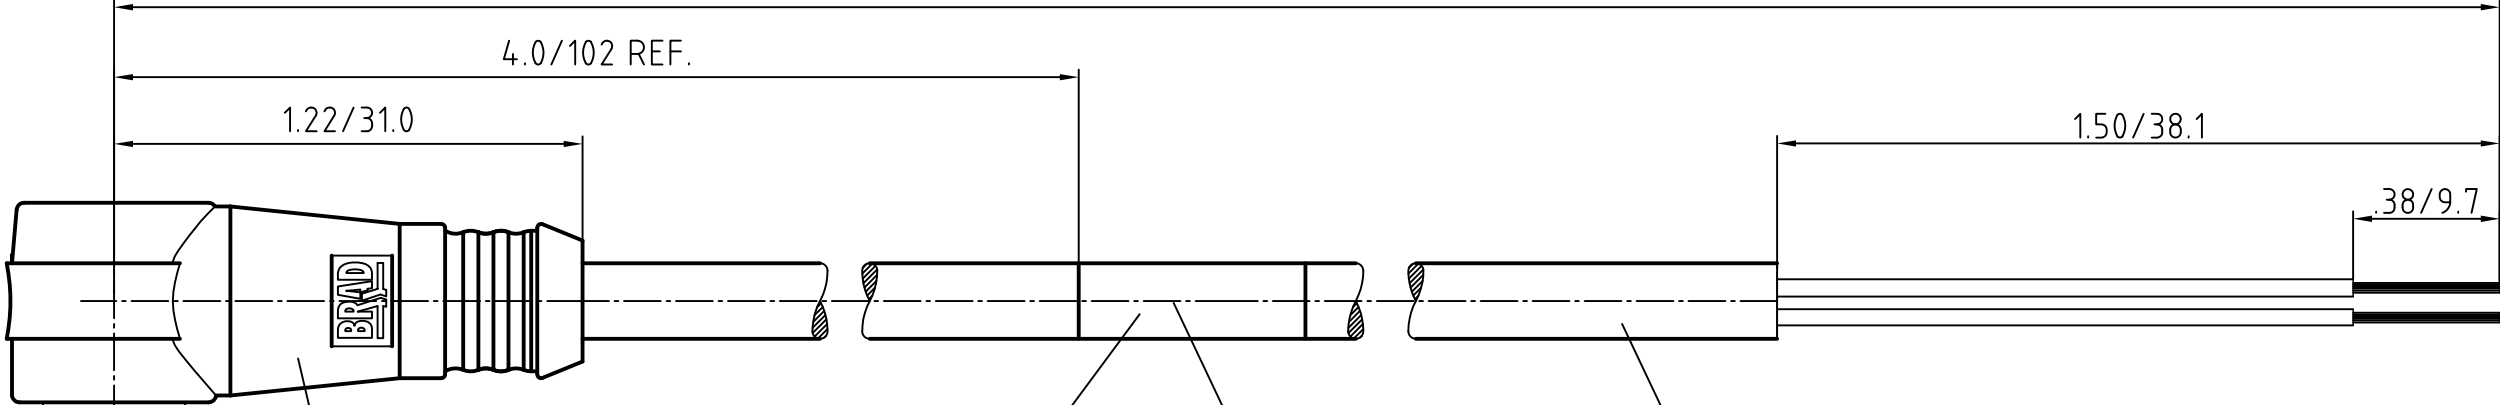
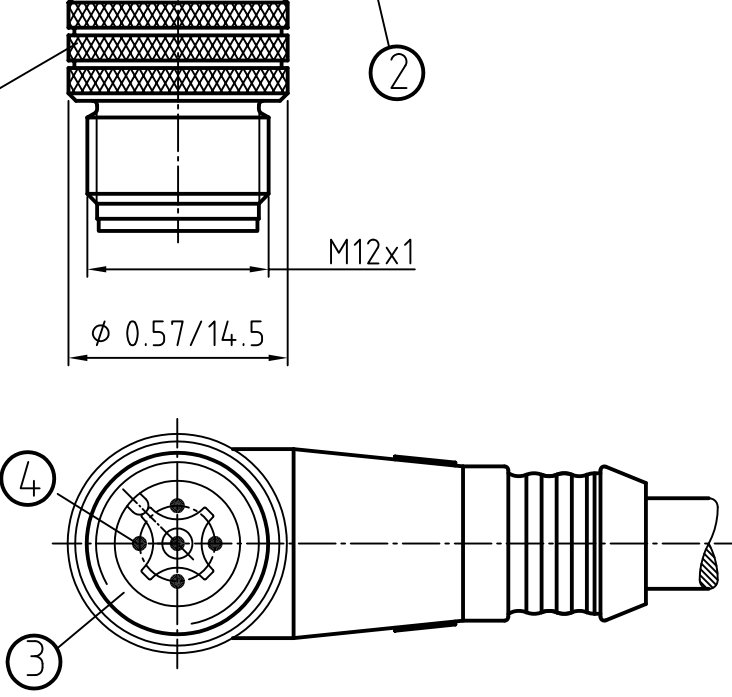





F
E
D
C
B
A

10	9	8	7	6	5	4	3	2	1
FINISHED LENGTH (SEE TABLE)									
									
									
CONNECTOR SPECIFICATION:									
VOLTAGE RATING		250 VAC/VDC							
AMPERAGE RATING		max. 4 AMPS							
PROTECTION		IP67							
OPERATING TEMPERATURE		-20°C TO 105°C							
UL CERTIFICATIONS		UL RECOGNIZED, FILE NO. E152210							
ASSEMBLY IS		RoHS COMPLIANT							
ITEM	COMPONENT	MATERIAL	FINISH						
6	LABLE	MYLAR	BLACK/YELLOW						
5	COUPLER	BRASS	NICKEL PLATED						
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL						
3	INSERT	NYLON	BLACK						
2	OVERMOLD	POLYURETHANE (PUR)	YELLOW						
1	CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	JACKET: PVC	JACKET: YELLOW						

PRINTING
OR
LABEL

MALE FACE VIEW

3-POLE	4-POLE	5-POLE
		
WIRING DIAGRAM		
1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK 5 GREY

DESCRIPTION EC NO: WEU2010-0261 DRWN: LSTEMMLE 2010/01/13 CHKD: RE APPR: NSTAUDIG 2010/01/25	QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION			
			mm	INCH	DRAWN BY _____ DATE _____		MICRO-CHANGE CORDSET 3/4/5-P. M 90 SINGLE KEY 22/3-5 YELLOW PVC CABLE					
		4 PLACES	±---	±---	CHECKED BY _____ DATE _____							
		3 PLACES	±---	±---	RE _____ 2010/01/14							
		2 PLACES	±---	±.01	APPROVED BY _____ DATE _____		molex MOLEX INCORPORATED					
		1 PLACE	±0.3	±---	NSTAUDIG 2010/01/25							
		ANGULAR ± --- °			MATERIAL NO.						DOCUMENT NO.	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE SHEET 2		SD-120065-029				1 OF 1	
					SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

F
E
D
C
B
A

F

E

D

C

B

A

F

E

D

C

B

A

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200651497	803007A09M020	6.56' +3.5" -0 [2.0M +89 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200651662	804007A09M020	6.56' +3.5" -0 [2.0M +89 -0]
4	1200651665	804007A09M040	13.12' +6.5" -0 [4.0M +165 -0]
4	1200651666	804007A09M050	16.40' +6.5" -0 [5.0M +165 -0]
4	1200651668	804007A09M060	19.69' +6.5" -0 [6.0M +165 -0]
4	1200651669	804007A09M100	32.81' +12.5" -0 [10.0M +318 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200651724	805007A09M020	6.56' +3.5" -0 [2.0M +89 -0]
5	1200651726	805007A09M040	13.12' +6.5" -0 [4.0M +165 -0]
5	1200651727	805007A09M050	16.40' +6.5" -0 [5.0M +165 -0]
5	1200651728	805007A09M060	19.69' +6.5" -0 [6.0M +165 -0]
5	1200652123	805007A09M100	32.81' +12.5" -0 [10.0M +318 -0]

DESCRIPTION EC NO: WEU2010-0261 DRWN: LSTEMMLE 2010/01/13 CHKD: RE APPR: NSTAUDIG 2010/01/25	DESCRIPTION REV	QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY DATE		MICRO-CHANGE CORDSET 3/4/5-P. M 90 SINGLE KEY 22/3-5 YELLOW PVC CABLE			
			4 PLACES	± ---	± ---	----					
			3 PLACES	± ---	± ---	CHECKED BY DATE					
			2 PLACES	± ---	± .01	RE 2010/01/14		MOLEX INCORPORATED			
			1 PLACE	± 0.3	± ---	APPROVED BY DATE					
			ANGULAR ± --- °			NSTAUDIG 2010/01/25					
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
						SEE TABLE		SD-120065-029		1 OF 1	
						SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru