

## Surface Mount Type

## SP-Cap

Series : **CS, CT, CX**




### Features

- High voltage (35 V.DC max.)
- Low profile (Height 1.0 mm max.)
- High ripple current (5600 mAr.m.s. max.)
- RoHS compliance, Halogen free

### Specifications

| Series                     | CS                                                                                                  | CT                                                                                                   | CX                         |              |
|----------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|----------------------------|--------------|
| Category temp. range       | -55 °C to +105 °C                                                                                   |                                                                                                      |                            |              |
| Rated voltage range        | 4 V.DC to 35 V.DC                                                                                   |                                                                                                      | 2 V.DC to 35 V.DC          |              |
| Nominal cap.range          | 10 μF to 120 μF                                                                                     | 15 μF to 180 μF                                                                                      | 15 μF to 560 μF            |              |
| Capacitance tolerance      | ±20 % (120 Hz / + 20 °C)                                                                            |                                                                                                      |                            |              |
| DC leakage current         | I ≤ 0.1 CV (μA) [2 V.DC to 6.3 V.DC, 2 minutes], I ≤ 0.3 CV (μA) [10 V.DC to 35 V.DC, 2 minutes]    |                                                                                                      |                            |              |
| Dissipation factor (tan δ) | ≤ 0.06 (120 Hz / + 20 °C)                                                                           |                                                                                                      |                            |              |
| Surge voltage (V.DC)       | Rated voltage × 1.25 [2 V.DC to 16 V.DC], × 1.15 [20 V.DC to 35 V.DC] (15 °C to 35 °C)              |                                                                                                      |                            |              |
| Endurance                  | +105 °C, 2000 h, rated voltage applied                                                              |                                                                                                      |                            |              |
|                            | Capacitance change                                                                                  | Within ±20 % of the initial value                                                                    |                            |              |
|                            | tan δ                                                                                               | ≤ 2 times of the initial limit                                                                       |                            |              |
|                            | DC leakage current                                                                                  | 2 V.DC to 6.3 V DC : ≤ 3 times of the initial limit<br>10 V.DC to 35 V.DC : Within the initial limit |                            |              |
| Damp heat (Steady state)   | +60 °C, 90 %, 500 h, No-applied voltage                                                             |                                                                                                      |                            |              |
|                            | Capacitance change of initial measurd value                                                         | 2 V.DC to 2.5 V.DC                                                                                   | 4 V.DC, 10 V.DC to 35 V.DC | 6.3 V.DC     |
|                            |                                                                                                     | +70 %, -20 %                                                                                         | +60 %, -20 %               | +50 %, -20 % |
|                            | tan δ                                                                                               | ≤ 2 times of the initial limit                                                                       |                            |              |
| DC leakage current         | 2 V.DC to 6.3 V.DC : Within the initial limit<br>10 V.DC to 35V DC : ≤ 3 times of the initial limit |                                                                                                      |                            |              |


### Marking



Rated voltage mark

|   |          |   |          |   |         |
|---|----------|---|----------|---|---------|
| d | 2 V.DC   | j | 6.3 V.DC | D | 20 V.DC |
| e | 2.5 V.DC | A | 10 V.DC  | E | 25 V.DC |
| g | 4 V.DC   | C | 16 V.DC  | V | 35 V.DC |

### Dimensions (not to scale)

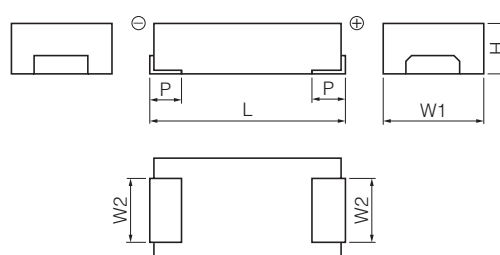

Unit : mm

| Series | L±0.2 | W1±0.2 | W2±0.1 | H±0.1 | P±0.3 |
|--------|-------|--------|--------|-------|-------|
| CS     | 7.3   | 4.3    | 2.4    | 1.1   | 1.3   |
| CT     | 7.3   | 4.3    | 2.4    | 1.4   | 1.3   |
| CX     | 7.3   | 4.3    | 2.4    | 1.9   | 1.3   |

\* Externals of figure are the reference.

## Characteristics list

Reflow \*3

&lt;Standard&gt;

| Series | Rated voltage (V.DC) | Capacitance (±20 %) (μF) | Case size (mm) |     |     | Specification                    |                     | Part number | Min.*4 Packaging Q'ty (pcs) |
|--------|----------------------|--------------------------|----------------|-----|-----|----------------------------------|---------------------|-------------|-----------------------------|
|        |                      |                          | L              | W   | H   | *1<br>Ripple current (mA r.m.s.) | *2<br>ESR (mΩ max.) |             |                             |
| CS     | 4                    | 120                      | 7.3            | 4.3 | 1.1 | 5100                             | 15                  | EEFCS0G121R | 3500                        |
|        | 6.3                  | 68                       | 7.3            | 4.3 | 1.1 | 5100                             | 15                  | EEFCS0J680R | 3500                        |
|        | 10                   | 47                       | 7.3            | 4.3 | 1.1 | 3200                             | 40                  | EEFCS1A470R | 3500                        |
|        | 16                   | 15                       | 7.3            | 4.3 | 1.1 | 3200                             | 40                  | EEFCS1C150R | 3500                        |
|        |                      | 22                       | 7.3            | 4.3 | 1.1 | 3200                             | 40                  | EEFCS1C220R | 3500                        |
|        |                      | 33                       | 7.3            | 4.3 | 1.1 | 3200                             | 40                  | EEFCS1C330R | 3500                        |
|        | 20                   | 10                       | 7.3            | 4.3 | 1.1 | 3200                             | 40                  | EEFCS1D100R | 3500                        |
|        |                      | 15                       | 7.3            | 4.3 | 1.1 | 3200                             | 40                  | EEFCS1D150R | 3500                        |
|        |                      | 22                       | 7.3            | 4.3 | 1.1 | 3200                             | 40                  | EEFCS1D220R | 3500                        |
|        | 25                   | 10                       | 7.3            | 4.3 | 1.1 | 3200                             | 40                  | EEFCS1E100R | 3500                        |
|        |                      | 15                       | 7.3            | 4.3 | 1.1 | 3200                             | 40                  | EEFCS1E150R | 3500                        |
| CT     | 35                   | 10                       | 7.3            | 4.3 | 1.1 | 3200                             | 40                  | EEFCS1V100R | 3500                        |
|        | 4                    | 180                      | 7.3            | 4.3 | 1.4 | 5100                             | 15                  | EEFCT0G181R | 3500                        |
|        | 6.3                  | 100                      | 7.3            | 4.3 | 1.4 | 5100                             | 15                  | EEFCT0J101R | 3500                        |
|        | 10                   | 68                       | 7.3            | 4.3 | 1.4 | 3200                             | 40                  | EEFCT1A680R | 3500                        |
|        | 16                   | 47                       | 7.3            | 4.3 | 1.4 | 3200                             | 40                  | EEFCT1C470R | 3500                        |
|        | 20                   | 33                       | 7.3            | 4.3 | 1.4 | 3200                             | 40                  | EEFCT1D330R | 3500                        |
|        |                      | 47                       | 7.3            | 4.3 | 1.4 | 3200                             | 40                  | EEFCT1D470R | 3500                        |
|        | 25                   | 22                       | 7.3            | 4.3 | 1.4 | 3200                             | 40                  | EEFCT1E220R | 3500                        |
|        | 35                   | 15                       | 7.3            | 4.3 | 1.4 | 3200                             | 40                  | EEFCT1V150R | 3500                        |

\*1: Ripple current (100 kHz/ +45°C ), \*2: ESR (100 kHz/+20 °C)

\*3: Please refer to the page of "Mounting Specifications".

\*4: Please contact us when 500 pcs packing is necessary.

## Characteristics list

Reflow <sup>\*3</sup> <Standard>

| Series | Rated voltage (V.DC) | Capacitance (±20 %) (μF) | Case size (mm) |     |     | Specification                            |                             | Part number  | Min. <sup>*4</sup> Packaging Q'ty (pcs) |
|--------|----------------------|--------------------------|----------------|-----|-----|------------------------------------------|-----------------------------|--------------|-----------------------------------------|
|        |                      |                          | L              | W   | H   | <sup>*1</sup> Ripple current (mA r.m.s.) | <sup>*2</sup> ESR (mΩ max.) |              |                                         |
| CX     | 2                    | 220                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0D221R  | 3500                                    |
|        |                      | 270                      | 7.3            | 4.3 | 1.9 | 5600                                     | 12                          | EEFCX0D271XR | 3500                                    |
|        |                      | 330                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0D331R  | 3500                                    |
|        |                      |                          | 7.3            | 4.3 | 1.9 | 5600                                     | 12                          | EEFCX0D331XR | 3500                                    |
|        |                      | 390                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0D391R  | 3500                                    |
|        |                      | 470                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0D471R  | 3500                                    |
|        | 2.5                  | 560                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0D561R  | 3500                                    |
|        |                      | 220                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0E221R  | 3500                                    |
|        |                      | 330                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0E331R  | 3500                                    |
|        |                      | 390                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0E391R  | 3500                                    |
|        |                      | 470                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0E471R  | 3500                                    |
|        | 4                    | 150                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0G151R  | 3500                                    |
|        |                      | 180                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0G181R  | 3500                                    |
|        |                      |                          | 7.3            | 4.3 | 1.9 | 5600                                     | 12                          | EEFCX0G181XR | 3500                                    |
|        |                      | 220                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0G221R  | 3500                                    |
|        |                      |                          | 7.3            | 4.3 | 1.9 | 5600                                     | 12                          | EEFCX0G221XR | 3500                                    |
|        |                      | 270                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0G271R  | 3500                                    |
|        |                      | 330                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0G331R  | 3500                                    |
|        |                      | 100                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0J101R  | 3500                                    |
|        | 6.3                  | 120                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0J121R  | 3500                                    |
|        |                      | 150                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0J151R  | 3500                                    |
|        |                      |                          | 7.3            | 4.3 | 1.9 | 5600                                     | 12                          | EEFCX0J151XR | 3500                                    |
|        |                      | 180                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0J181R  | 3500                                    |
|        |                      | 220                      | 7.3            | 4.3 | 1.9 | 5100                                     | 15                          | EEFCX0J221R  | 3500                                    |
|        | 10                   | 47                       | 7.3            | 4.3 | 1.9 | 3200                                     | 40                          | EEFCX1A470R  | 3500                                    |
|        |                      | 68                       | 7.3            | 4.3 | 1.9 | 3200                                     | 40                          | EEFCX1A680R  | 3500                                    |
|        |                      | 100                      | 7.3            | 4.3 | 1.9 | 3200                                     | 40                          | EEFCX1A101R  | 3500                                    |
|        | 16                   | 15                       | 7.3            | 4.3 | 1.9 | 3200                                     | 40                          | EEFCX1C150R  | 3500                                    |
|        |                      | 22                       | 7.3            | 4.3 | 1.9 | 3200                                     | 40                          | EEFCX1C220R  | 3500                                    |
|        |                      | 33                       | 7.3            | 4.3 | 1.9 | 3200                                     | 40                          | EEFCX1C330R  | 3500                                    |
|        |                      | 47                       | 7.3            | 4.3 | 1.9 | 3200                                     | 40                          | EEFCX1C470R  | 3500                                    |
|        |                      | 68                       | 7.3            | 4.3 | 1.9 | 3200                                     | 40                          | EEFCX1C680R  | 3500                                    |
|        | 20                   | 22                       | 7.3            | 4.3 | 1.9 | 3200                                     | 40                          | EEFCX1D220R  | 3500                                    |
|        |                      | 33                       | 7.3            | 4.3 | 1.9 | 3200                                     | 40                          | EEFCX1D330R  | 3500                                    |
|        |                      | 47                       | 7.3            | 4.3 | 1.9 | 3200                                     | 40                          | EEFCX1D470R  | 3500                                    |
|        |                      | 56                       | 7.3            | 4.3 | 1.9 | 3200                                     | 40                          | EEFCX1D560R  | 3500                                    |
|        | 25                   | 15                       | 7.3            | 4.3 | 1.9 | 3200                                     | 40                          | EEFCX1E150R  | 3500                                    |
|        |                      | 22                       | 7.3            | 4.3 | 1.9 | 3200                                     | 40                          | EEFCX1E220R  | 3500                                    |
|        |                      | 33                       | 7.3            | 4.3 | 1.9 | 3200                                     | 40                          | EEFCX1E330R  | 3500                                    |
|        | 35                   | 15                       | 7.3            | 4.3 | 1.9 | 3200                                     | 40                          | EEFCX1V150R  | 3500                                    |
|        |                      | 22                       | 7.3            | 4.3 | 1.9 | 3200                                     | 40                          | EEFCX1V220R  | 3500                                    |

<sup>\*1</sup>: Ripple current (100 kHz/ +45°C ), <sup>\*2</sup>: ESR (100 kHz/+20 °C)

<sup>\*3</sup>: Please refer to the page of "Mounting Specifications".

<sup>\*4</sup>: Please contact us when 500 pcs packing is necessary.

## Temperature compensation multipliers for ripple current

|                    | Temp.       | T ≤ 45 °C | 45 °C < T ≤ 85 °C | 85 °C < T ≤ 105 °C |
|--------------------|-------------|-----------|-------------------|--------------------|
| 2 V.DC to 6.3 V.DC | Coefficient | 1.0       | 0.7               | 0.25               |
| 10 V.DC to 35 V.DC |             | 1.0       | 0.8               | 0.5                |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Panasonic:

[EEF-CX0D221R](#) [EEF-CX0D331R](#) [EEF-CX0E221R](#) [EEF-CX0G151R](#) [EEF-CX0J101R](#) [EEF-CX0D391R](#) [EEF-CX0D471R](#) [EEF-CX0E331R](#) [EEF-CX0E391R](#) [EEF-CX0G221R](#) [EEF-CX0J121R](#) [EEF-CX0D331XR](#) [EEF-CX0E471R](#) [EEF-CX0J181R](#) [EEF-CX0G181R](#) [EEF-CX0G181XR](#) [EEF-CX0G221XR](#) [EEF-CX0J151R](#) [EEF-CX0J151XR](#) [EEF-CX0D271XR](#) [EEF-CX1A680R](#) [EEF-CT1E220R](#) [EEF-CS1E150R](#) [EEF-CX1C150R](#) [EEF-CX1A101R](#) [EEF-CX1C330R](#) [EEF-CT1C470R](#) [EEF-CT1A680R](#) [EEF-CX1E330R](#) [EEF-CS1E100R](#) [EEF-CX1E150R](#) [EEF-CX1E220R](#) [EEF-CX1A470R](#) [EEF-CX1C680R](#) [EEF-CX1C220R](#) [EEF-CX1C470R](#) [EEF-CT0G181R](#) [EEF-CT0J101R](#) [EEF-CX0G271R](#) [EEF-CX0D561R](#) [EEF-CX1V220R](#) [EEF-CS1V100R](#) [EEF-CT1V150R](#) [EEF-CX1V150R](#) [EEF-CX1D560R](#) [EEF-CX1D330R](#) [EEF-CX0J221R](#) [EEF-CT1D470R](#) [EEF-CS1D220R](#) [EEF-CX0G331R](#) [EEF-CT1D330R](#) [EEF-CX1D220R](#) [EEF-CX1D470R](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)