



# T1035H, T1050H

## High temperature 10 A Snubberless™ Triacs

### Features

- Medium current Triac
- 150 °C max.  $T_j$  turn-off commutation
- Low thermal resistance with clip bonding
- Very high 3 quadrant commutation capability
- Packages are RoHS (2002/95/EC) compliant
- UL certified (ref. file E81734)

### Applications

Especially designed to operate in high power density or universal motor applications such as vacuum cleaner and washing machine drum motor, these 10 A Triacs provide a very high switching capability up to junction temperatures of 150 °C.

The heatsink can be reduced, compared to traditional Triacs, according to the high performance at given junction temperatures.

### Description

Available in through-hole or surface mount packages, the T1035H and T1050H Triacs series are suitable for general purpose mains power ac switching.

By using an internal ceramic pad, the T10xxH-6I provides voltage insulation (rated at 2500 V rms).

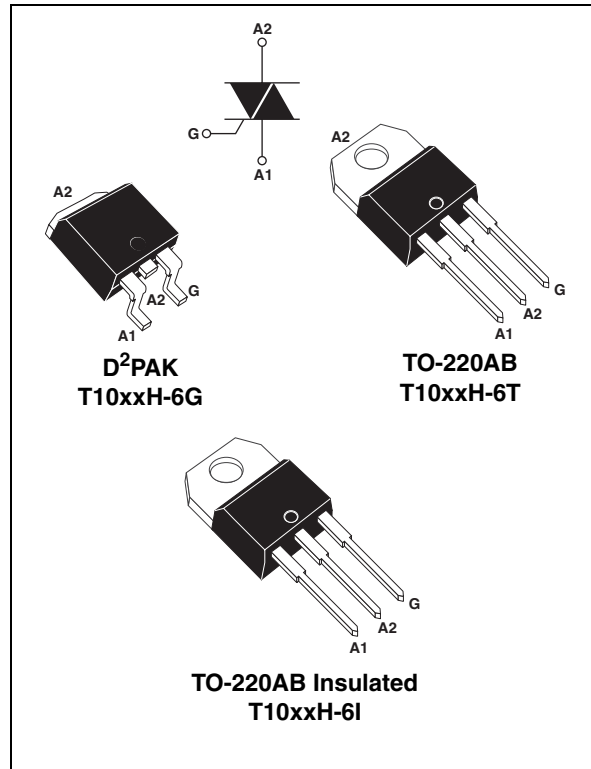


Table 1. Device summary

| Symbol            | Value    | Unit |
|-------------------|----------|------|
| $I_{T(RMS)}$      | 10       | A    |
| $V_{DRM}/V_{RRM}$ | 600      | V    |
| $I_{GT}$          | 35 or 50 | mA   |

**TM:** Snubberless is a trademark of STMicroelectronics

# 1 Characteristics

**Table 2. Absolute maximum ratings**

| Symbol             | Parameter                                                                                              |                               |                                     | Value                          | Unit               |
|--------------------|--------------------------------------------------------------------------------------------------------|-------------------------------|-------------------------------------|--------------------------------|--------------------|
| $I_{T(RMS)}$       | On-state rms current (full sine wave)                                                                  | D <sup>2</sup> PAK, TO-220AB  | $T_c = 135\text{ }^{\circ}\text{C}$ | 10                             | A                  |
|                    |                                                                                                        | TO-220AB Ins                  | $T_c = 125\text{ }^{\circ}\text{C}$ |                                |                    |
| $I_{TSM}$          | Non repetitive surge peak on-state current (full cycle, $T_j$ initial = $25\text{ }^{\circ}\text{C}$ ) | F = 50 Hz                     | t = 20 ms                           | 100                            | A                  |
|                    |                                                                                                        | F = 60 Hz                     | t = 16.7 ms                         | 105                            |                    |
| $I^2t$             | $I^2t$ Value for fusing                                                                                | $t_p = 10\text{ ms}$          |                                     | 66                             | A <sup>2</sup> s   |
| di/dt              | Critical rate of rise of on-state current $I_G$<br>= $2 \times I_{GT}$ , $t_r \leq 100\text{ ns}$      | F = 120 Hz                    | $T_j = 150\text{ }^{\circ}\text{C}$ | 50                             | A/ $\mu$ s         |
| $V_{DSM}/V_{RSM}$  | Non repetitive surge peak off-state voltage                                                            | $t_p = 10\text{ ms}$          | $T_j = 25\text{ }^{\circ}\text{C}$  | $V_{DRM}/V_{RRM} + 100$        | V                  |
| $I_{GM}$           | Peak gate current                                                                                      | $t_p = 20\text{ }\mu\text{s}$ | $T_j = 150\text{ }^{\circ}\text{C}$ | 4                              | A                  |
| $P_{G(AV)}$        | Average gate power dissipation                                                                         |                               | $T_j = 150\text{ }^{\circ}\text{C}$ | 1                              | W                  |
| $T_{stg}$<br>$T_j$ | Storage junction temperature range<br>Operating junction temperature range                             |                               |                                     | - 40 to + 150<br>- 40 to + 150 | $^{\circ}\text{C}$ |

**Table 3. Electrical characteristics ( $T_j = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified)**

| Symbol                              | Test Conditions                                                              | Quadrant     |      | Value  |        | Unit       |
|-------------------------------------|------------------------------------------------------------------------------|--------------|------|--------|--------|------------|
|                                     |                                                                              |              |      | T1035H | T1050H |            |
| $I_{GT}^{(1)}$                      | $V_D = 12\text{ V}$ , $R_L = 33\text{ }\Omega$                               | I - II - III | MAX. | 35     | 50     | mA         |
| $V_{GT}$                            |                                                                              | I - II - III | MAX. | 1.0    |        | V          |
| $V_{GD}$                            | $V_D = V_{DRM}$ , $R_L = 3.3\text{ k}\Omega$                                 | I - II - III | MIN. | 0.15   |        | V          |
| $I_H^{(2)}$                         | $I_T = 500\text{ mA}$                                                        |              | MAX. | 35     | 75     | mA         |
| $I_L$                               | $I_G = 1.2\text{ }I_{GT}$                                                    | I - III      | MAX. | 50     | 90     | mA         |
|                                     |                                                                              | II           |      | 80     | 110    |            |
| dV/dt <sup>(2)</sup>                | $V_D = 67\%\text{ }V_{DRM}$ , gate open, $T_j = 150\text{ }^{\circ}\text{C}$ |              | MIN. | 1000   | 1500   | V/ $\mu$ s |
| (di/dt) <sub>c</sub> <sup>(2)</sup> | Without snubber, $T_j = 150\text{ }^{\circ}\text{C}$                         |              | MIN. | 13     | 18     | A/ms       |

1. minimum  $I_{GT}$  is guaranteed at 20% of  $I_{GT}$  max.

2. for both polarities of A2 referenced to A1.

**Table 4. Static characteristics**

| Symbol                       | Test Conditions                                         |                                   |      | Value | Unit          |
|------------------------------|---------------------------------------------------------|-----------------------------------|------|-------|---------------|
| $V_T^{(1)}$                  | $I_{TM} = 14\text{ A}$ , $t_p = 380\text{ }\mu\text{s}$ | $T_j = 25\text{ }^\circ\text{C}$  | MAX. | 1.5   | V             |
| $V_{t0}^{(1)}$               | Threshold voltage                                       | $T_j = 150\text{ }^\circ\text{C}$ | MAX. | 0.80  | V             |
| $R_d^{(1)}$                  | Dynamic resistance                                      | $T_j = 150\text{ }^\circ\text{C}$ | MAX. | 34    | m $\Omega$    |
| $I_{DRM}$<br>$I_{RRM}^{(2)}$ | $V_{DRM} = V_{RRM}$                                     | $T_j = 25\text{ }^\circ\text{C}$  | MAX. | 5     | $\mu\text{A}$ |
|                              |                                                         | $T_j = 150\text{ }^\circ\text{C}$ | MAX. | 3.6   | mA            |
|                              | $V_D/V_R = 400\text{ V}$ (at peak mains voltage)        | $T_j = 150\text{ }^\circ\text{C}$ | MAX. | 3.0   |               |
|                              | $V_D/V_R = 200\text{ V}$ (at peak mains voltage)        | $T_j = 150\text{ }^\circ\text{C}$ | MAX. | 2.5   |               |

1. for both polarities of A2 referenced to A1.

2.  $t_p = 380\text{ }\mu\text{s}$

**Table 5. Thermal resistance**

| Symbol        | Parameter             |                                        | Value | Unit               |
|---------------|-----------------------|----------------------------------------|-------|--------------------|
| $R_{th(j-c)}$ | Junction to case (AC) | D <sup>2</sup> PAK / TO-220AB          | 1.45  | $^\circ\text{C/W}$ |
|               |                       | TO-220AB Ins                           | 3.4   |                    |
| $R_{th(j-a)}$ | Junction to ambient   | $S = 1\text{ cm}^2$ D <sup>2</sup> PAK | 45    |                    |
|               |                       | TO-220AB / TO-220AB Ins                | 60    |                    |

Figure 1. Maximum power dissipation versus on-state rms current (full cycle)

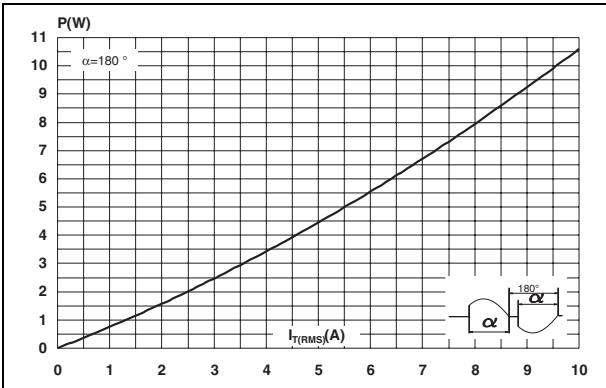


Figure 2. On-state rms current versus case temperature (full cycle)

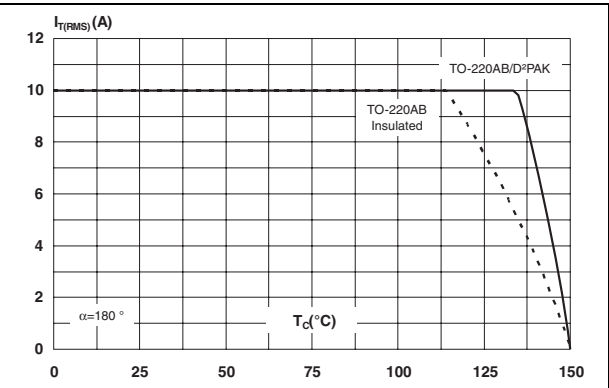


Figure 3. On-state rms current versus ambient temperature

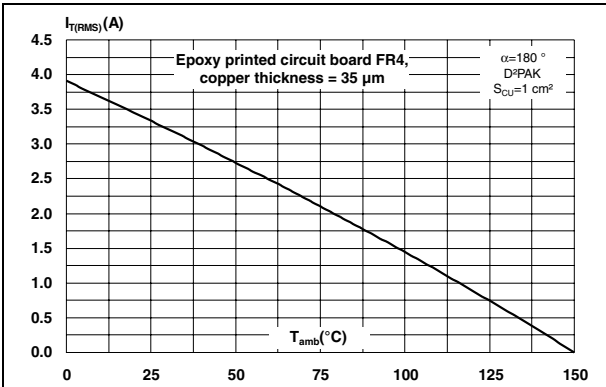


Figure 4. Variation of thermal impedance versus pulse duration

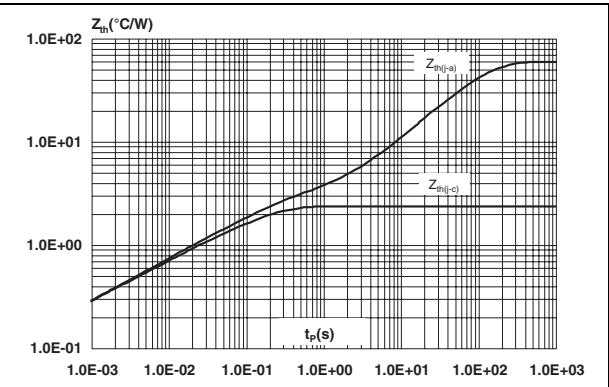


Figure 5. On-state characteristics (maximum values)

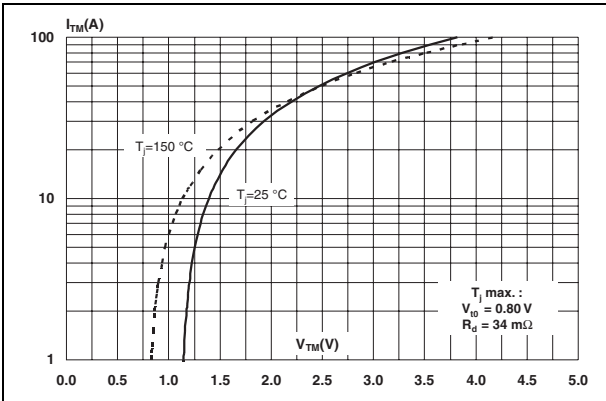


Figure 6. Surge peak on-state current versus number of cycles

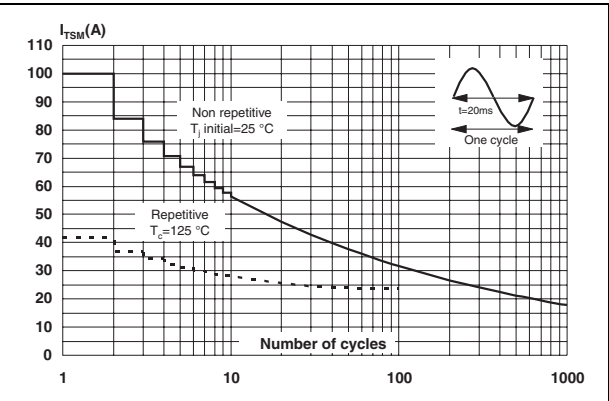


Figure 7. Non-repetitive surge peak on-state current for a sinusoidal pulse with

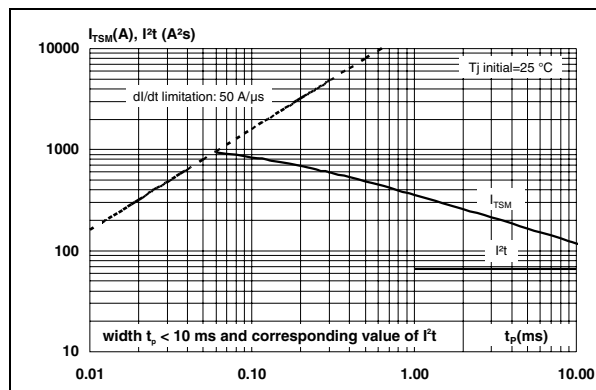


Figure 8. Relative variation of  $I_{GT}, I_H, I_L$  vs junction temperature (typical values)

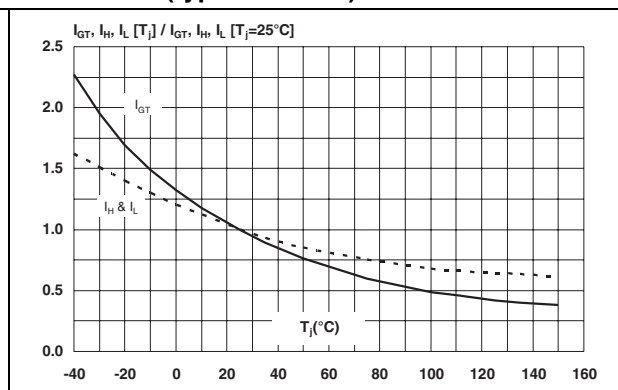


Figure 9. Relative variation of critical rate of decrease of main current  $(dI/dt)_c$  versus reappplied  $(dV/dt)_c$

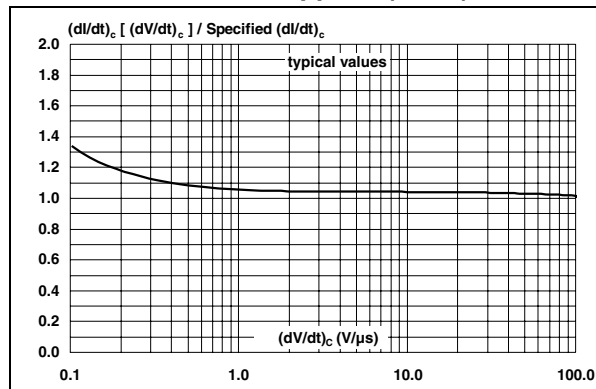


Figure 10. Relative variation of critical rate of decrease of main current versus junction temperature

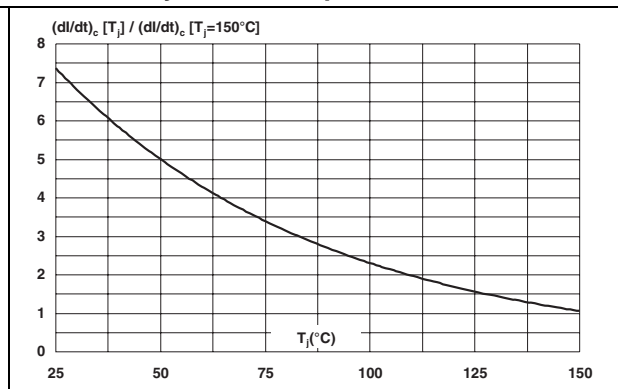


Figure 11. Leakage current versus junction temperature for different values of blocking voltage (typical values)



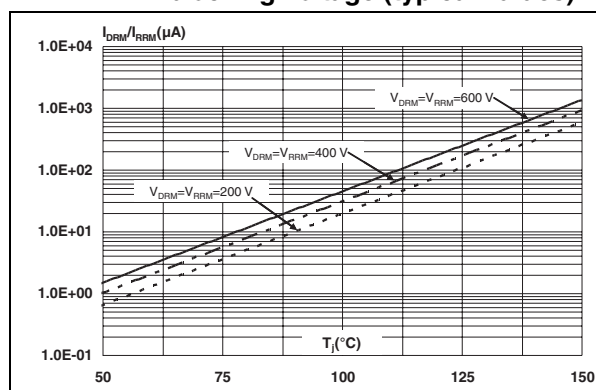


Figure 12. Variation of thermal resistance junction to ambient versus copper surface under tab

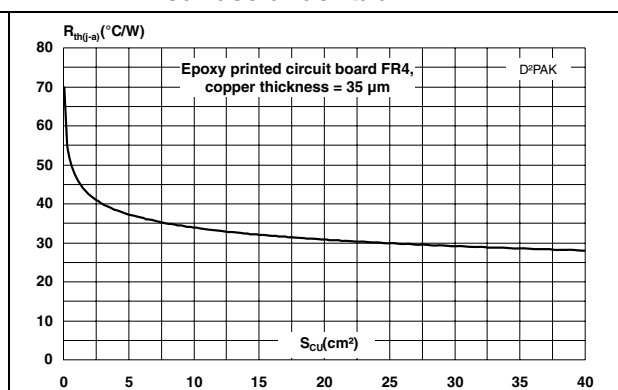

## 2 Ordering information scheme

Figure 13. Ordering information scheme

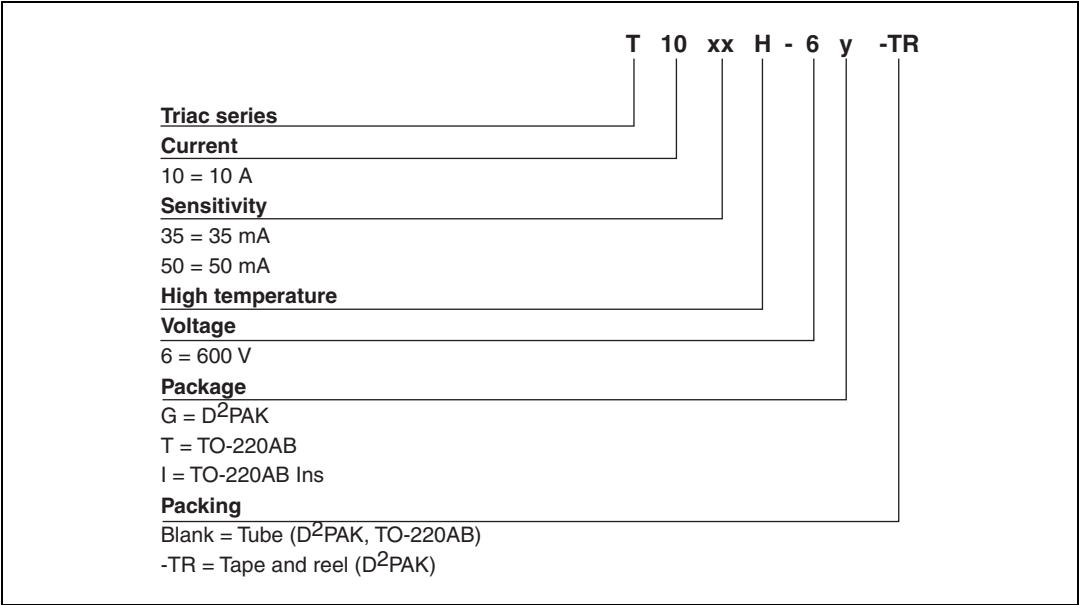

### 3 Package information

- Epoxy meets UL94, V0
- Recommended torque 0.4 to 0.6 N-m

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

Table 6. D<sup>2</sup>PAK dimensions

| Ref. | Dimensions  |      |       |        |       |       |
|------|-------------|------|-------|--------|-------|-------|
|      | Millimeters |      |       | Inches |       |       |
|      | Min.        | Typ. | Max.  | Min.   | Typ.  | Max.  |
| A    | 4.30        |      | 4.60  | 0.169  |       | 0.181 |
| A1   | 2.49        |      | 2.69  | 0.098  |       | 0.106 |
| A2   | 0.03        |      | 0.23  | 0.001  |       | 0.009 |
| B    | 0.70        |      | 0.93  | 0.027  |       | 0.037 |
| B2   | 1.25        | 1.40 |       | 0.048  | 0.055 |       |
| C    | 0.45        |      | 0.60  | 0.017  |       | 0.024 |
| C2   | 1.21        |      | 1.36  | 0.047  |       | 0.054 |
| D    | 8.95        |      | 9.35  | 0.352  |       | 0.368 |
| E    | 10.00       |      | 10.28 | 0.393  |       | 0.405 |
| G    | 4.88        |      | 5.28  | 0.192  |       | 0.208 |
| L    | 15.00       |      | 15.85 | 0.590  |       | 0.624 |
| L2   | 1.27        |      | 1.40  | 0.050  |       | 0.055 |
| L3   | 1.40        |      | 1.75  | 0.055  |       | 0.069 |
| R    | 0.40        |      |       | 0.016  |       |       |
| V2   | 0°          |      | 8°    | 0°     |       | 8°    |

Figure 14. Footprint (dimensions in mm)


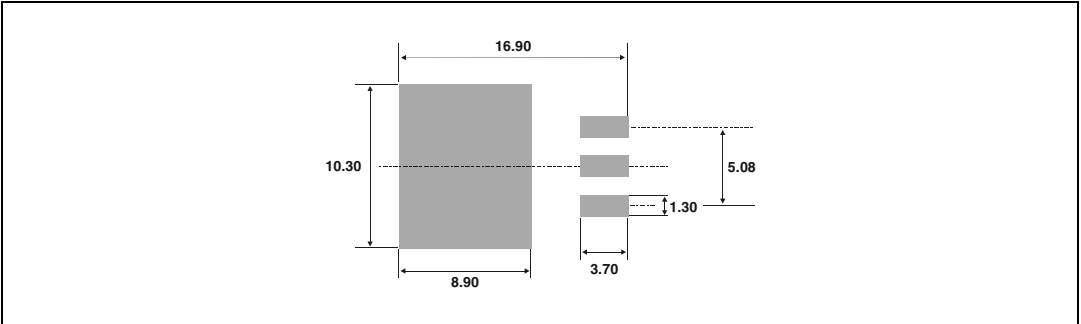


Table 7. TO-220AB and TO-220AB Ins dimensions

| Ref. | Dimensions  |       |       |        |       |       |
|------|-------------|-------|-------|--------|-------|-------|
|      | Millimeters |       |       | Inches |       |       |
|      | Min.        | Typ.  | Max.  | Min.   | Typ.  | Max.  |
| A    | 15.20       |       | 15.90 | 0.598  |       | 0.625 |
| a1   |             | 3.75  |       |        | 0.147 |       |
| a2   | 13.00       |       | 14.00 | 0.511  |       | 0.551 |
| B    | 10.00       |       | 10.40 | 0.393  |       | 0.409 |
| b1   | 0.61        |       | 0.88  | 0.024  |       | 0.034 |
| b2   | 1.23        |       | 1.32  | 0.048  |       | 0.051 |
| C    | 4.40        |       | 4.60  | 0.173  |       | 0.181 |
| c1   | 0.49        |       | 0.70  | 0.019  |       | 0.027 |
| c2   | 2.40        |       | 2.72  | 0.094  |       | 0.107 |
| e    | 2.40        |       | 2.70  | 0.094  |       | 0.106 |
| F    | 6.20        |       | 6.60  | 0.244  |       | 0.259 |
| ØI   | 3.75        |       | 3.85  | 0.147  |       | 0.151 |
| l4   | 15.80       | 16.40 | 16.80 | 0.622  | 0.646 | 0.661 |
| L    | 2.65        |       | 2.95  | 0.104  |       | 0.116 |
| l2   | 1.14        |       | 1.70  | 0.044  |       | 0.066 |
| l3   | 1.14        |       | 1.70  | 0.044  |       | 0.066 |
| M    |             | 2.60  |       |        | 0.102 |       |

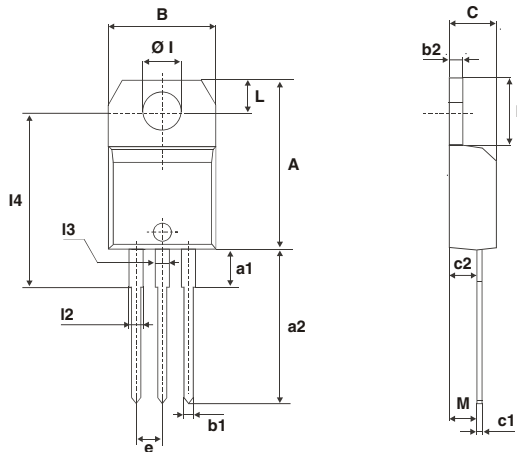

## 4 Ordering information

**Table 8. Ordering information**

| Order code   | Marking   | Package            | Weight | Base qty | Delivery mode |
|--------------|-----------|--------------------|--------|----------|---------------|
| T10xxH-6G    | T10xxH 6G | D <sup>2</sup> PAK | 1.5 g  | 50       | Tube          |
| T10xxH-6G-TR | T10xxH 6G | D <sup>2</sup> PAK | 1.5 g  | 1000     | Tape and reel |
| T10xxH-6T    | T10xxH 6T | TO-220AB           | 2.3 g  | 50       | Tube          |
| T10xxH-6I    | T10xxH 6I | TO-220AB Ins       | 2.3 g  | 50       | Tube          |

## 5 Revision history

**Table 9. Document revision history**

| Date        | Revision | Changes                                                                                        |
|-------------|----------|------------------------------------------------------------------------------------------------|
| 17-Apr-2007 | 1        | First issue                                                                                    |
| 20-Sep-2011 | 2        | Updated: <a href="#">Features</a> , <a href="#">Description</a> and <a href="#">Figure 2</a> . |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2011 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)