



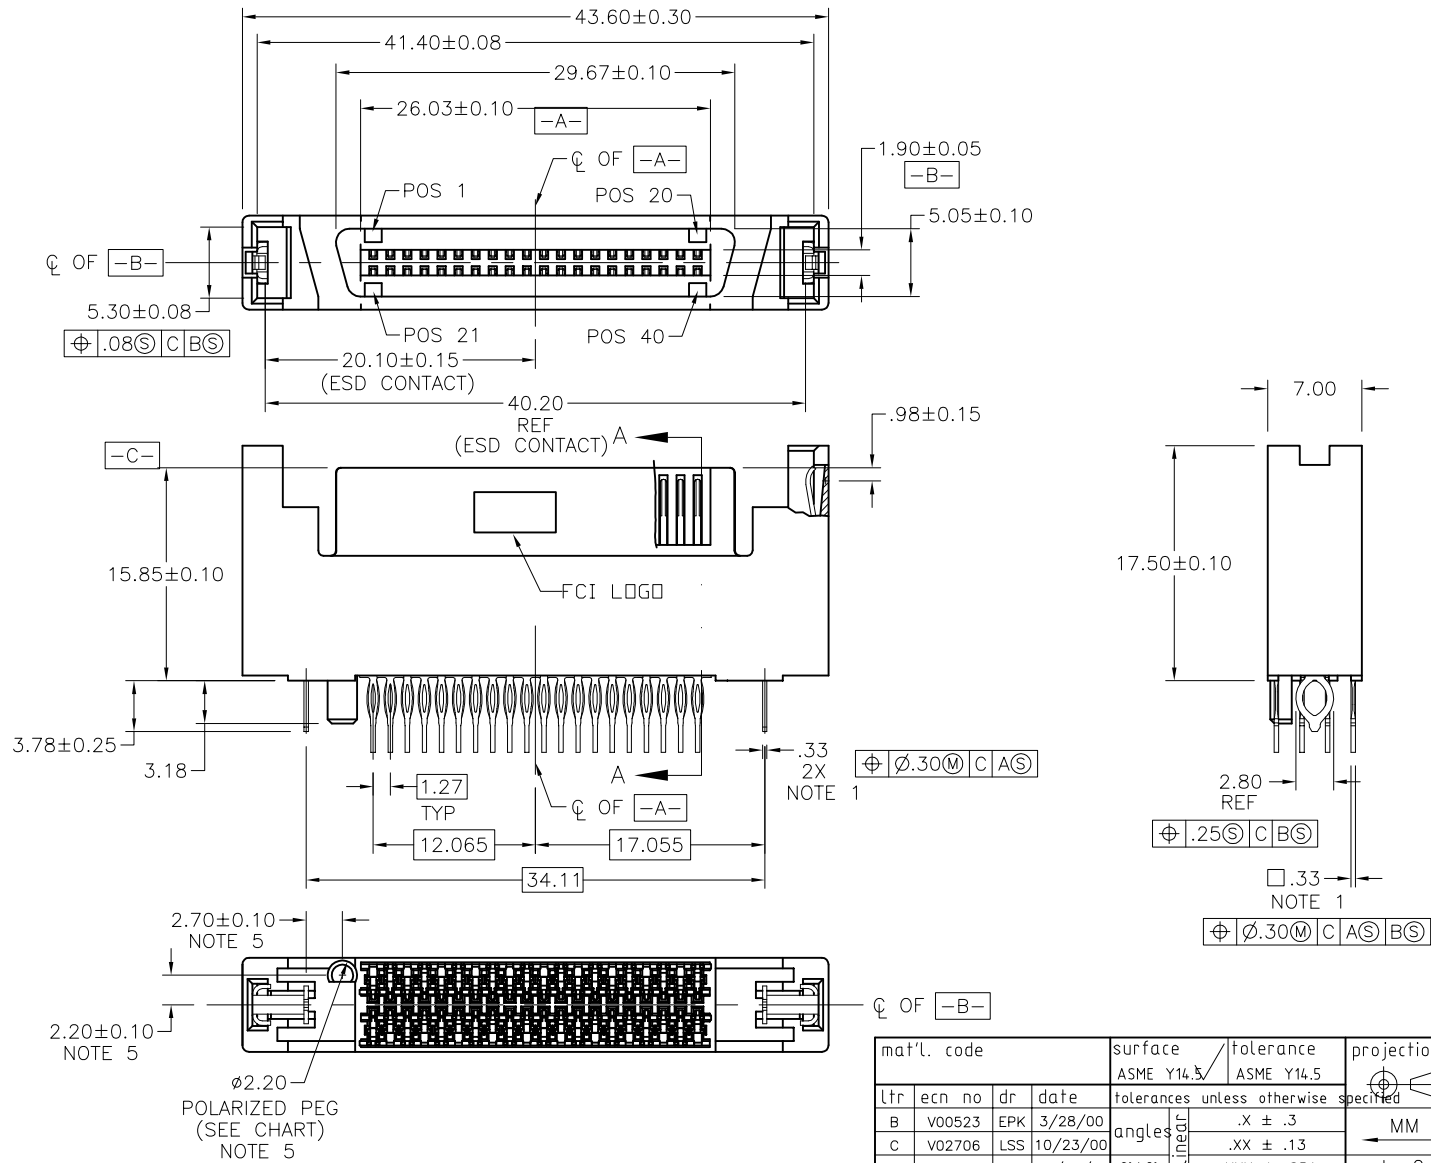

mat'l. code	surface	tolerance	projection	product family
	ASME Y14.5	ASME Y14.5		SCA-2
ltr	ecn no	dr	date	title
B	V00523	EPK	3/28/00	SCA-2 & FIBER CHANNEL
C	V02706	LSS	10/23/00	40 POS. RECEPT. ASS'Y EXT. HT.
D	V10902	LSS	02/21/01	dwg no
E	V11185	JWS	04/12/01	sheet 1 of 4
F	S04-0090	GLL	04/30/04	size
G	S04-0250	GLL	11/22/04	72443
H	pg07-0224	JW	05/25/07	A4
sheet	revision	H	H	H
index	sheet	1	2	3

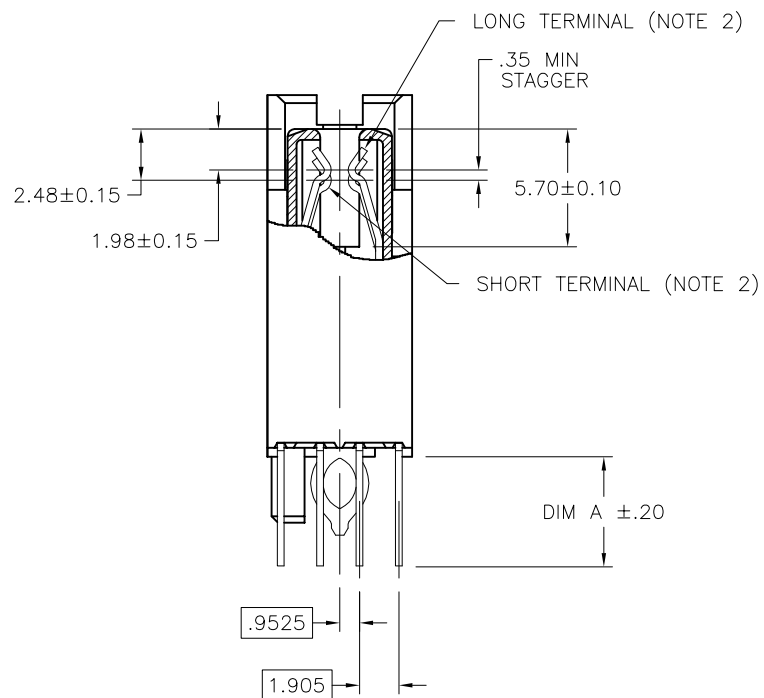


SECTION A-A

mat'l. code				surface ASME Y14.5	tolerance ASME Y14.5	projection 	product family SCA-2		
ltr	ecn no	dr	date	tolerances unless otherwise specified			title		
H				angles	.X±.3	 MM	SCA-2 & FIBER CHANNEL 40 POS. RECEPT. ASS'Y EXT. HT.		
				linear	.XX±.13				
				0°±2°	.XXX±.051	scale 3:1	dwg no sheet 2 of size		
				dr	D. INGRAM 9/28/96		72443 A4		
				engr	JULIA WANG 5/25/07		type Product Customer Drawing		
				chr	GARY HSIEH 5/25/07				
				appd	JOSEPH HSIA 5/25/07				
sheet index	revision sheet								

PRODUCT NO. SEE NOTE 7	DIM A	POLARIZATION PEG	PLATING	RECOMMENDED P.C. BOARD THICKNESS	PRODUCT NO. SEE NOTE 7	PLATING	PRODUCT NO. SEE NOTE 12	PLATING	PRODUCT NO. SEE NOTE 12	PLATING	
72443-001	3.79	YES	NOTE 4	2.36mm (0.093") AND 3.18mm (0.125")	72443-101	NOTE 6	72443-001LF	NOTE 9	72443-201LF	NOTE 8	
↑ -001S					↑ -101S		↑ 		↑ 		
-002	↑ -102	↑ -002LF			↑ -202LF						
-002S	↑ -102S	↑ 			↑ 						
-003	↑ -103	↑ -003LF			↑ -203LF						
-003S	↑ -103S	↑ 			↑ 						
-004	↑ -104	↑ -004LF			↑ -204LF						
72443-004S					72443-104S						

NOTES :



- ① TRUE POSITION NOTES APPLY AT TERMINAL TIP.
- ② CONTACTS IN POSITIONS 1 THRU 20, 24, 25, 27, 28, 30, 31, 33, AND 34 ARE SHORT TERMINALS. CONTACTS IN POSITIONS 21, 22, 23, 26, 29, 32, AND 35 THRU 40 ARE LONG TERMINALS.
- ③ RAW MATERIALS:
HOUSING: HTN, UL94V-0, COLOR: BLACK
CONTACTS: PHOSPHOR-BRONZE
- ④ CONTACT PLATING: 30u" (0.76um) MIN. GXT PLATING OVER 50u" (1.27um) NICKLE MIN. UNDERPLATE IN CONTACT AREA. 20u" (0.5um) MIN-60u" (1.5um) MAX TIN-LEAD PLATING OVER 50u" (1.27um) MIN NICKEL UNDERPLATE IN P.C. BOARD LEG AREA. 50u" (1.27um) MIN. NICKEL UNDERPLATE OVER REMAINING AREA.
- ⑤ DIMENSIONS DO NOT APPLY TO CONNECTOR STYLES WITHOUT POLARIZATION PEG. (SEE CHART)
- ⑥ CONTACT PLATING: 30u" (0.76um) MIN. GOLD PLATING OVER 50u" (1.27um) NICKLE MIN. UNDERPLATE IN CONTACT AREA. 20u" (0.5um) MIN-60u" (1.5um) MAX TIN-LEAD PLATING OVER 50u" (1.27um) MIN. NICKEL UNDERPLATE IN P.C. BOARD LEG AREA. 50u" (1.27um) MIN. NICKEL UNDERPLATE OVER REMAINING AREA.
- ⑦ PART NUMBERS WITH AN "S" SUFFIX ARE MANUFACTURED WITH A BRIGHT TIN-LEAD FINISH ON THE TERMINAL TAIL SECTION. PART NUMBERS WITHOUT AN END SUFFIX ARE MANUFACTURED WITH MATTE TIN-LEAD FINISH OR MATTE TIN FINISH.
- ⑧ CONTACT PLATING: 30u" (0.76um) GOLD PLATING OVER 50u" (1.27um) NICKLE UNDERPLATE IN CONTACT AREA. 20u" (0.5um) - 60u" (1.5um) TIN PLATING OVER 50u" (1.27um) - 100u" (2.54um) NICKEL UNDERPLATE IN P.C. BOARD LEG AREA. 50u" (1.27um) NICKEL UNDERPLATE OVER REMAINING AREA.
- ⑨ CONTACT PLATING: 30u" (0.76um) GXT PLATING OVER 50u" (1.27um) NICKLE UNDERPLATE IN CONTACT AREA. 20u" (0.5um) - 60u" (1.5um) TIN PLATING OVER 50u" (1.27um) - 100u" (2.54um) NICKEL UNDERPLATE IN P.C. BOARD LEG AREA. 50u" (1.27um) NICKEL UNDERPLATE OVER REMAINING AREA.
- ⑩ THE HOUSING WILL WITHSTAND EXPOSURE TO 260° C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA RED VAPOR PHASE REFLOW OVEN.

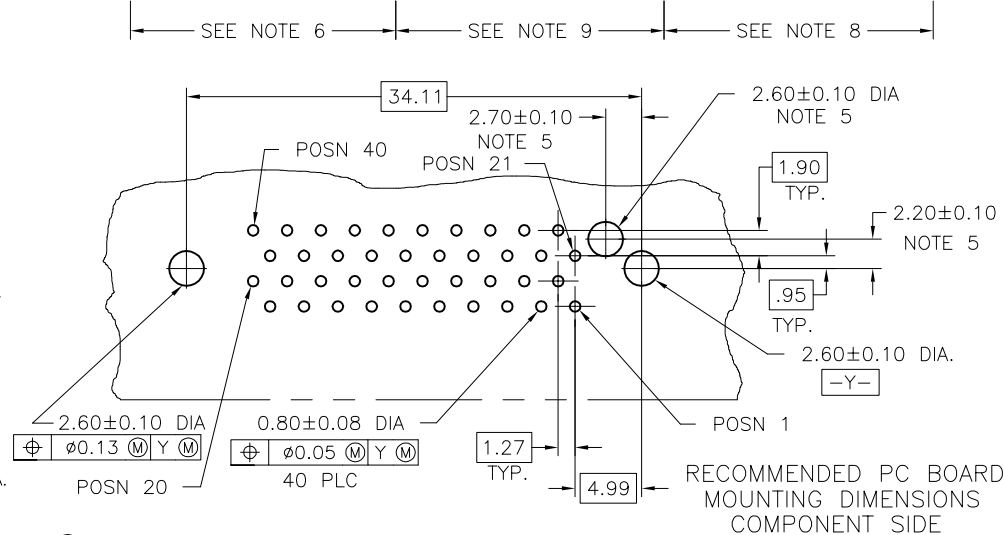

- ⑪ THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 12 PART NUMBERS ENDING IN "LF" MEANS FOR NOTE 11 LEAD FREE IDENTIFICATION. P/N XXXXX-2XXLF IS EQUIVALENT TO PREVIOUS P/N XXXXX-2XX

mat'l. code				surface	tolerance	projection	product family
				ASME Y14.5	ASME Y14.5		SCA-2
ltr	ecn no	dr	date	tolerances unless otherwise specified			title
H				angles	.X±.3	MM	SCA-2 & FIBER CHANNEL
				linear	.XX±.13		40 POS. RECEPT. ASS'Y EXT. HT.
				0°±2'	.XXX±.051	scale 2:1	dwg no
				dr	D. INGRAM	9/28/96	sheet 3 of 4
				engr	JULIA WANG	5/25/07	size
				chr	GARY HSIEH	5/25/07	72443
				appd	JOSEPH HSIA	5/25/07	A4
sheet	revision						type
index	sheet						Product Customer Drawing

SEE NOTE 12	DIM A	PEG	PLATING	BOARD THICKNESS	REMARK
72443-205LF	3.79	YES	NOTE 8	2.36mm (0.093")	NOTE ⑭
-206LF	3.79	NO		AND 3.18mm (0.125")	

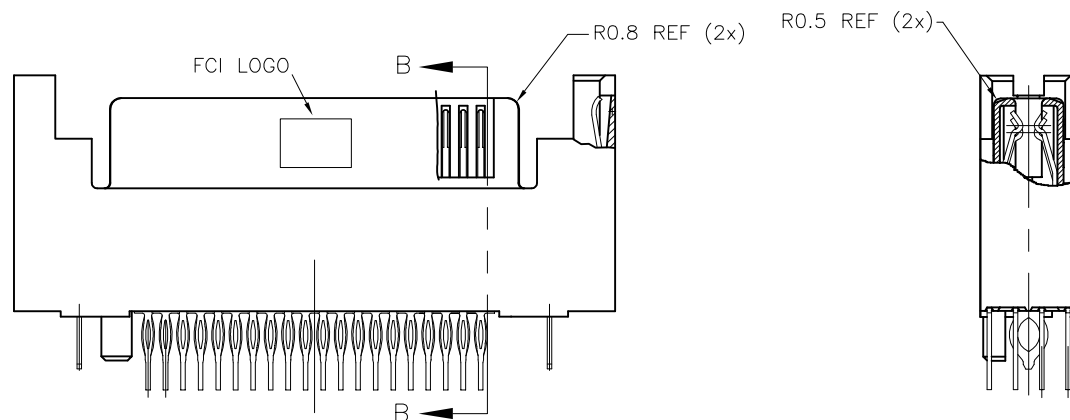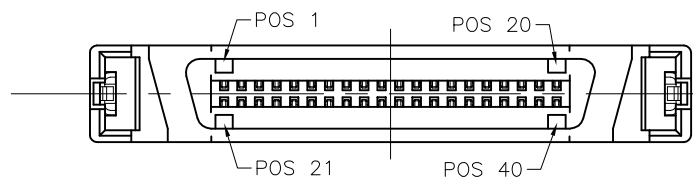

ALL OTHER DIMENSIONS, REFER TO 72443-201LF (SHEET 1 - 3)

SECTION B-B

NOTES :

⑭ WITH CUSTOMISED RADIUS ADDED

mat'l. code				surface	tolerance	projection	product family
				ASME Y14.5	ASME Y14.5		SCA-2
ltr	ecn no	dr	date	tolerances unless otherwise specified			title
H				angles	.X±.3	MM	SCA-2 & FIBER CHANNEL
				linear	.XX±.13		40 POS. RECEPT. ASS'Y EXT. HT.
				0°±2°	.XXX±.051	scale 2:1	dwg no
				dr	D. INGRAM	9/28/96	sheet 4 of 4
				engr	JULIA WANG	5/25/07	size
				chr	GARY HSIEH	5/25/07	A4
				appd	JOSEPH HSIA	5/25/07	type
sheet	revision						Product Customer Drawing
index	sheet						

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru