


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


NOTES:

1. SEE SHEETS 2, 3 & 4 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITIES.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

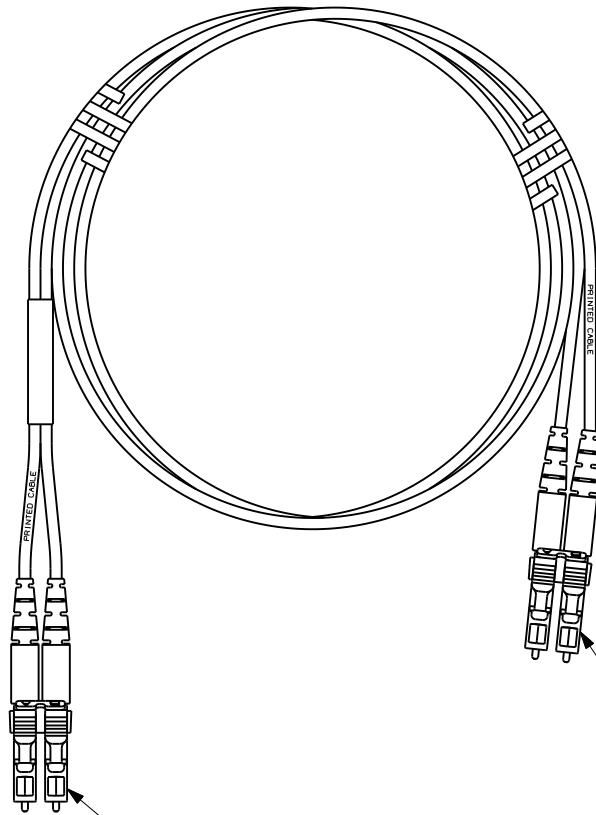

DUPLEXED LC CONNECTORS
(PRINTED CABLE SIDE B)

DUPLEXED LC CONNECTORS
(PRINTED CABLE SIDE A)



| | | | | | | | | | | | | | |
|-----|----------|-----|-----|------------------------|----------|---|------|-----|-----|---|--|-------------------------------------|--|
| | | | | | | | | | | FIBER OPTIC PATCH CORD DUPLEX LC TO LC CONFIGURATION CUSTOMER DRAWING | | | |
| | | | | | | | | | |  PANDUIT ™ CORP. TINLEY PARK, ILL 60477 | | | |
| | | | | | | | | | | ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. | | DRAWING FILENAME M02779BC_DC/01A | |
| | | | | | | | | | | DIMENSIONAL TOLERANCES ARE: (.X) ±.010 (0.3) (.XX) ±.03 (0.8) ANGLES | | SCALE NONE | |
| | | | | | | | | | | THIRD ANGLE PROJECTION | | PART NO. SEE SHEETS 2, 3 & 4 | |
| | | | | | | | | | | DRAWN BY MC | | REVIEW DRAWING NUMBERS | |
| | | | | | | | | | | DATE 04-27-07 | | DRAWING NO. 02779-11 | |
| | | | | | | | | | | CHK'D RAF | | SIZE A | |
| 01 | 09-09-09 | EFK | | RELEASED TO PRODUCTION | 02779-11 | | | | | | | | |
| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SUP | OTH | | | | |

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| DUPLEX LC TO LC FIBER OPTIC PATCH CORD | | | | | | | |
|--|-----------------|---------------------|----------------------------|--------|--------------|---------|----------------|
| PANDUIT PART NO. | CABLE | | | | LC CONNECTOR | | |
| | RATING | FIBER TYPE | COUNT | COLOR | MAX. IL | MIN. RL | BOOT COLOR |
| F5E10-10M*Y | RISER (OFNR) | 50/125um | DUPLEX 1.6mm ZIPCORD | ORANGE | 0.25dB | 20dB | BLACK |
| F6E10-10M*Y | | 62.5/125um | | | | | ELECTRIC IVORY |
| FXE10-10M*Y | | 10GbE OM3 | | AQUA | 0.25dB | 26dB | AQUA |
| FXOE10-10M* | | OPTIMIZED 10GbE OM3 | | | 0.15dB | 26dB | |
| FZE10-10M* | | 10GbE OM4 | | AQUA | 0.25dB | 26dB | AQUA |
| FZOE10-10M* | | OPTIMIZED 10GbE OM4 | | | 0.15dB | 26dB | |
| F9E10-10M*Y | | 9/125um OS1 | | YELLOW | 0.35dB | 55dB | BLUE |

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SUP | OTH |
|-----|----------|-----|-----|------------------------|----------|---|------|-----|-----|
| 01 | 09-09-09 | EFK | | RELEASED TO PRODUCTION | 02779-11 | | | | |

| | | | |
|--|--|--|--|
|  | | PANDUIT TM CORP. TINLEY PARK, ILL 60477 | |
|  THIRD ANGLE PROJECTION | | ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.010 (.3) ±.008 ANGLES | |
| DRAWN BY: MC | | REVIEW DRAWING NUMBERS: | |
| DATE: 04-27-07 | | DRAWING FILENAME: M02779BC_DC/01A | |
| CHK'D: RAF | | SCALE: NONE | |
| | | PART NO. SEE SHEETS 2, 3 & 4 | |
| | | DRAWING NO. 02779-11 | |
| | | SHEET 2 OF 4 | |
| | | SIZE A | |

| DUPLEX LC TO LC FIBER OPTIC PATCH CORD | | | | | | | |
|--|---------------|---------------------|----------------------|--------|--------------|---------|----------------|
| PANDUIT PART NO. | CABLE | | | | LC CONNECTOR | | |
| | RATING | FIBER TYPE | COUNT | COLOR | MAX. IL | MIN. RL | BOOT COLOR |
| F5PE10-10M* | PLENUM (OFNP) | 50/125um OM2 | DUPLEX 1.6mm ZIPCORD | ORANGE | 0.25dB | 20dB | BLACK |
| F6PE10-10M* | | 62.5/125um OM1 | | | | | ELECTRIC IVORY |
| FXPE10-10M* | | 10GbE OM3 | | AQUA | 0.25dB | 26dB | AQUA |
| FXOPE10-10M* | | OPTIMIZED 10GbE OM3 | | | 0.15dB | 26dB | |
| FZPE10-10M* | | 10GbE OM4 | | AQUA | 0.25dB | 26dB | AQUA |
| FZOPE10-10M* | | OPTIMIZED 10GbE OM4 | | | 0.15dB | 26dB | |
| F9PE10-10M* | | 9/125um OS1 | | YELLOW | 0.35dB | 55dB | BLUE |



* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

| | | | | | | | | | | | | |
|-----|----------|-----|-----|------------------------|----------|---|------|-----|--|------------------|------------------------|---|
| | | | | | | | | | FIBER OPTIC PATCH CORD DUPLEX LC TO LC CONFIGURATION CUSTOMER DRAWING | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | PANDUIT ™ CORP. TINLEY PARK, ILL 60477 | | | |
| | | | | | | | | | ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.010 (.3) ±.01 | | | |
| | | | | | | | | | DRAWING FILENAME M02779BC_DC/01A | | | |
| | | | | | | | | | SCALE NONE | | | |
| | | | | | | | | | PART NO. SEE SHEETS 2, 3 & 4 | | | |
| | | | | | | | | | DRAWING NO. 02779-11 | | | |
| | | | | | | | | | SIZE A | | | |
| 01 | 09-09-09 | EFK | | RELEASED TO PRODUCTION | 02779-11 | | | | | DRAWN BY MC | REVIEW DRAWING NUMBERS | PART NO. SEE SHEETS 2, 3 & 4 |
| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SUP | OTH | DATE 04-27-07 | CHK'D RAF | DRAWING NO. 02779-11 SHEET 3 OF 4 |

| DUPLEX LC TO LC FIBER OPTIC PATCH CORD | | | | | | | |
|--|-----------------------------------|---------------------|----------------------|--------|--------------|---------|----------------|
| PANDUIT PART NO. | CABLE | | | | LC CONNECTOR | | |
| | RATING | FIBER TYPE | COUNT | COLOR | MAX. IL | MIN. RL | BOOT COLOR |
| F5LE10-10M* | LOW SMOKE ZERO HALOGEN (LSZH) IEC | 50/125um OM2 | DUPLEX 1.6mm ZIPCORD | ORANGE | 0.25dB | 20dB | BLACK |
| F6LE10-10M* | | 62.5/125um OM1 | | | | | ELECTRIC IVORY |
| FXLE10-10M* | | 10GbE OM3 | | AQUA | 0.25dB | 26dB | AQUA |
| FXOLE10-10M* | | OPTIMIZED 10GbE OM3 | | | 0.15dB | 26dB | |
| FZLE10-10M* | | 10GbE OM4 | | AQUA | 0.25dB | 26dB | AQUA |
| FZOLE10-10M* | | OPTIMIZED 10GbE OM4 | | | 0.15dB | 26dB | |
| F9LE10-10M* | | 9/125um OS1 | | YELLOW | 0.35dB | 55dB | BLUE |

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SUP | OTH |
|-----|----------|-----|-----|------------------------|----------|---|------|-----|-----|
| 01 | 09-09-09 | EFK | | RELEASED TO PRODUCTION | 02779-11 | | | | |

| | | | |
|---|--|--|--|
|  | | PANDUIT TM CORP. TINLEY PARK, ILL 60477 | |
|  THIRD ANGLE PROJECTION | | ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.010 (0.3) ±.008 ANGLES | |
| DRAWN BY MC | | REVIEW DRAWING NUMBERS | |
| DATE 04-27-07 | | DRAWING FILENAME M02779BC_DC/01A | |
| CHK'D RAF | | SCALE NONE | |
| | | PART NO. SEE SHEETS 2, 3 & 4 | |
| | | DRAWING NO. 02779-11 | |
| | | SHEET 4 OF 4 | |
| | | SIZE A | |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru