

P-channel 4V (G-S) MOSFET

FEATURES

- Low On Resistance
- Ultra High Speed Switching
- -4V Driving
- EU RoHS Compliant, Pb Free

APPLICATIONS

- Switching

PRODUCT NAME

PRODUCT NAME	PACKAGE	ORDER UNIT
XP202A0003MR-G	SOT-23	3,000/Reel

* The "-G" suffix denotes Halogen and Antimony free as well as being fully EU RoHS compliant.


ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNITS
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current (DC)	I_D	-3	A
Drain Current(Pulse) ^(*1)	I_{DP}	-12	A
Channel Power Dissipation ^(*2)	P_d	1	W
Channel Temperature	T_{ch}	+150	°C
Storage Temperature	T_{stg}	- 55 ~ +150	°C

(*1) $PW \leq 10 \mu s$, duty cycle $\leq 1\%$

(*2) Ceramic Board (900mm² × 0.8mm) Mounting

PIN CONFIGURATION





1. Gate
2. Source
3. Drain

SOT-23(TOP VIEW)


ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNITS
			MIN.	TYP.	MAX.	
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$I_D = -1mA, V_{GS} = 0V$	-30	-	-	V
Drain-Source Cut-Off Current	I_{DSS}	$V_{DS} = -30V, V_{GS} = 0V$	-	-	-1	μA
Gate-Source Leakage Current	I_{GSS}	$V_{GS} = \pm 16V, V_{DS} = 0V$	-	-	± 10	μA
Gate-Source Cut-Off Voltage	$V_{GS(off)}$	$V_{DS} = -10V, I_D = -1mA$	-1.2	-	-2.6	V
Forward Transfer Admittance	$ y_{fs} $	$V_{DS} = -10V, I_D = -3A$	-	8.0	-	S
Drain-Source ON Resistance	$R_{DS(ON)1}$	$I_D = -1.5A, V_{GS} = -10V$	-	45	-	m Ω
	$R_{DS(ON)2}$	$I_D = -1.0A, V_{GS} = -4.5V$	-	67	-	m Ω
	$R_{DS(ON)3}$	$I_D = -1.0A, V_{GS} = -4V$	-	76	-	m Ω
Input Capacity	C_{iss}	$V_{DS} = -10V, f = 1MHz$	-	435	-	pF
Output Capacity	C_{oss}	$V_{DS} = -10V, f = 1MHz$	-	110	-	pF
Feedback capacity	C_{rss}	$V_{DS} = -10V, f = 1MHz$	-	85	-	pF
Turn on Delay time	$t_{d(on)}$	$I_D = -1A$	-	6	-	ns
Rise Time	t_r	$I_D = -1A$	-	12	-	ns
Turn off Delay Time	$t_{d(off)}$	$I_D = -1A$	-	28	-	ns
Fall Time	t_f	$I_D = -1A$	-	10	-	ns
All Gate Charge Amount	Q_g	$V_{DS} = -15V, V_{GS} = -10V, I_D = -3A$	-	10	-	nC
Gate Source Charge Amount	Q_{gs}	$V_{DS} = -15V, V_{GS} = -10V, I_D = -3A$	-	1.2	-	nC
Gate Drain Charge Amount	Q_{gd}	$V_{DS} = -15V, V_{GS} = -10V, I_D = -3A$	-	2.2	-	nC
Diode Forward Voltage	V_{SD}	$I_S = -3A, V_{GS} = 0V$	-	-0.8	-1.2	V

SWITCHING-TIME TEST CIRCUIT

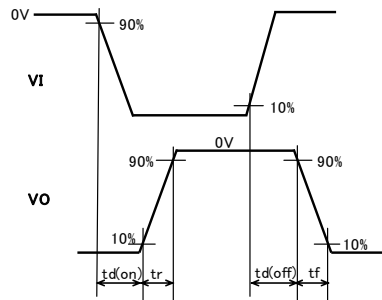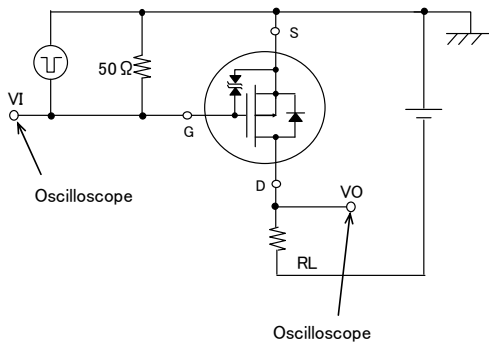


EQUIVALENT CIRCUIT

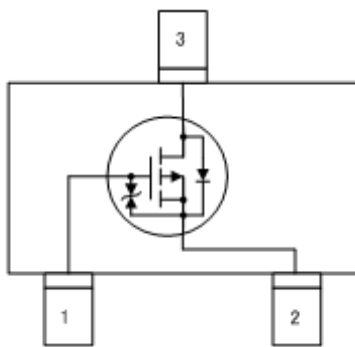


PACKAGING INFORMATION

SOT-23

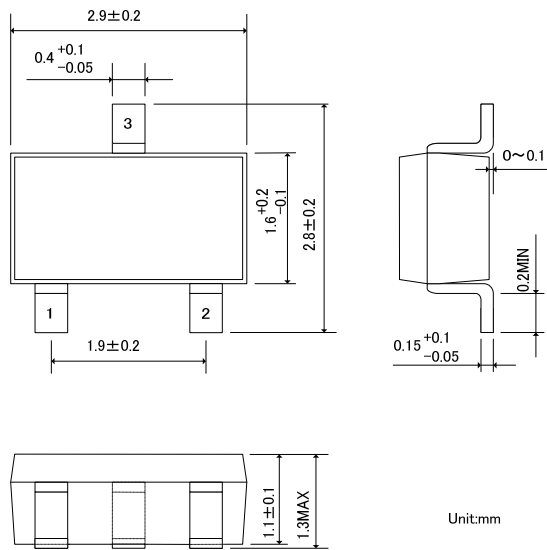

Unit:mm

MARKING RULE



① represents product series

MARK	PRODUCT SERIES
6	XP202*****-G

② ③ represents product group and number


MARK		PRODUCT GROUP	PRODUCT NUMBER	PRODUCT SERIES
②	③			
A	D	00	03	XP202A0003**-G

④, ⑤ represents production lot number


01 to 09, 0A to 0Z, 11 to 9Z, A1 to A9, AA to Z9, ZA to ZZ repeated (G, I, J, O, Q, W excluded)

TYPICAL PERFORMANCE CHARACTERISTICS


(1) Drain Current vs. Drain-Source Voltage

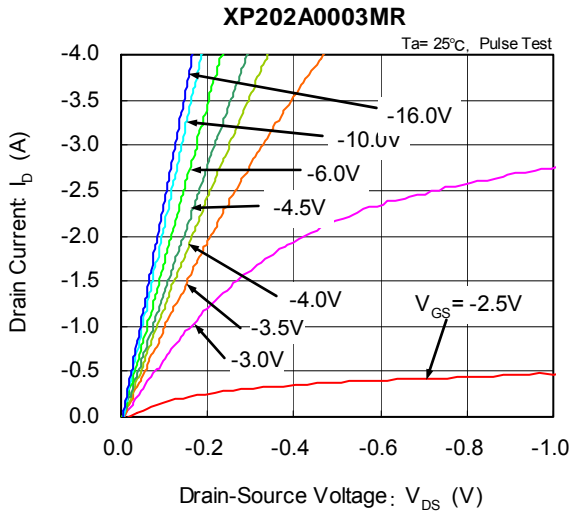


(2) Drain Current vs. Drain-Source Voltage

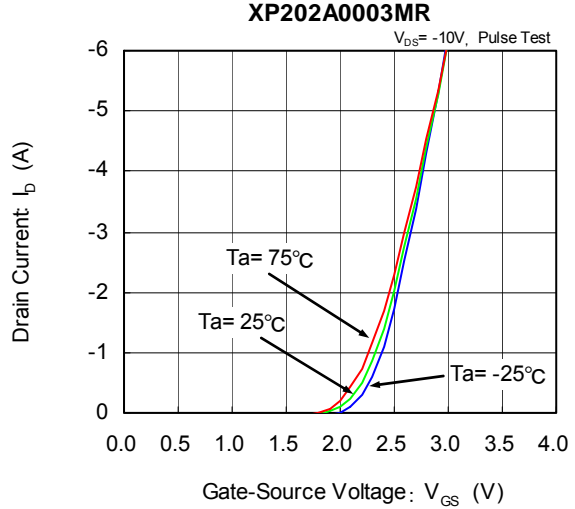


(3) Drain-Source On-State Resistance vs. Gate-Source Voltage

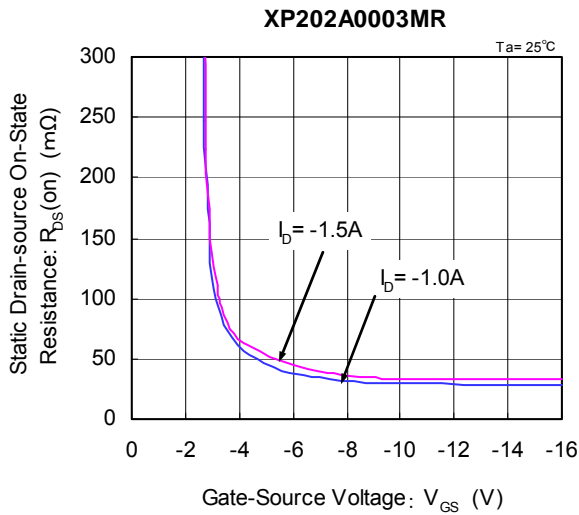


(4) Drain-Source On-State Resistance vs. Ambient Temperature

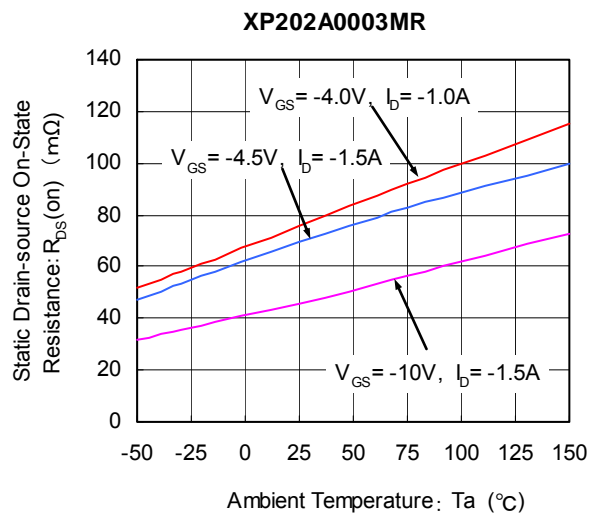

(5) Forward Transfer Admittance vs. Drain Current

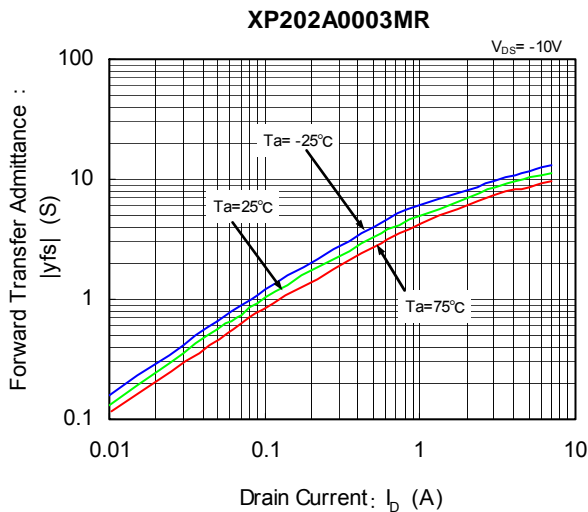


(6) Source Current vs. Diode Forward Voltage

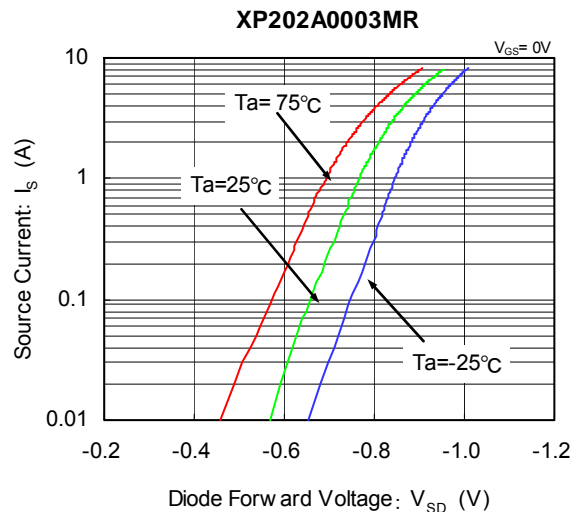


TYPICAL PERFORMANCE CHARACTERISTICS


(7) Switching Time vs. Drain Current

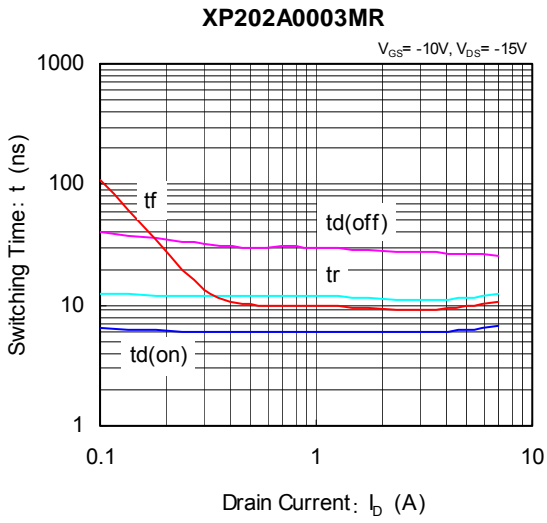


(8) $C_{iss}, C_{oss}, C_{rss}$ vs. Drain-Source Voltage

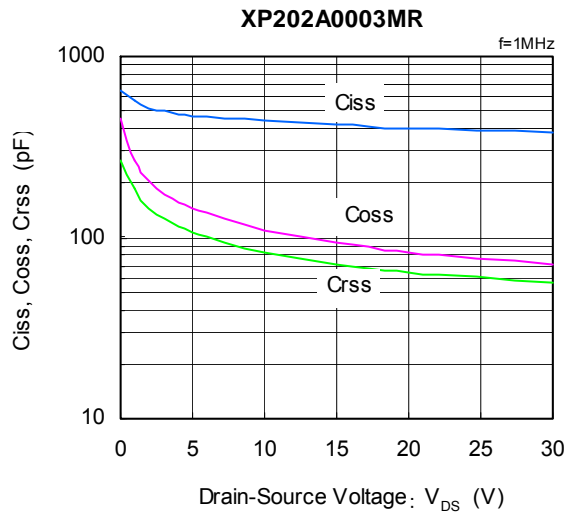

(9) Gate-Source Voltage vs. Gate Charge

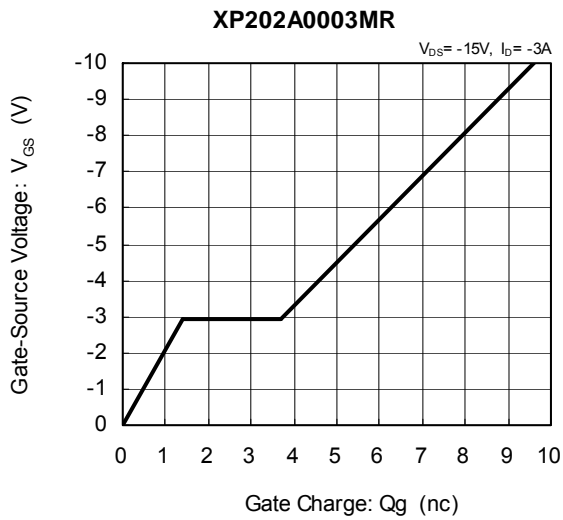

(10) Area of Safe Operation

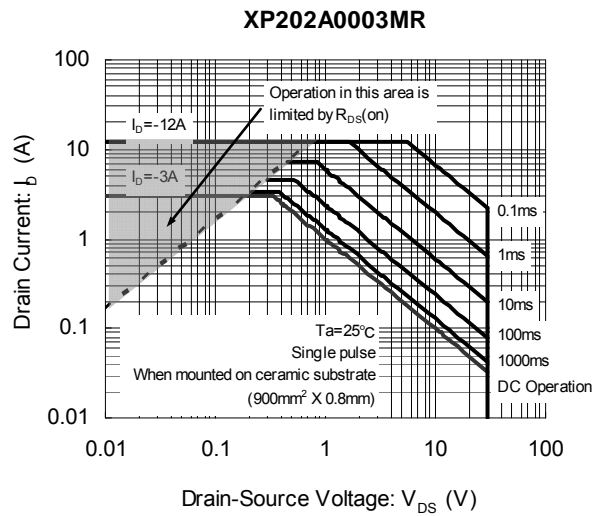

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this datasheet.
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this datasheet.
4. The products in this datasheet are not developed, designed, or approved for use with such equipment whose failure or malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.
(e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this datasheet within the specified ranges.
Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this datasheet may be copied or reproduced without the prior permission of TOREX SEMICONDUCTOR LTD.

TOREX SEMICONDUCTOR LTD.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru