



Optimus

MA220.LB.001

Specification

Part No.	MA220.LB.001
Product Name	Optimus MA220 2in1 - GPS-GLONASS - LTE External Adhesive Antenna for Glass and Plastic Mount
Feature	GPS-GLONASS - High gain LNA up to 32dB 4G LTE band – 698 MHz to 27000MHz Covers legacy worldwide 2G and 3G bands LTE/GSM/CDMA/PCS/DCS/UMTS/GPRS/EDGE/HSPA IP67 Height 12mm Diameter 62.8mm RoHS Compliant

1. Introduction

The Optimus MA220 is a combination high performance GPS-GLONASS and 2G/3G/4G LTE (plus GSM /CDMA/PCS/DCS/UMTS/GPRS/EDGE/HSPA) antenna to simplify Automotive Telematic and Fleet management systems worldwide. Its high quality low profile covert housing can be attached onto the glass or even out of sight under the dashboard. This combination of a high gain GPS/Glonass antenna and a LTE antenna is ideal for those applications that require durability, small size and covert installation, and reliable reception and transmission crossing through different mobile networks.

The LTE cellular antenna function covers all main LTE and 2G/3G cellular

bands worldwide. It has been designed to work equally well when mounted on glass or on plastic. It is not suitable for mounting on metal.

The GPS/Glonass function means increased accuracy and reliability of location. A front-end SAW protects the LNA from burnout by nearby out of band cellular transmissions and also significantly reduces any compression and consequent reduction of sensitivity.

The standard version has 3 metres RG174 cable and SMA(M) connector on both GPS/Glonass and LTE. For even higher gain and efficiency we recommend if you can to use shorter cable lengths, as shown in the charts below.

The cable lengths and connector types are completely customizable according to customer request, subject to a minimum order quantity.

The slim housing is fully IP67 waterproof. A separate automotive approved 3M adhesive pad is provided, allowing the antenna to be mounted correctly facing through glass, or directly onto a plastic surface like the dashboard of a vehicle.

Note if US LTE network certification is required contact Taoglas for advice on correct antenna choice.

1.1 Features

GPS/GLONASS

High LNA Gain up to 32 dB
Antenna Gain 30 ± 2 dB
Low Noise 1.5 dB max

LTE

Advanced 4G LTE antenna with 2G/3G application bands included
LTE/GSM/CDMA/PCS/DCS/UMTS/GPRS/EDGE/ HSPA

Other

Ultrasonically Welded - Water Resistant IP 67
UV Resistant
Quality textured covert design. Low profile
Comes with automotive approved high grade 3M double sided tape for quick and easy mounting
Customizable cables and connectors

2. Specification

2G/3G/4G Antenna

	LTE	LTE Band 20	GSM850	GSM900	DCS	PCS	WCDMA I / UMTS	WiFi	LTE
Frequency (MHz)	698~798	791~862	824~894	880~960	1710~1880	1850~1990	1920~2170	2400~2500	2570~2690
Free Space									
Peak Gain (dBi)*	-1.54	-0.53	-0.53	-1.07	-0.10	0.72	0.89	-2.40	-1.59
Average Gain (dBi)*	-7.21	-6.02	-5.71	-8.20	-6.46	-6.10	-5.99	-7.39	-7.40
Efficiency (%)*	19.12	25.29	27.38	16.20	22.62	24.62	25.22	18.27	18.21
On 2mm Thickness ABS									
Peak Gain (dBi)*	-1.13	-0.05	-0.05	-1.91	2.21	1.68	1.63	-3.36	-0.63
Average Gain (dBi)*	-6.72	-4.78	-5.01	-7.96	-6.01	-4.99	-5.73	-9.07	-7.64
Efficiency (%)*	21.66	33.32	31.52	16.59	25.37	31.75	28.06	12.36	17.21
On Glass									
Peak Gain (dBi)*	-0.71	-0.35	-0.35	-2.03	1.76	1.71	1.48	-2.94	-1.31
Average Gain (dBi)*	-6.44	-4.99	-5.36	-8.37	-5.76	-5.29	-6.18	-9.21	-8.04
Efficiency (%)*	23.01	31.79	29.03	14.93	26.78	29.61	25.07	11.97	15.70
Return loss (dB) *	< -5								
Polarization	Linear								
Impedance	50Ω								
Cable	3m RG174 standard, fully customizable								
Connector	SMA(M), standard, fully customizable								
Maximum Input Power	5W								

* **Note:** includes 3 metre RG174 cable loss

2. Specification

GPS-GLONASS

Center Frequency	GPS: 1575.42±3 MHz GLONASS: 1602±0.5 MHz
Gain	3 ±1 dBic typ.
VSWR	1.92:1 Max
Impedance	50Ω
Antenna Patch Size	25x25x4mm
Cable	3m RG174 standard, fully customizable
Connector	SMA(M), standard, fully customizable

LNA Electrical Properties

Center Frequency fc	GPS: 1575.42±3 MHz GLONASS: 1602±0.5 MHz
Impedance	50 Ω Nominal
VSWR	< 1.92:1
Return Loss	10 dB Min.
Gain	31 dB Min. @3.3V
DC Power Input	3.3V
Noise Figure @3.3V	1.5dB
Power Consumption	12mA

Mechanical

Antenna Dimensions	62.8mm x 68mm x 12mm
Casing	ABS
Waterproof	IP67

Environmental


Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 90°C
Humidity	Non-condensing 65°C 95% RH

* **Note:** includes 3 metre RG174 cable loss


3. LTE Antenna Characteristics

3.1 Return Loss

Free Space with RG174 Coaxial Cable

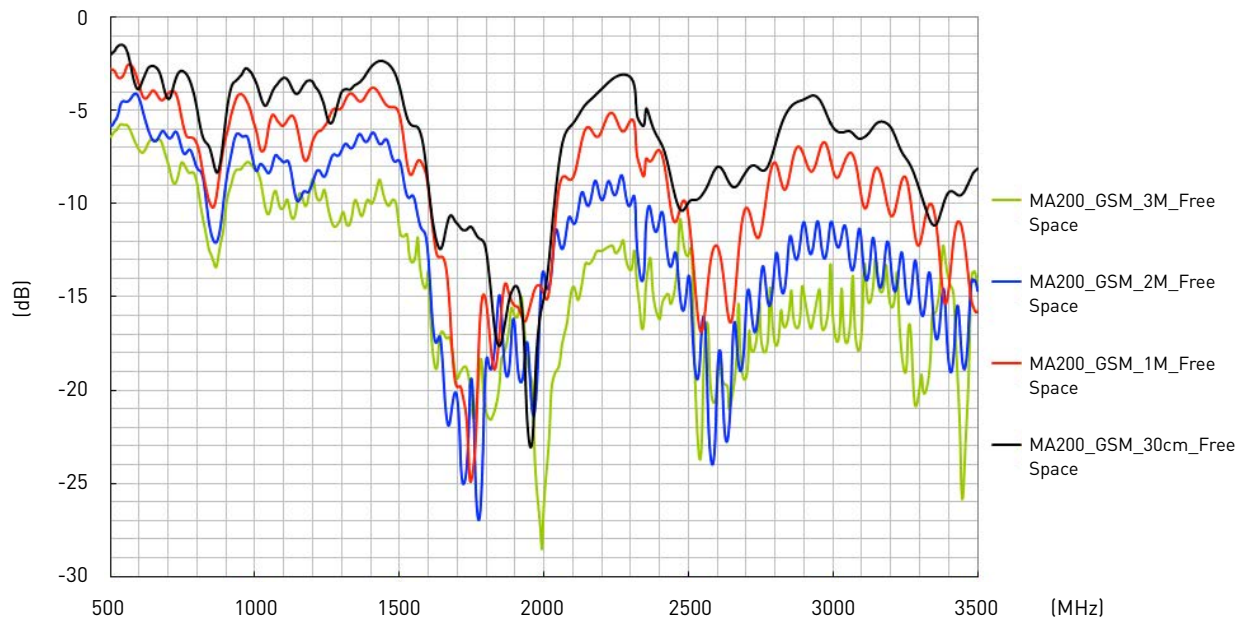


On 2mm thickness ABS Base with RG174 Coaxial Cable

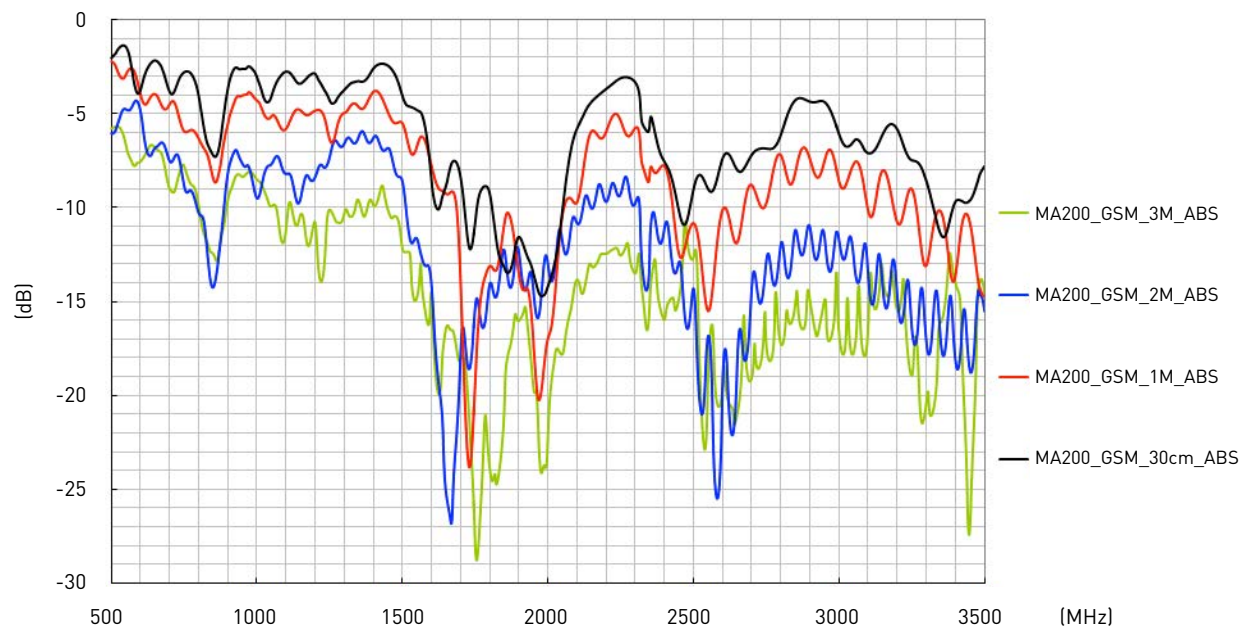

3. LTE Antenna Characteristics

3.1 Return Loss


On Glass Base with RG174 Coaxial Cable

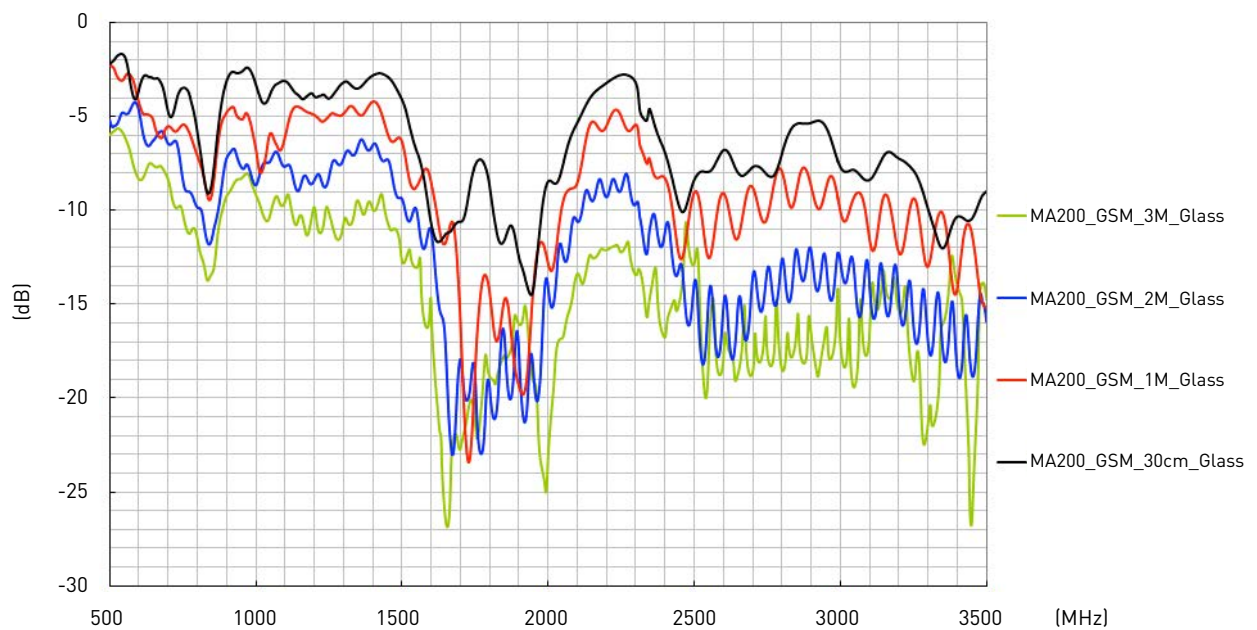


3. LTE Antenna Characteristics

3.2 Efficiency

Free Space with RG174 Coaxial Cable

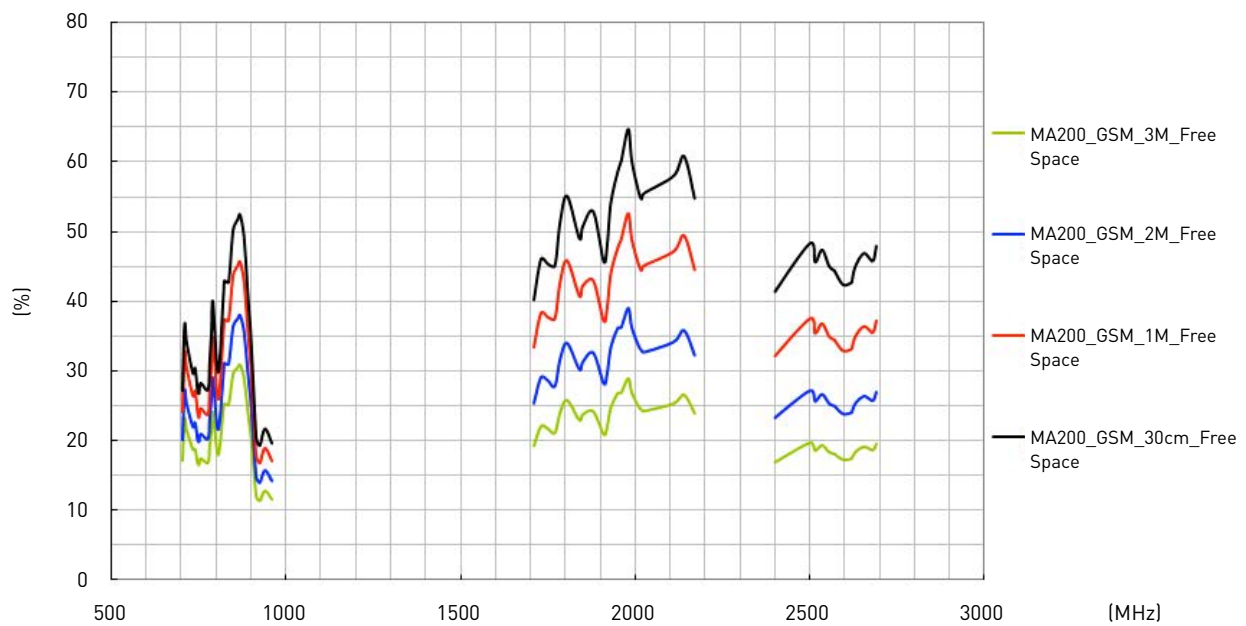


On 2mm thickness ABS Base with RG174 Coaxial Cable

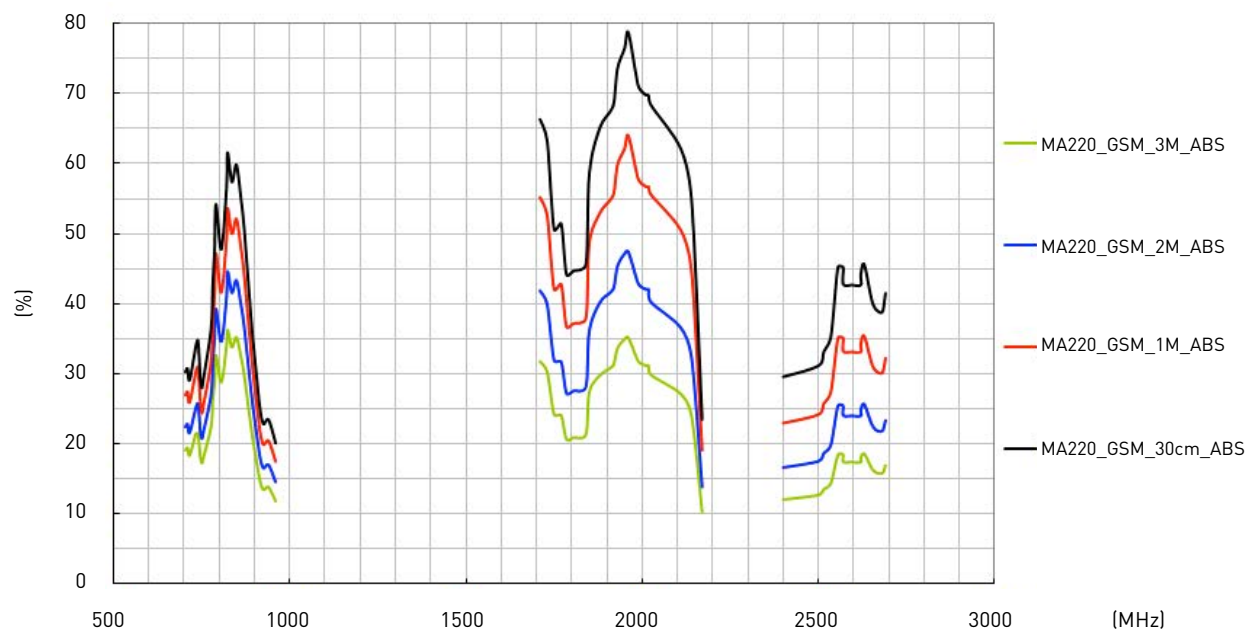

3. LTE Antenna Characteristics

3.2 Efficiency


On Glass Base with RG174 Coaxial Cable

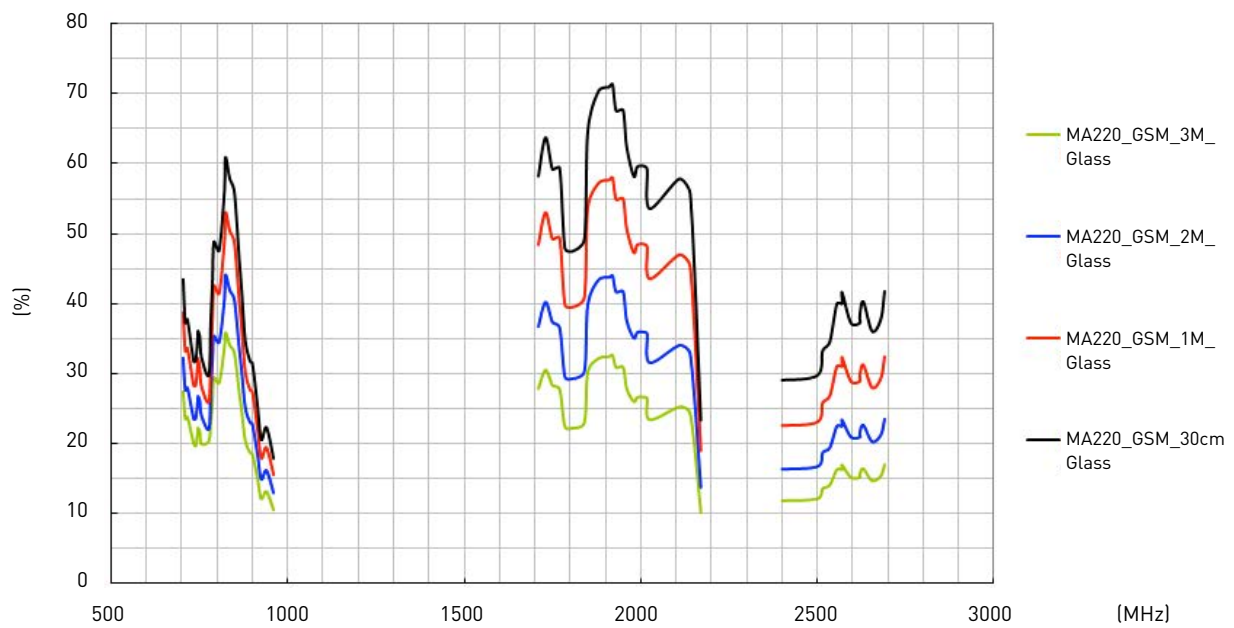


3. LTE Antenna Characteristics

3.3 Peak Gain

Free Space with RG174 Coaxial Cable

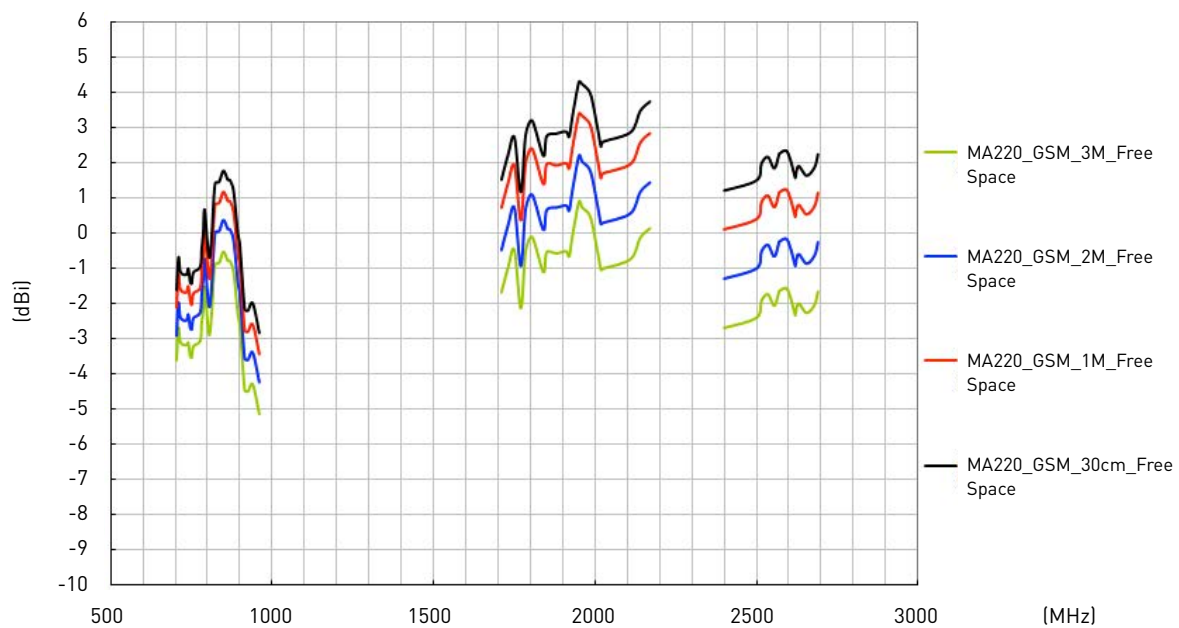


On 2mm thickness ABS Base with RG174 Coaxial Cable

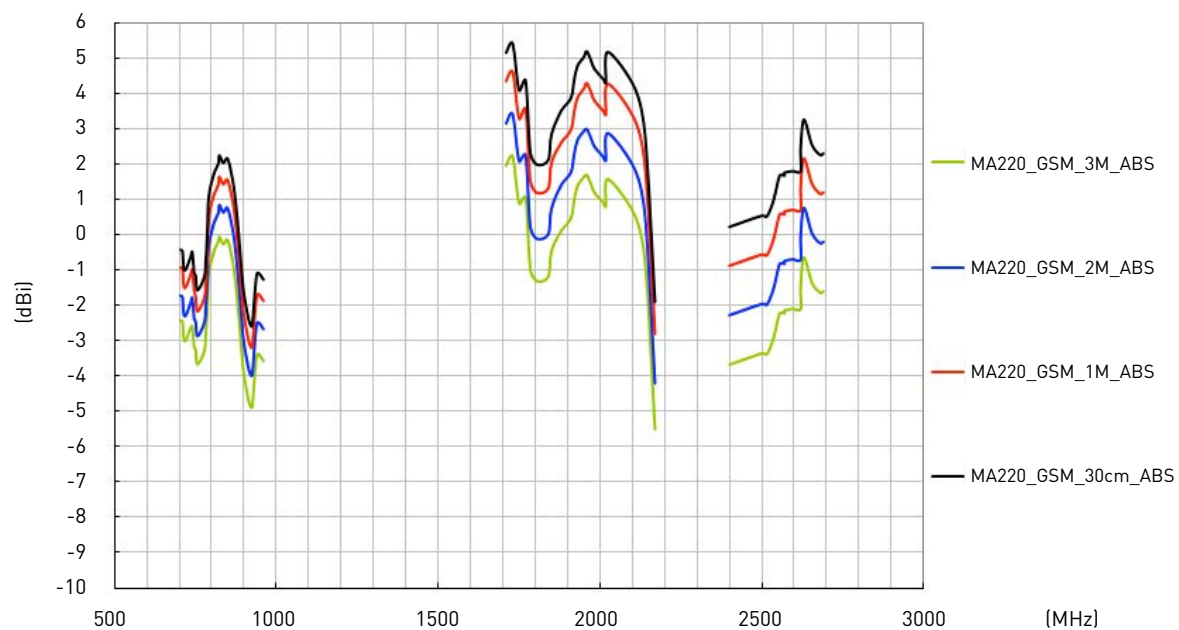

3. LTE Antenna Characteristics

3.3 Peak Gain


On Glass Base with RG174 Coaxial Cable

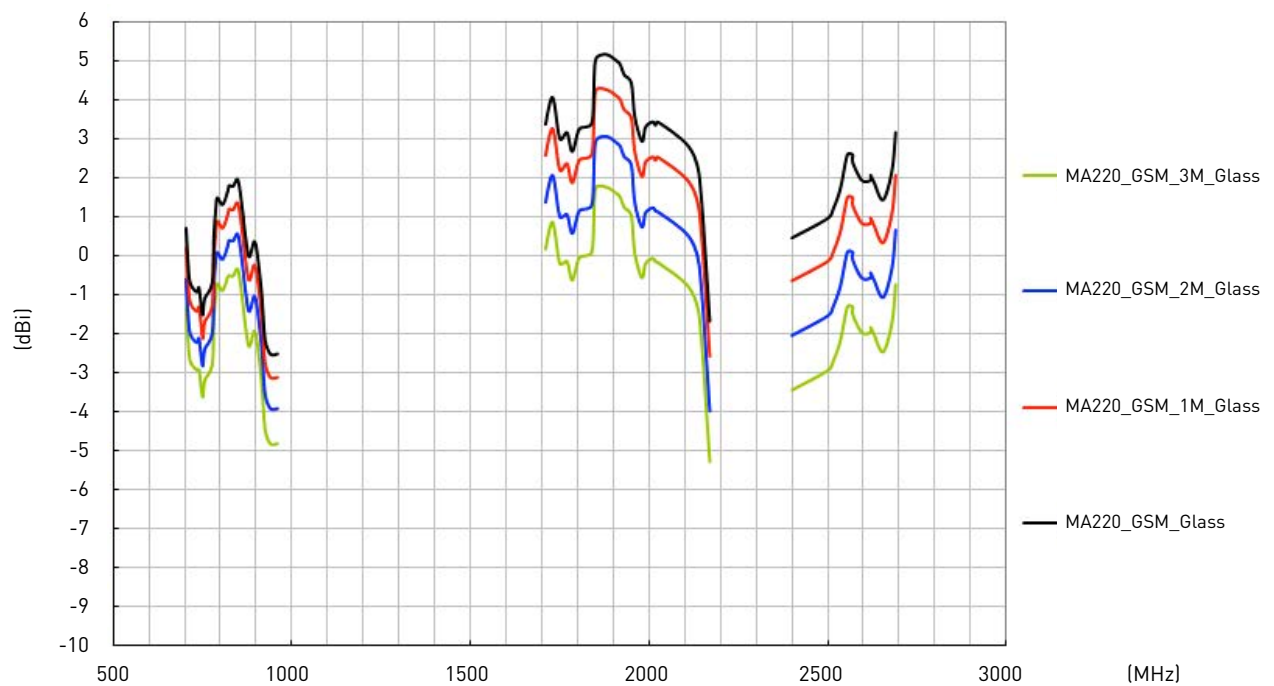


3. LTE Antenna Characteristics

3.4 Average Gain

Free Space with RG174 Coaxial Cable

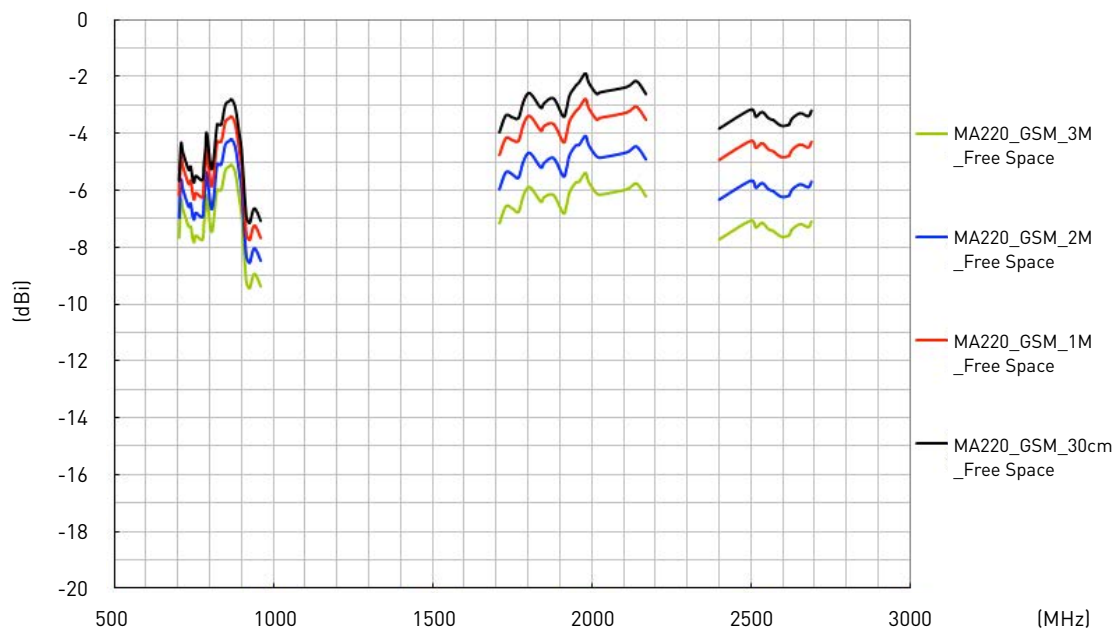


On 2mm thickness ABS Base with RG174 Coaxial Cable

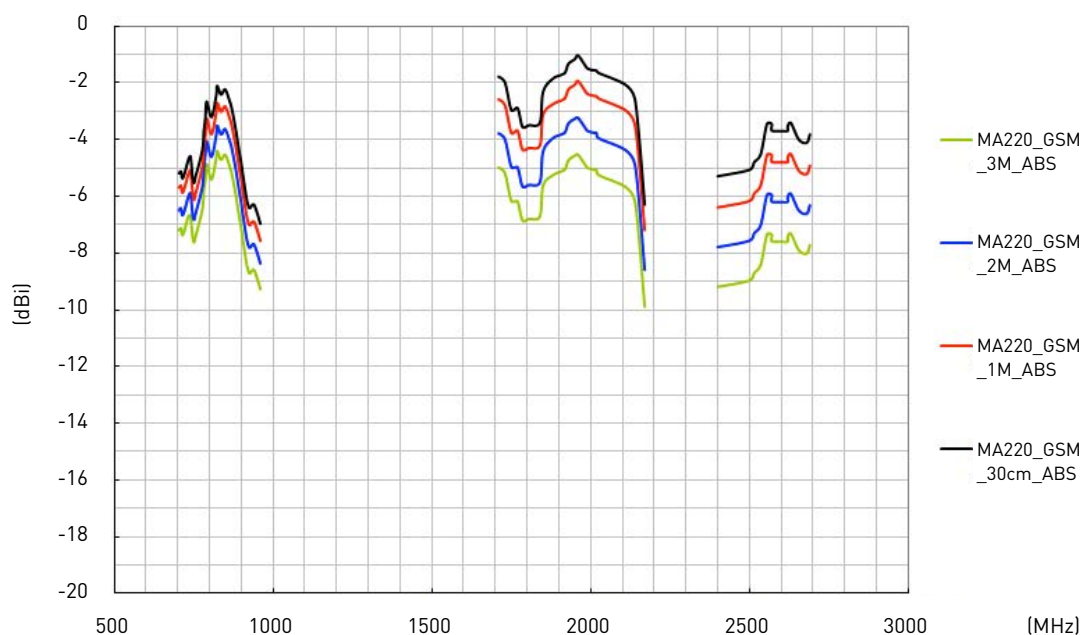

3. LTE Antenna Characteristics


3.4 Average Gain

On Glass Base with RG174 Coaxial Cable

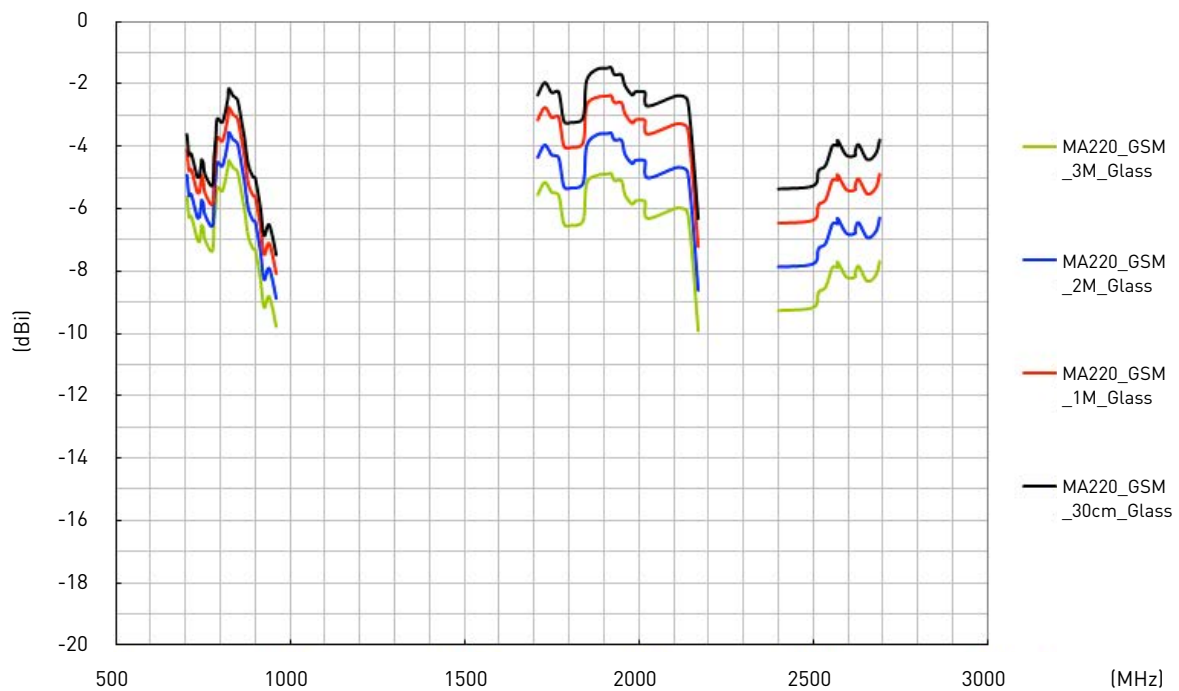


3. LTE Antenna Characteristics

3.5 Free Space Radiation Pattern - 3 meter length cable

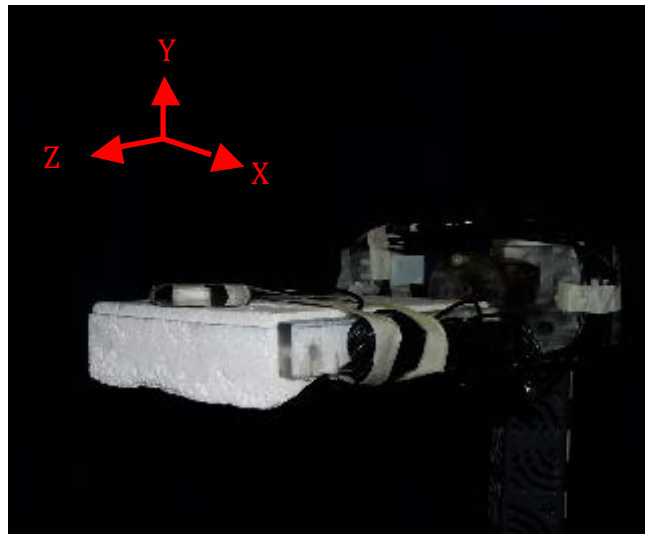


XY plane

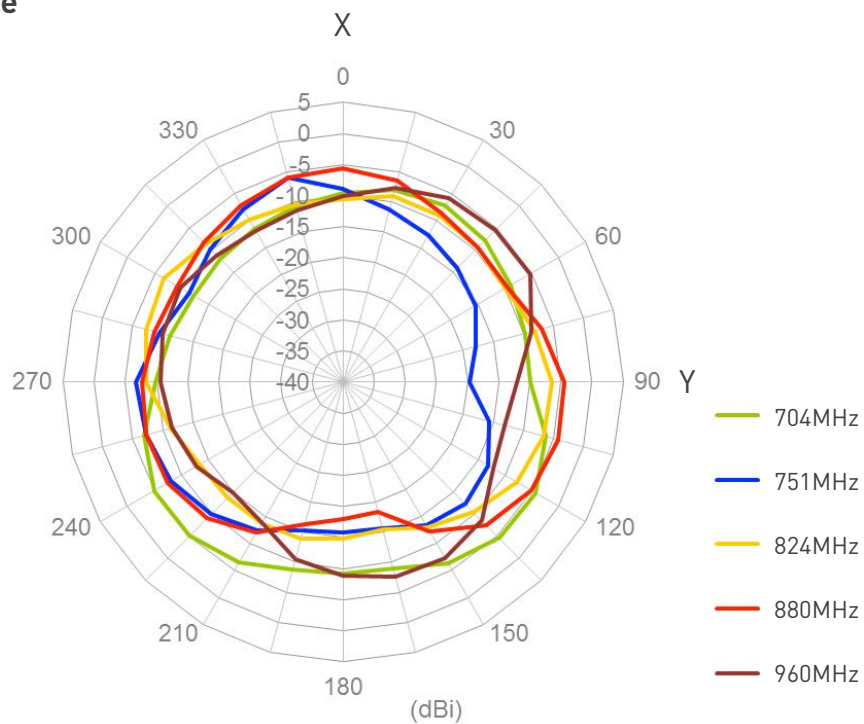


3. LTE Antenna Characteristics

3.5 Free Space Radiation Pattern - 3 meter length cable

XY plane

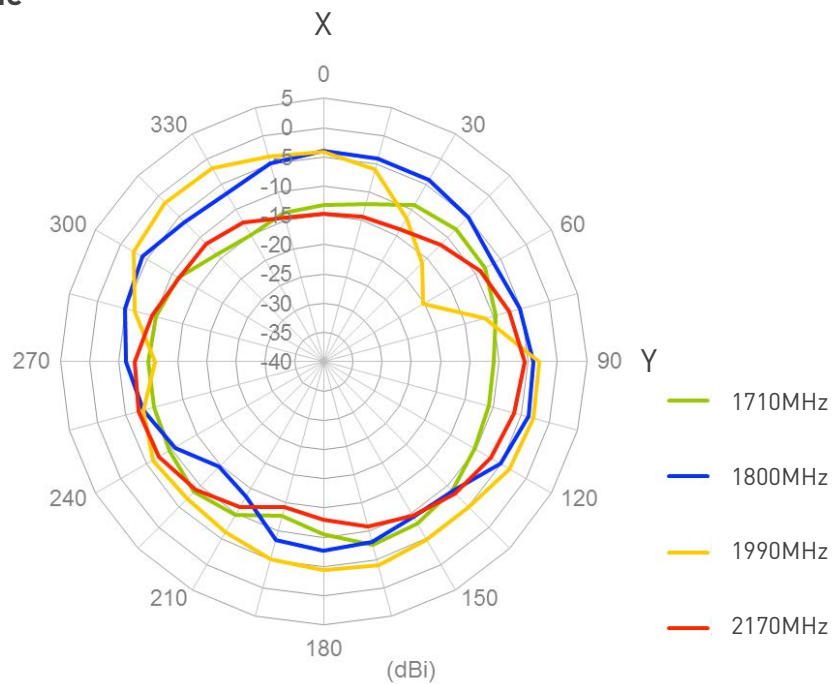


XY plane

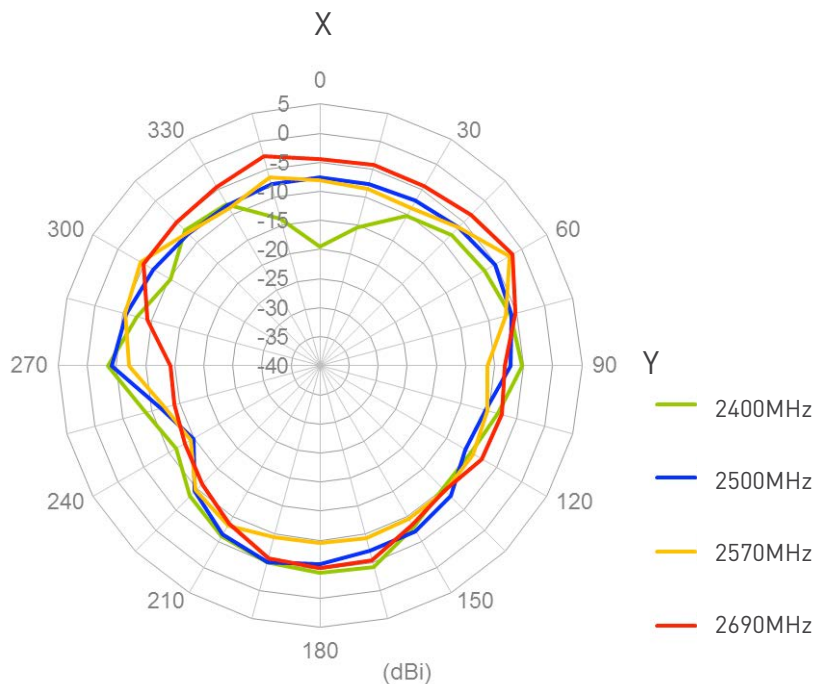

3. LTE Antenna Characteristics

3.5 Free Space Radiation Pattern - 3 meter length cable


XZ plane

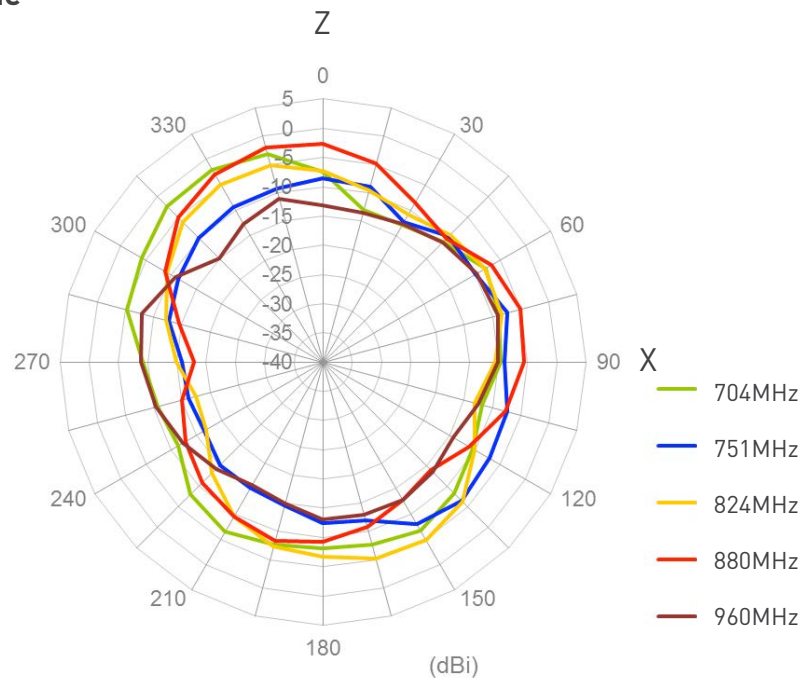


3. LTE Antenna Characteristics

3.5 Free Space Radiation Pattern - 3 meter length cable

XZ plane

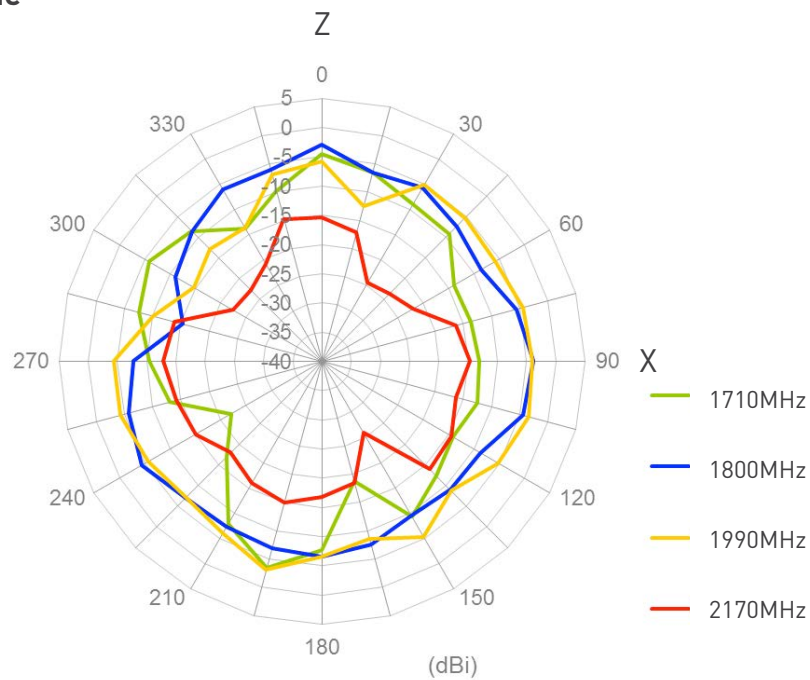


XZ plane

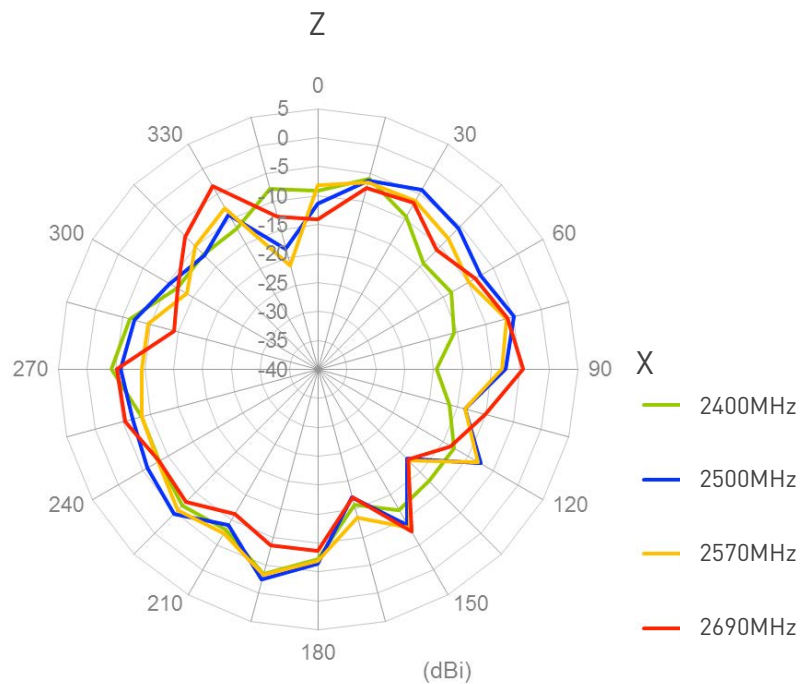


3. LTE Antenna Characteristics

3.5 Free Space Radiation Pattern - 3 meter length cable

YZ plane

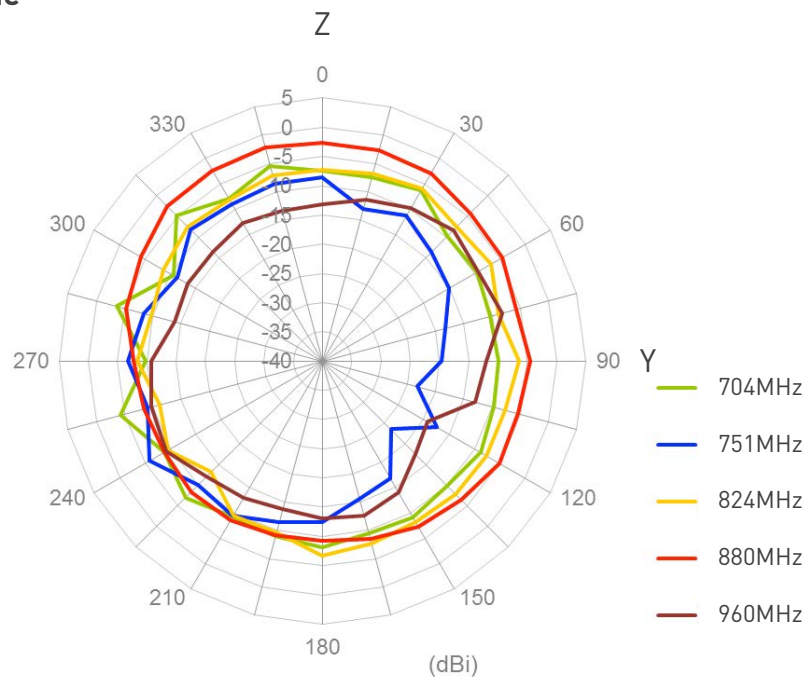


YZ plane

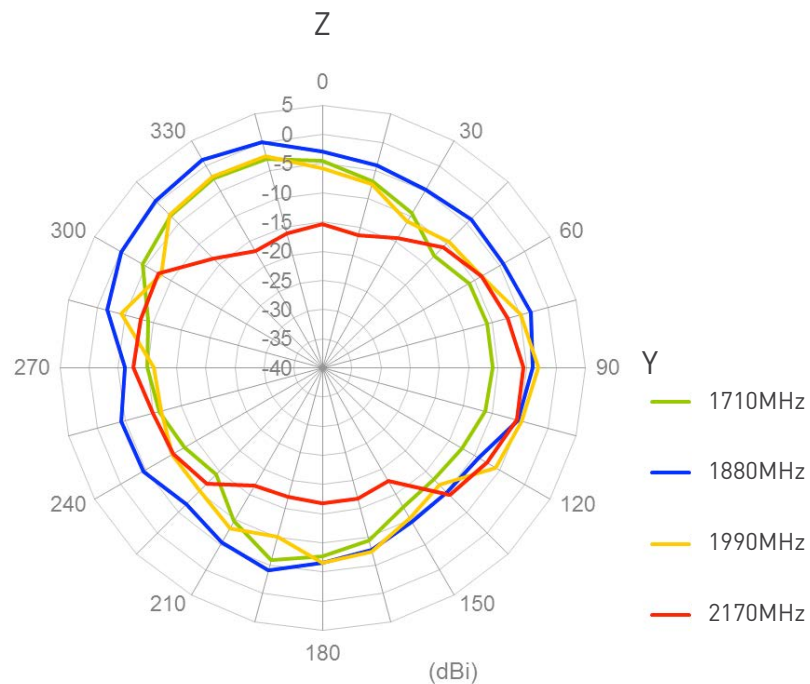

3. LTE Antenna Characteristics


3.5 Free Space Radiation Pattern - 3 meter length cable

YZ plane

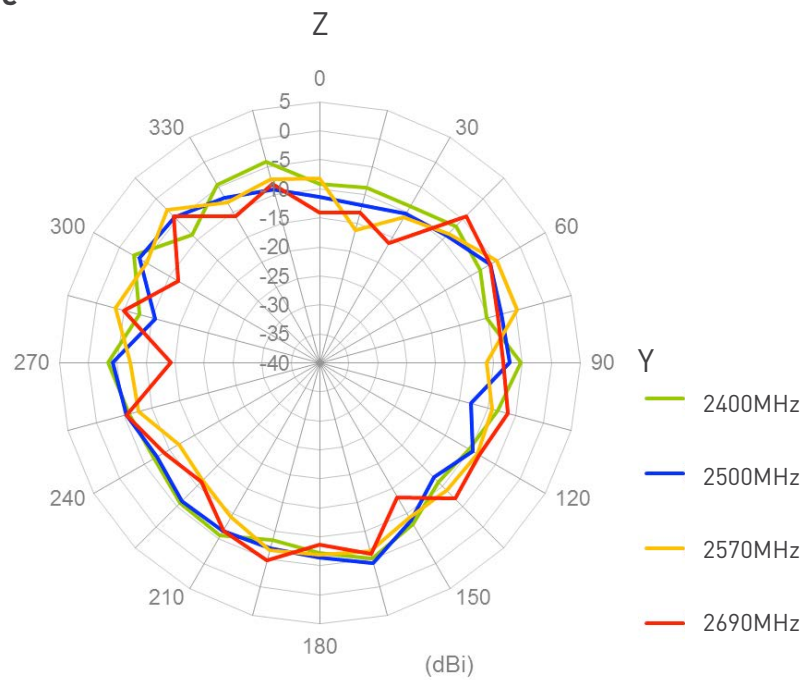


3. LTE Antenna Characteristics

3.6 On 2mm thickness ABS Base Radiation Pattern - 3meter length cable

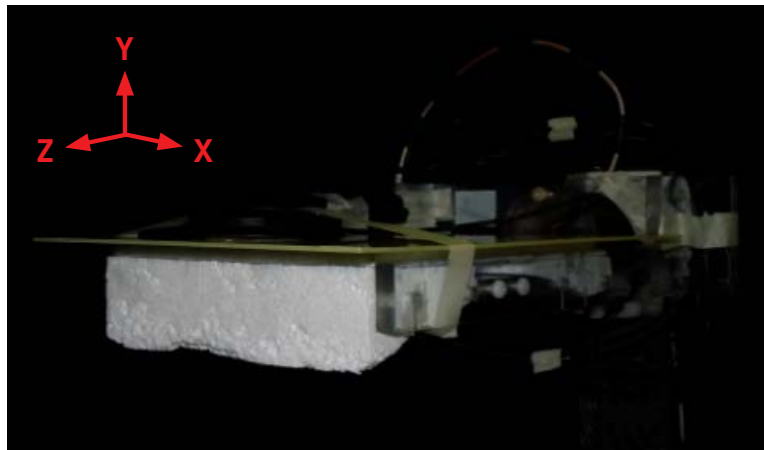


XY plane

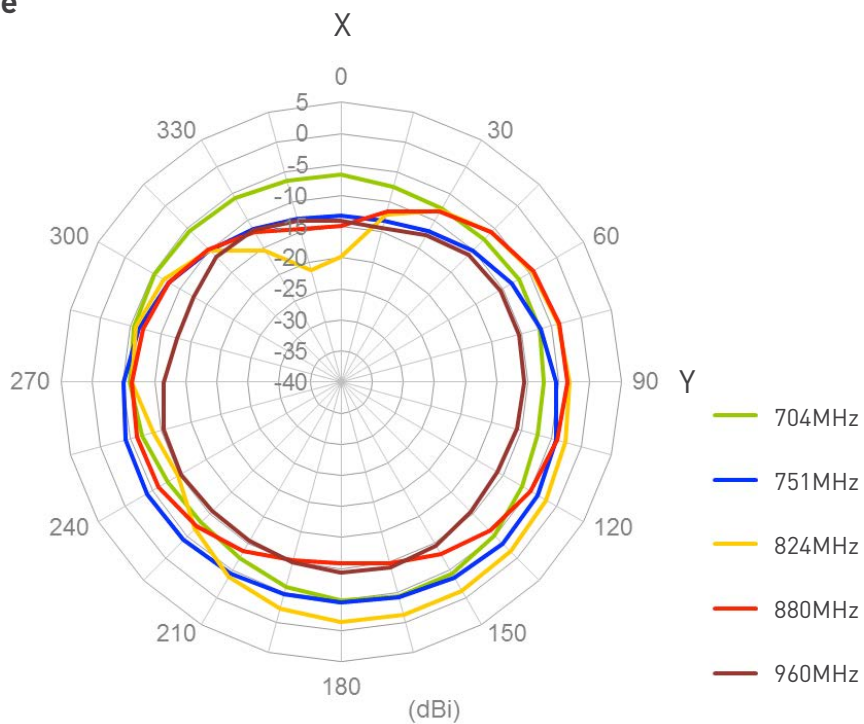


3. LTE Antenna Characteristics

3.5 Free Space Radiation Pattern - 3 meter length cable

XY plane

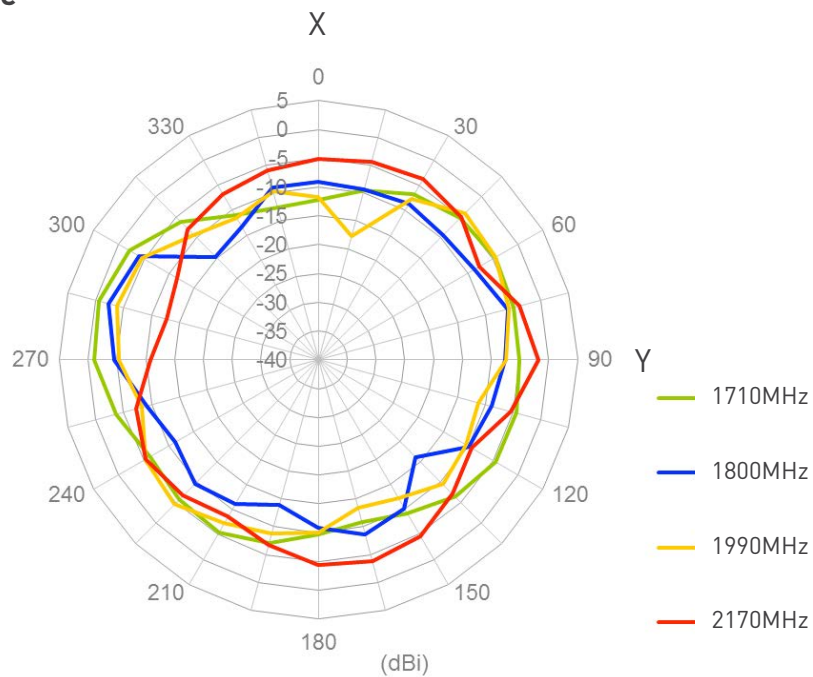


XY plane

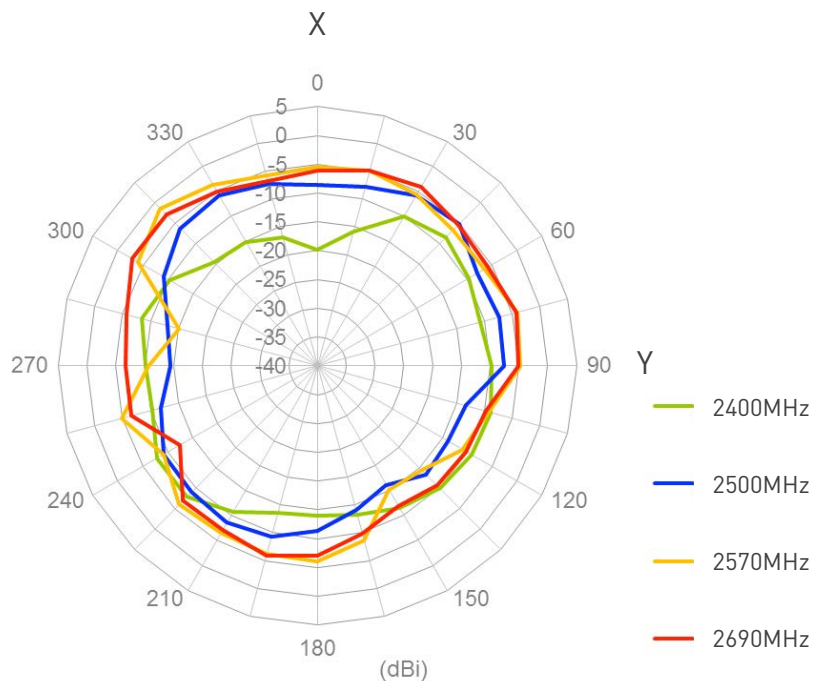


3. LTE Antenna Characteristics

3.5 Free Space Radiation Pattern - 3 meter length cable

XZ plane

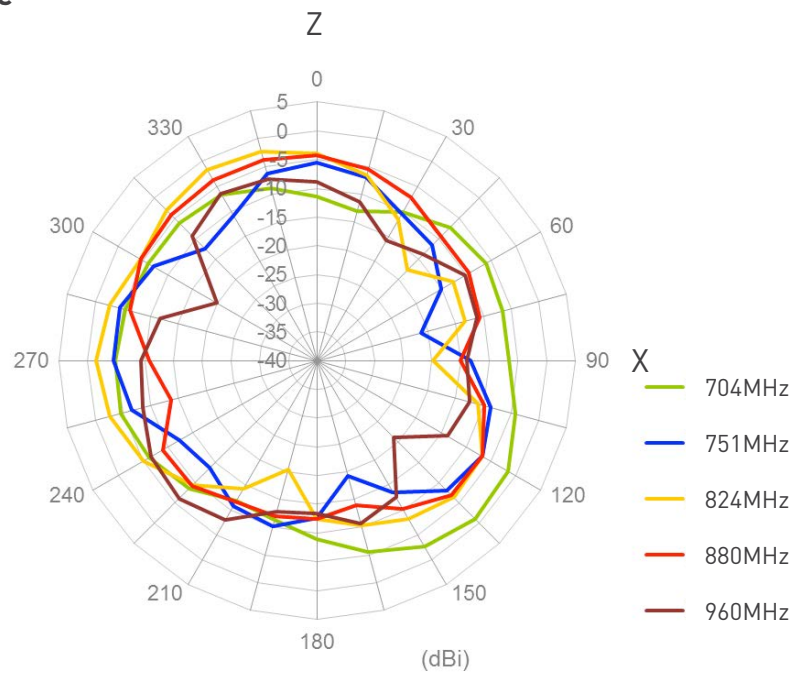


XZ plane

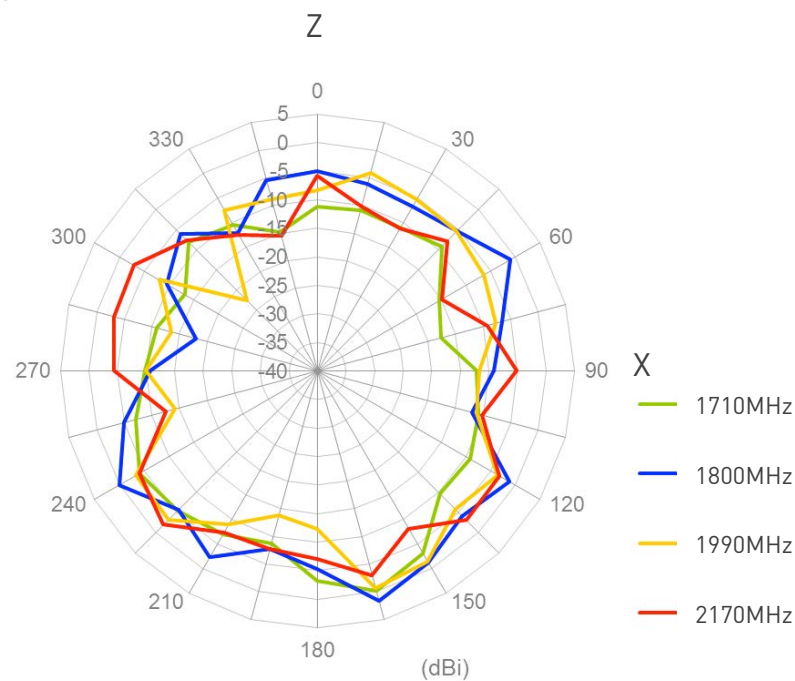


3. LTE Antenna Characteristics

3.5 Free Space Radiation Pattern - 3 meter length cable

XZ plane

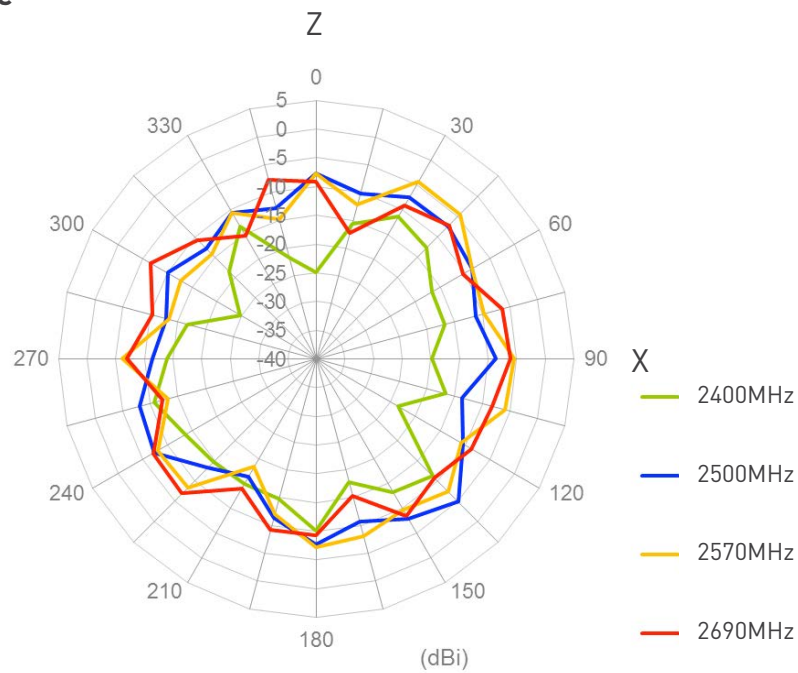


YZ plane

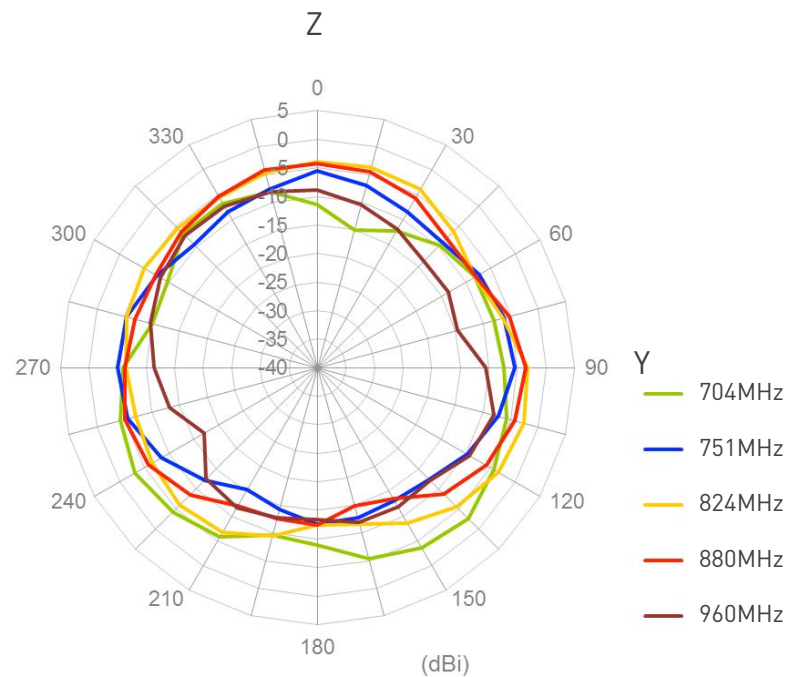


3. LTE Antenna Characteristics

3.5 Free Space Radiation Pattern - 3 meter length cable

YZ plane

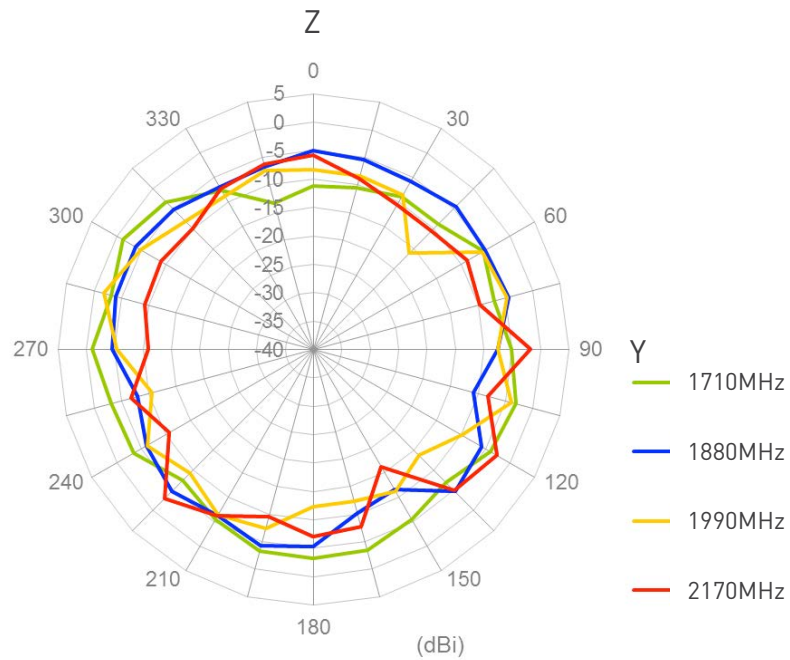


YZ plane

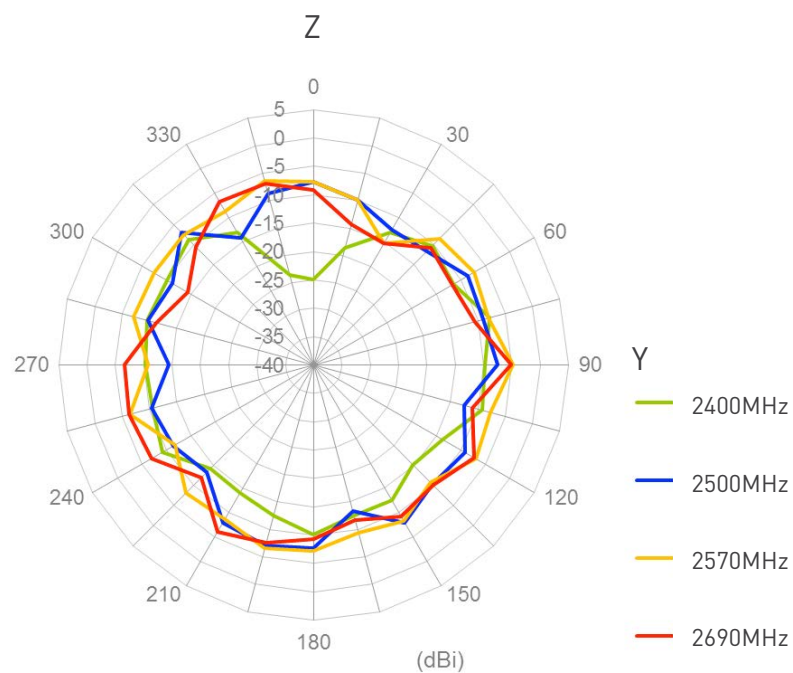


3. LTE Antenna Characteristics

3.7 On Glass Base Radiation Pattern - 3 meter length cable

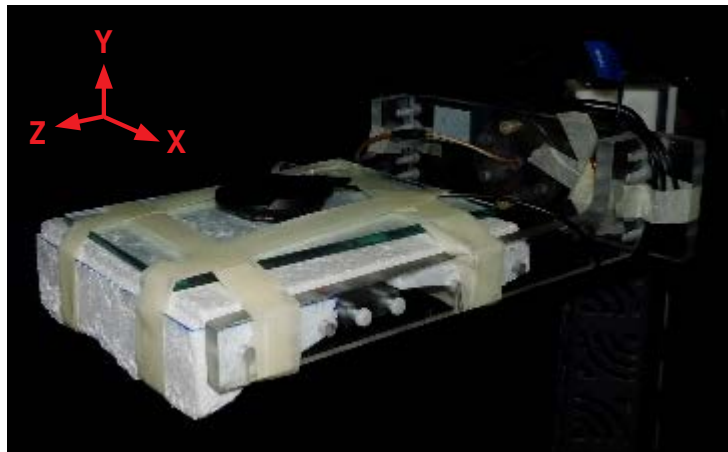


XY plane

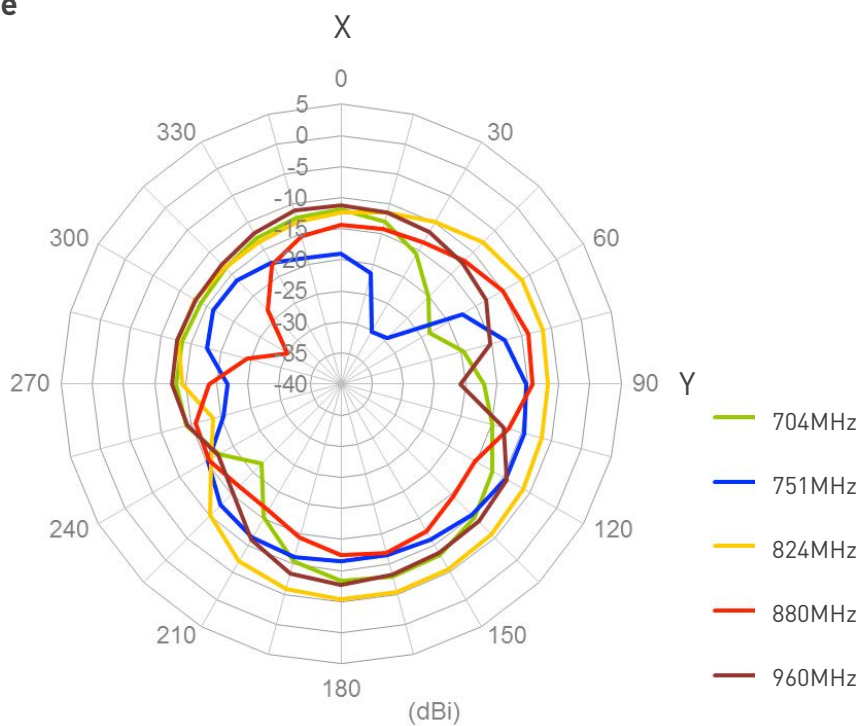


3. LTE Antenna Characteristics

3.7 On Glass Base Radiation Pattern - 3meter length cable

XY plane

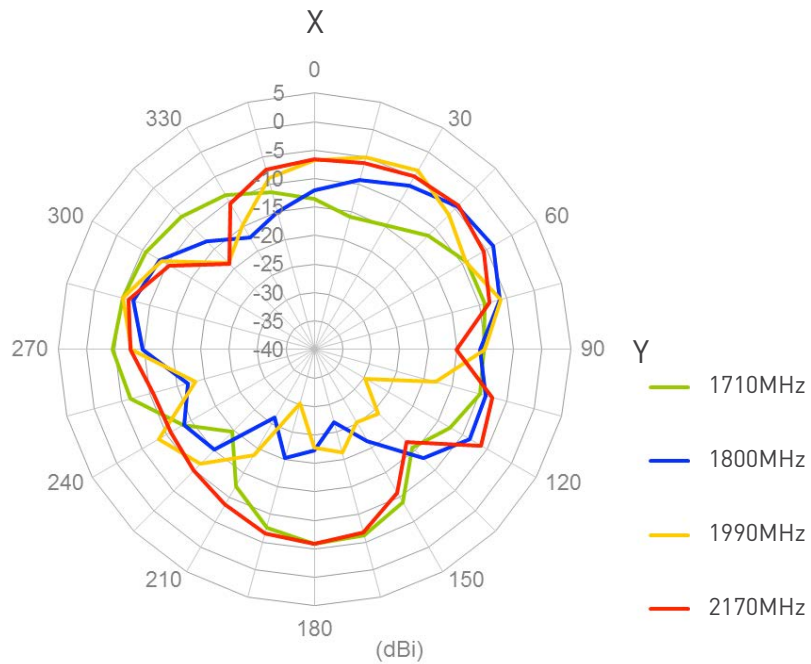


XY plane

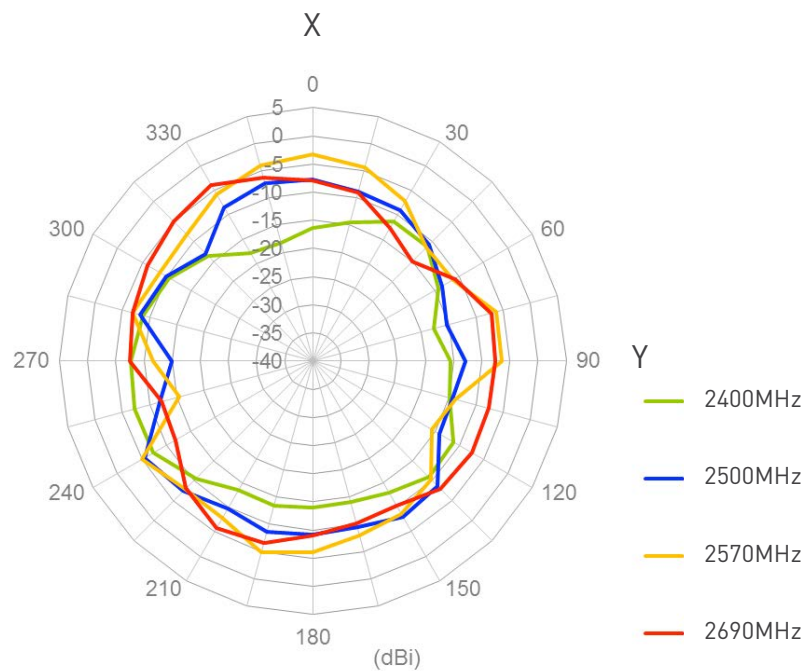


3. LTE Antenna Characteristics

3.7 On Glass Base Radiation Pattern - 3meter length cable

XZ plane

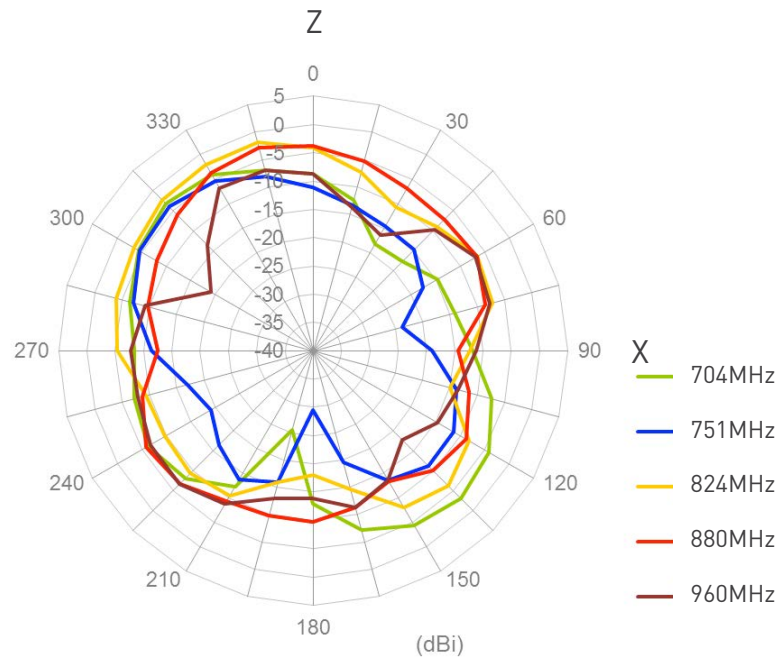


XZ plane

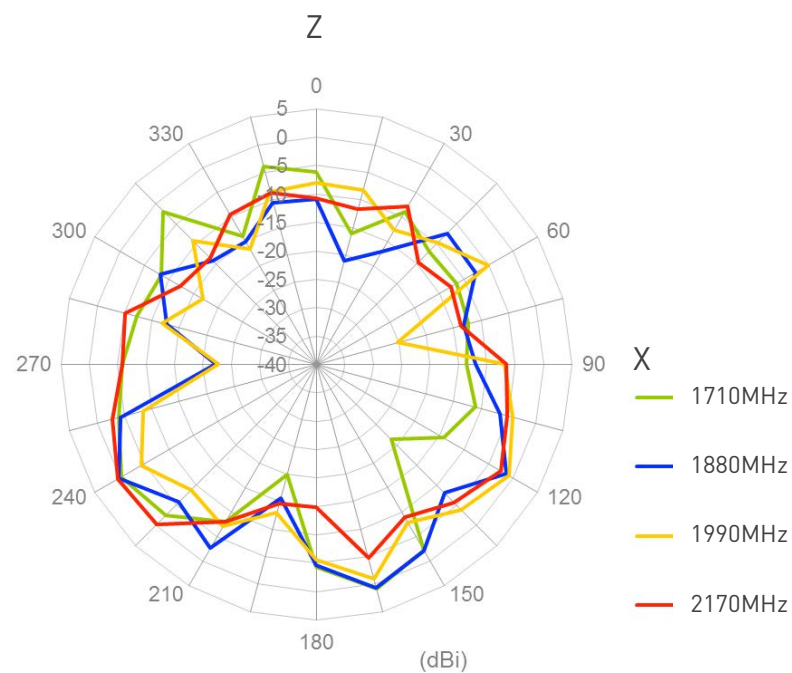


3. LTE Antenna Characteristics

3.7 On Glass Base Radiation Pattern - 3meter length cable

XZ plane

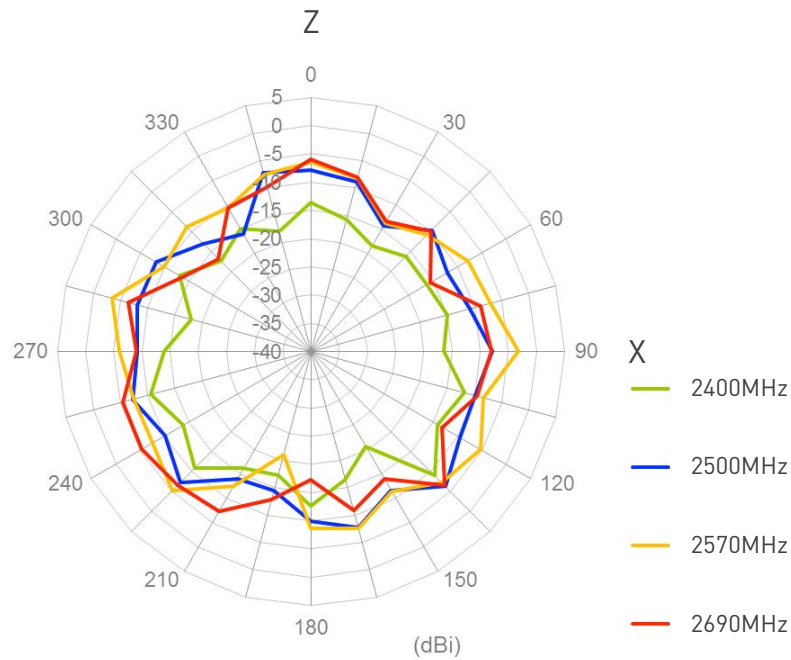


YZ plane

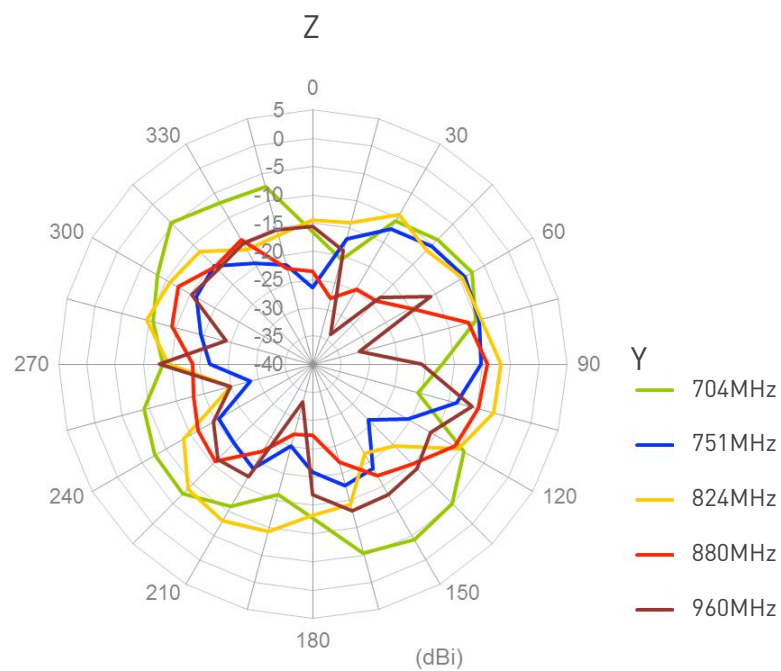


3. LTE Antenna Characteristics

3.7 On Glass Base Radiation Pattern - 3meter length cable

YZ plane

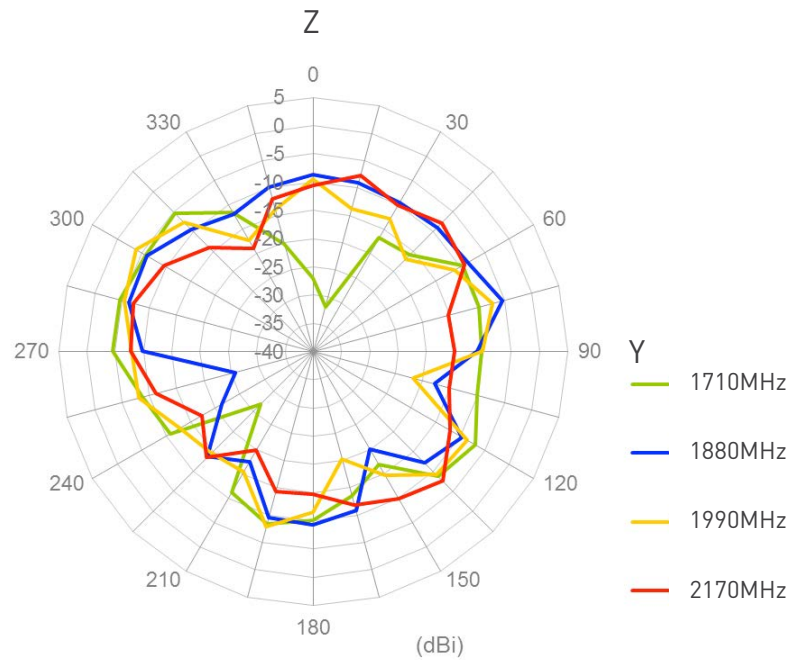


YZ plane

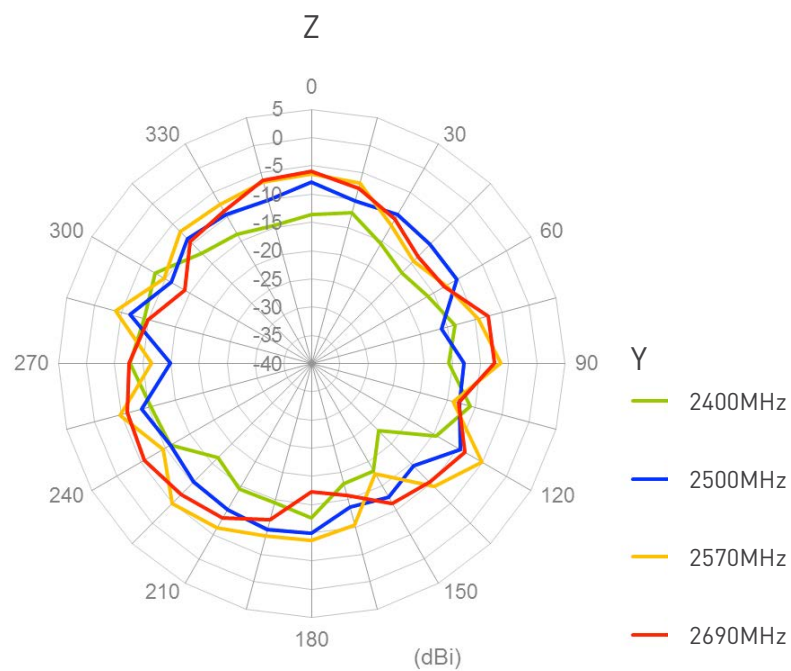


4. GPS-GLONASS Antenna Characteristics

4.1 Antenna Characteristics

Return Loss

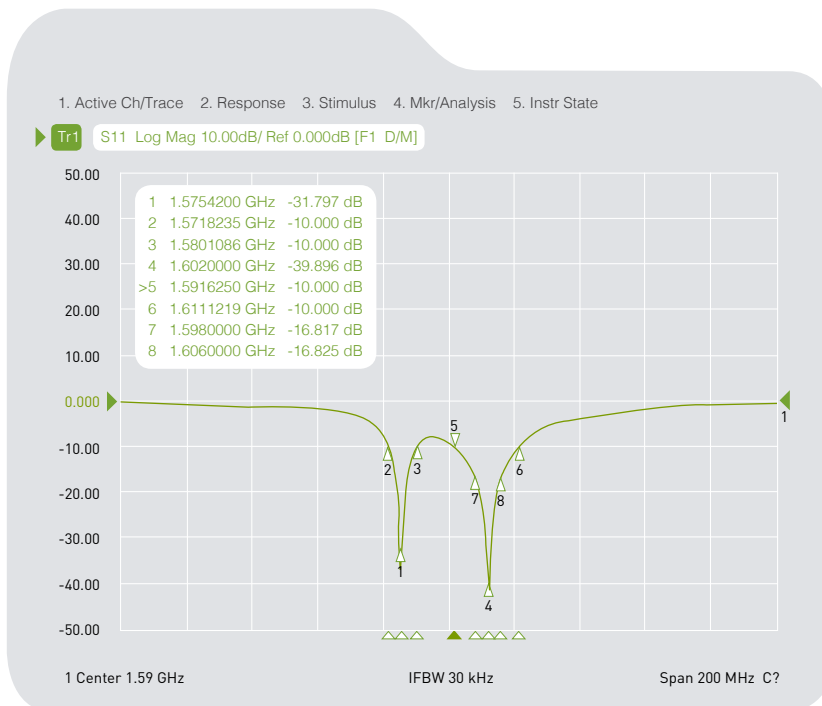

Smith Chart

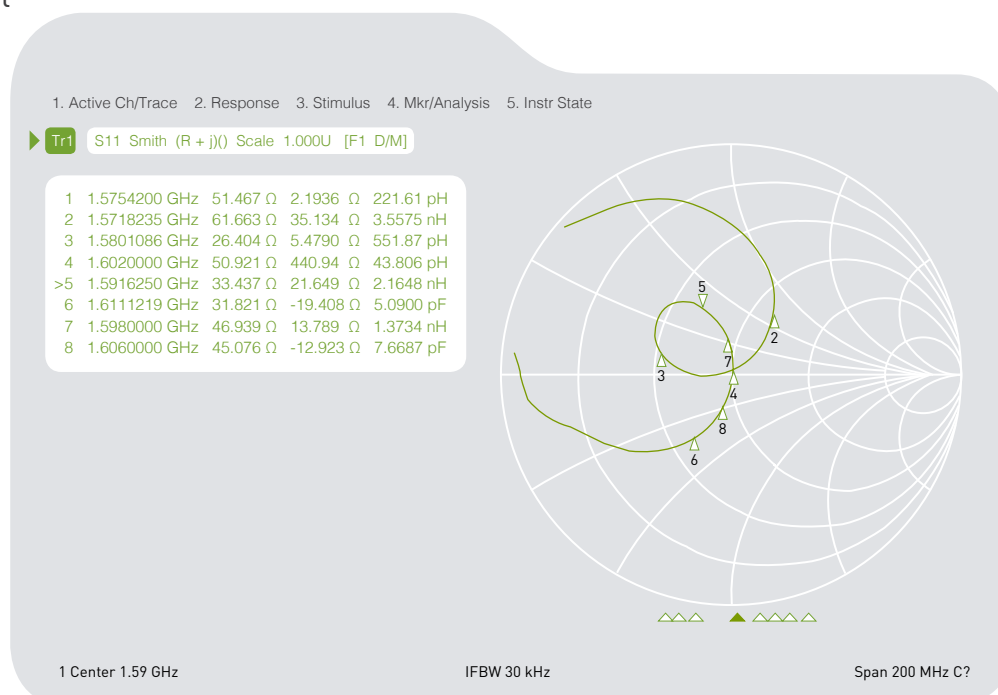


4. GPS-GLONASS Antenna Characteristics

4.1 Antenna Characteristics


Experiment Results

Dimension (mm)	Fo (MHz)	Return Loss (dB)	Impedance (Ω)	Gain 0° H-Plane (dBic)	Gain 0° E-Plane (dBic)
25.0 x 25.0 x 4.0mm	1575.42	-31.7	51.4 + j 2.1	-0.08	0.00
	1598	-16.8	46.9 + j 13.7	-3.86	-3.62
	1602	-39.8	50.9 + j 0.4	-4.17	-4.32
	1606	-16.8	45.0 - j 12.9	-4.74	-5.16

Antenna Radiation Pattern

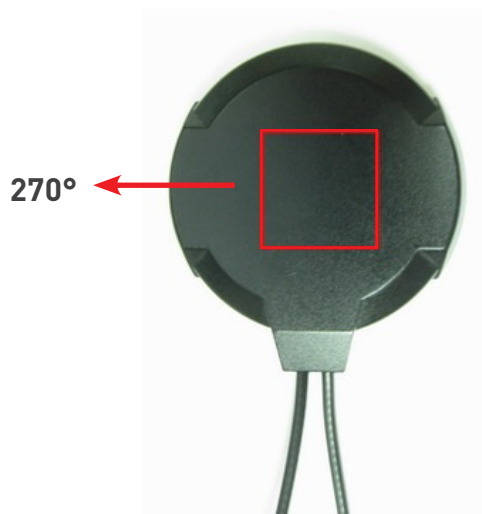



H-Plane

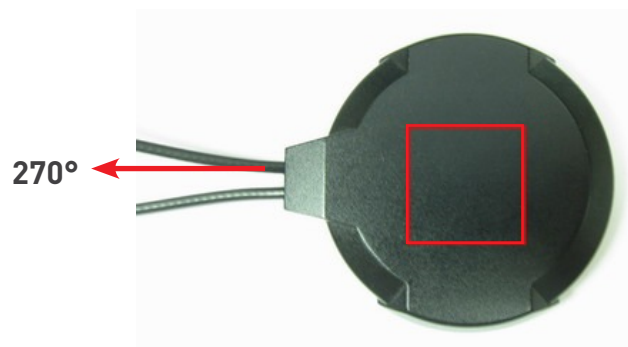

E-Plane

4. GPS-GLONASS Antenna Characteristics


4.1 Antenna Characteristics

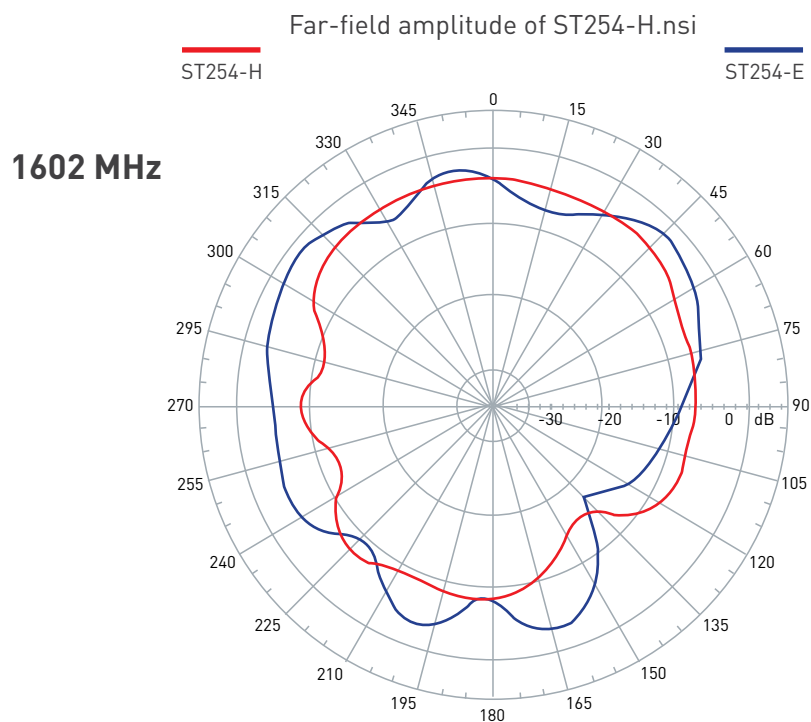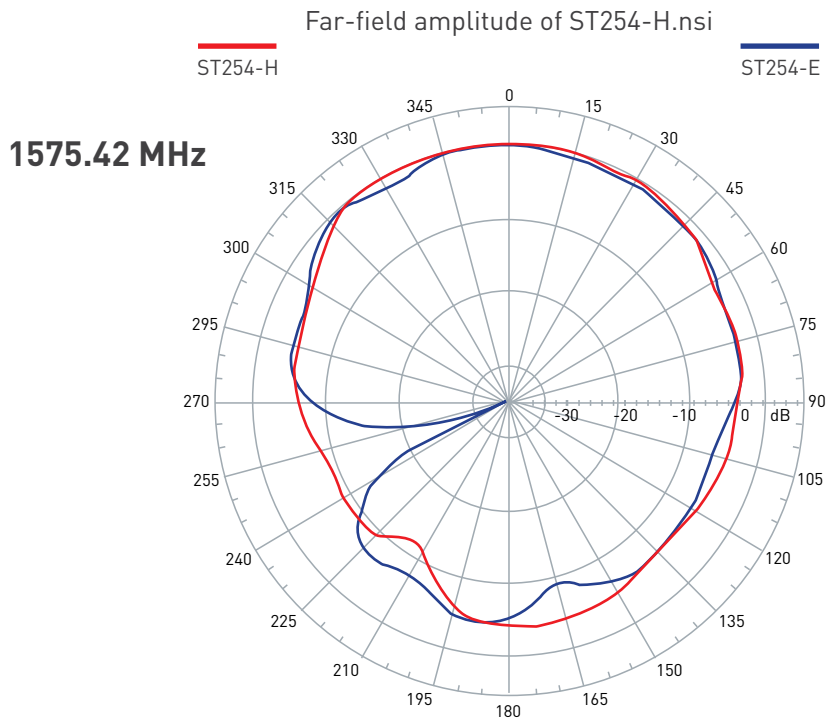


4. GPS-GLONASS Antenna Characteristics

4.2 LNA Characteristics

S11

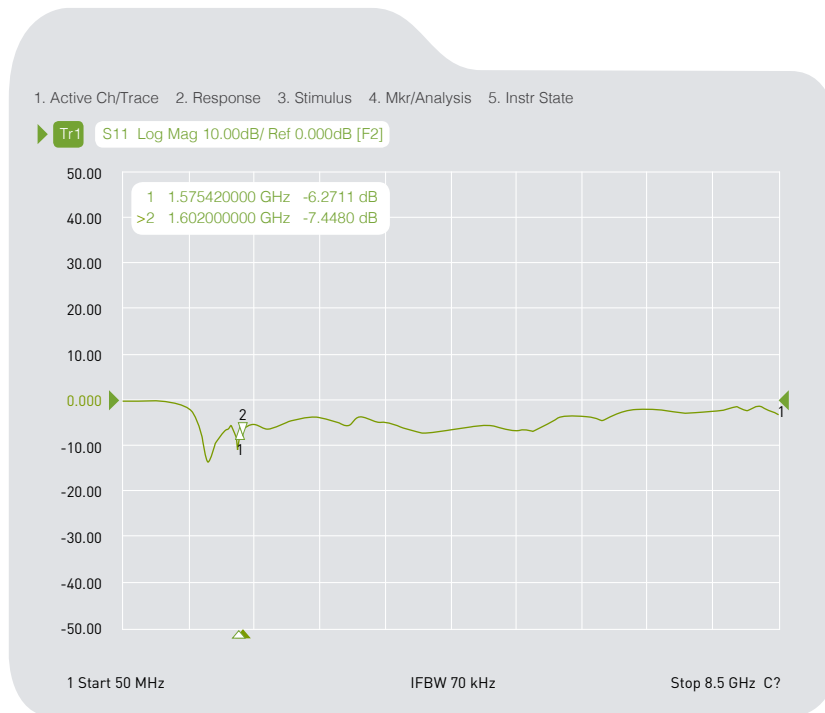


S12

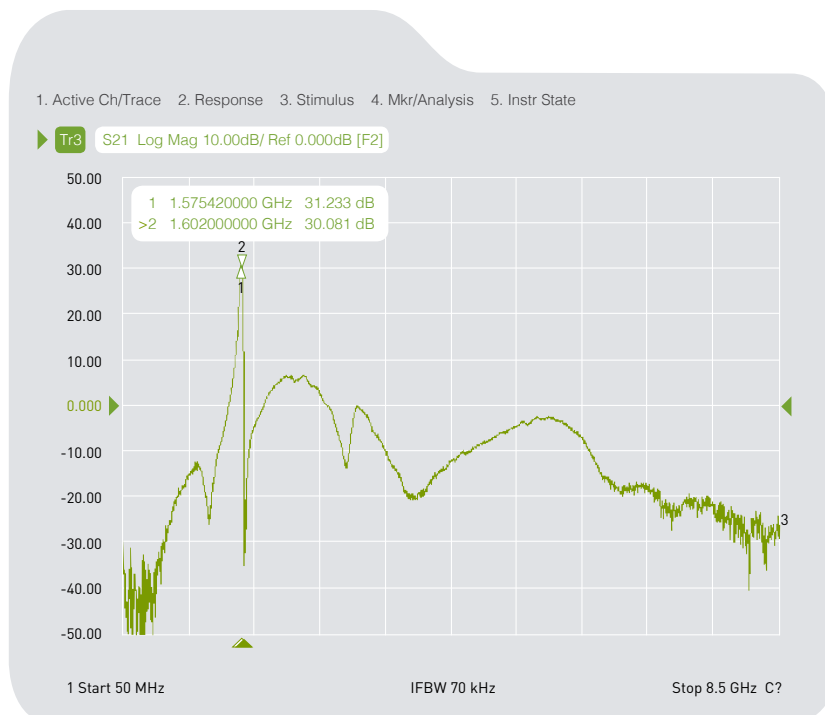

4. GPS-GLONASS Antenna Characteristics


4.2 LNA Characteristics

Noise Figure

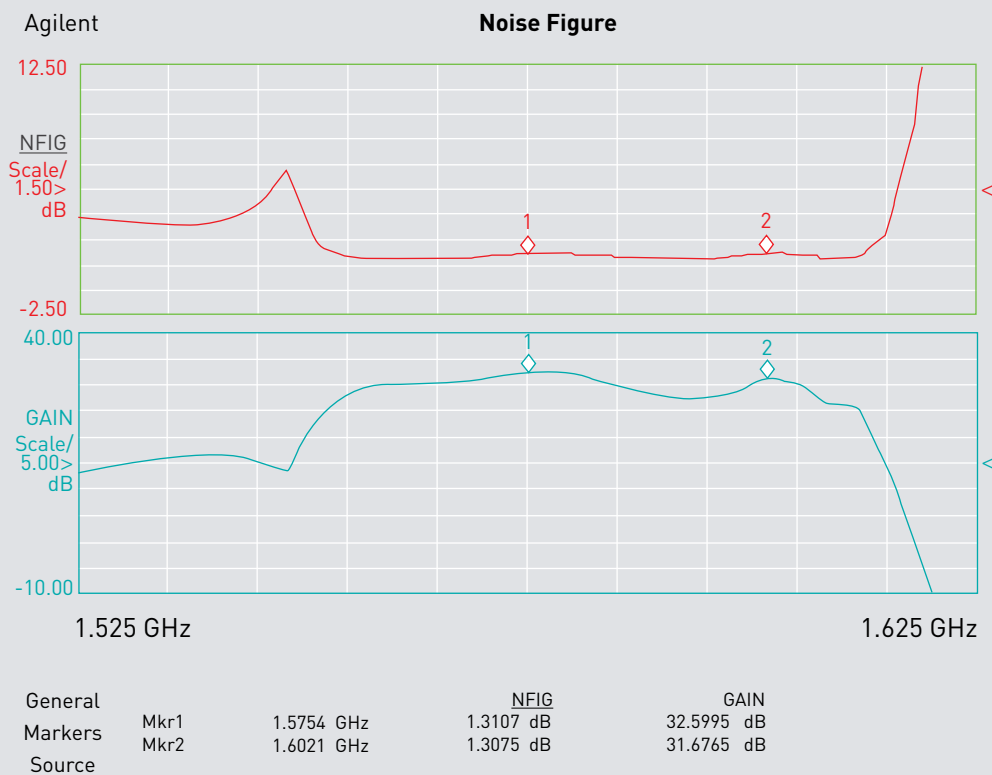


5. Drawing

Top View


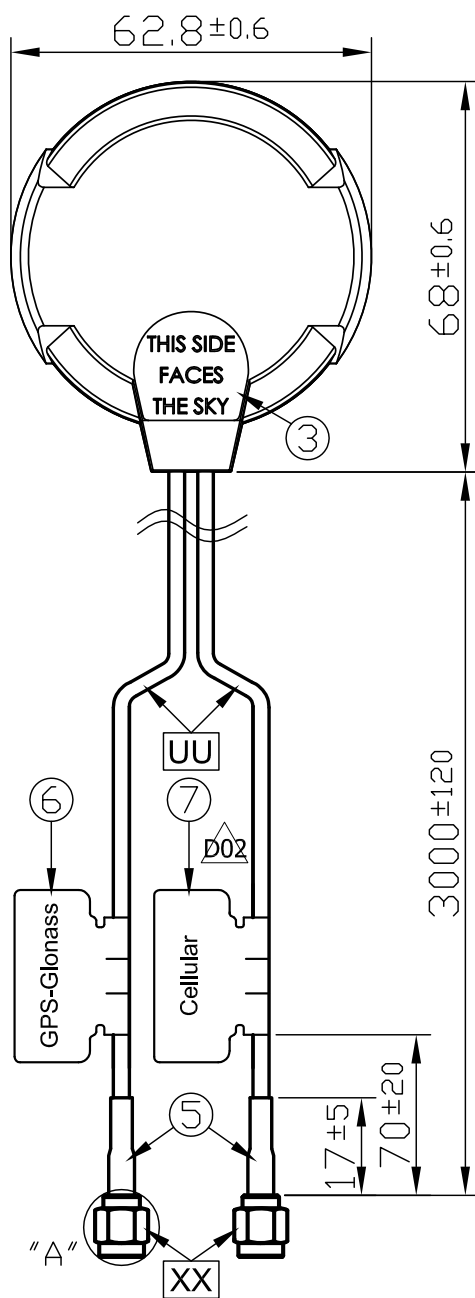


Side View

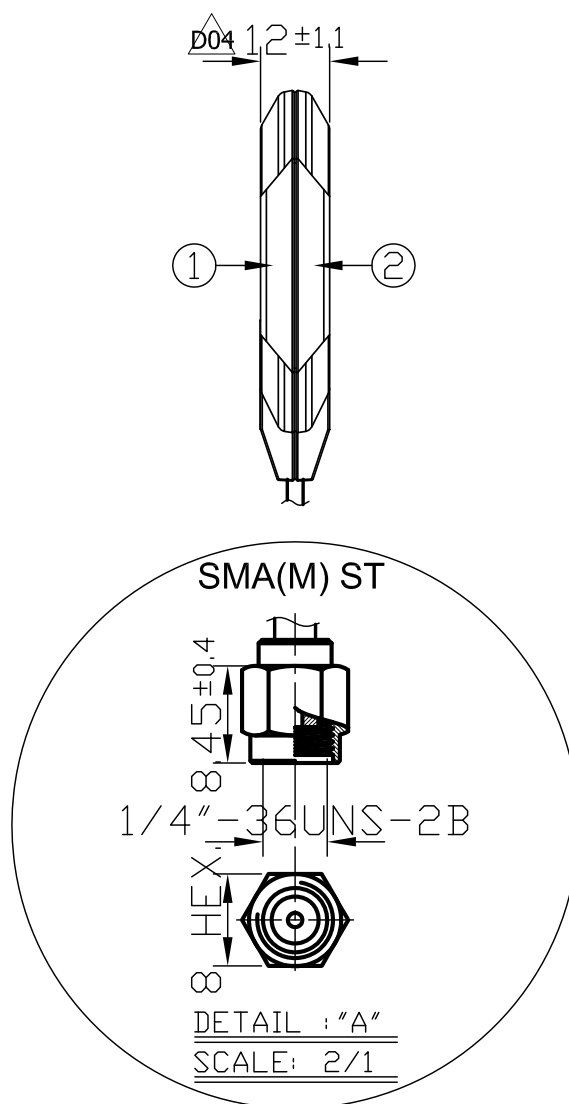

5. Drawing

Bottom View

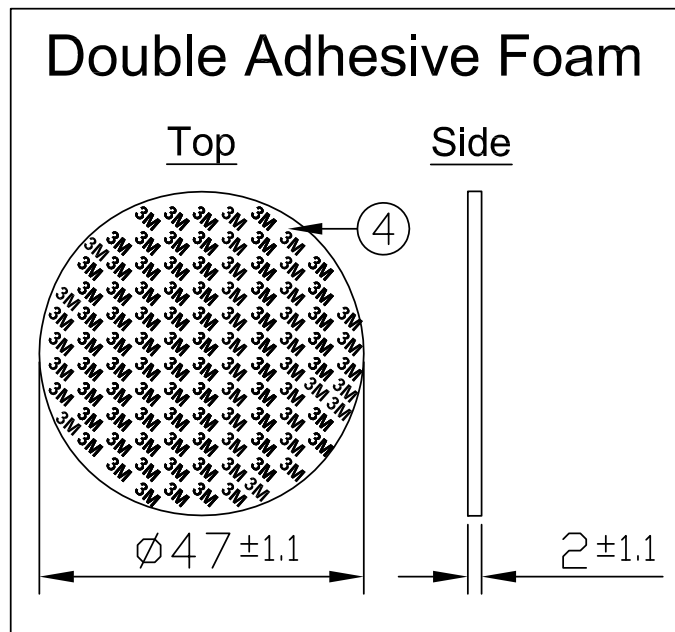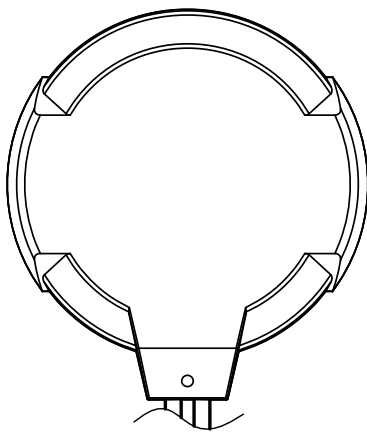

	Name
1	Housing Top
2	Housing Bottom
3	Clear Label
4	Double Adhesive Foam
5	Heat Shrink Tube RG-174
6	GPS-GLONASS Label
7	Celluar Label

	Material
	ABS
	ABS
	PET
	3M 9448 + CR - 4305
	PE
	Coated Paper
	Coated Paper

	Finish	QTY
	Black	1
	Black	1
	White	1
	Black	1
	Black	2
	Orange	1
	Blue	1


	Name
UU	Cable Type
XX	Connector Type

	Material
	RG-174
	SMA(M) ST

	Finish	QTY
	Black	2
	Gold	2

6. Packaging

1pcs antennas and 1 pcs double adhesive foam per small PE bag.

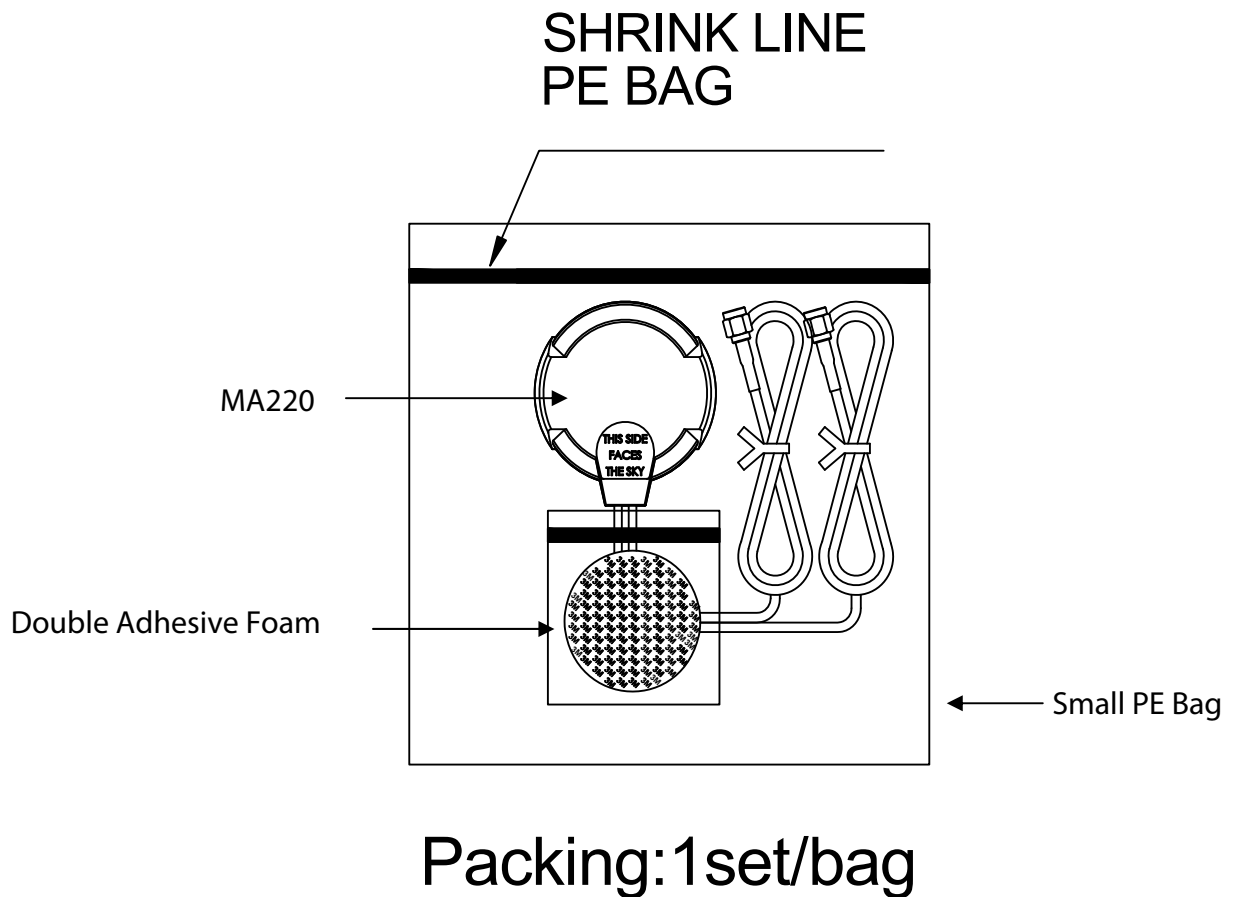

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and

product descriptions at any time without notice.

Taoglas reserves all rights to this document and the information

contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited. Copyright © Taoglas Ltd.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru