


**Force Guided Relay SR4 D/M**

- 4 pole relay with force guided contacts according to EN 50205
- Compact design & space efficient

Typical applications  
Emergency shut-off, press control, machine control, elevator and escalator control, safety relays



F0244-C





**Approvals**

VDE 40005334, UL E214025, TUV 968/EL 230, CQC 06017015578  
Technical data of approved types on request

**Contact Data**

|  |  |
|--|--|
| Contact arrangement  | 3 form A + 1 form B contacts<br>3 NO + 1 NC<br>2 form A + 2 form B contacts<br>2 NO + 2 NC |
| Rated voltage  | 250VAC   |
| Max. switching voltage                                     | 400VAC   |
| Rated current  | 8A   |
| Contact material   | AgSnO <sub>2</sub>   |
| Contact style  | single contact, force guided<br>type A according to EN 50205                               |
| Min. recommended contact load                              | 5V/10mA  |
| Initial contact resistance                                 | ≤100mΩ at 1A, 24VDC<br>≤20Ω at 10mA, 5VDC  |
| Frequency of operation, with/without load                  | 6/150min <sup>-1</sup>   |
| Contact ratings, IEC60947-5-1,<br>on 1 form A (NO) contact | AC15-3A<br>DC13-3A   |
| Mechanical endurance                                       | 10x10 <sup>6</sup> operations  |

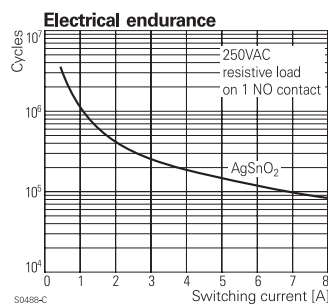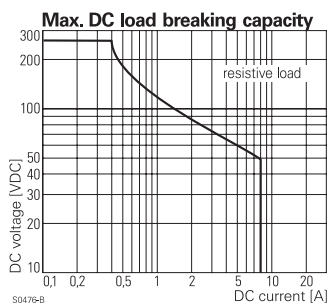

**Coil data**

Coil voltage range 5 to 110VDC

**Coil versions, DC-coil**


| Coil code | Rated voltage VDC | Operate voltage VDC | Release voltage VDC | Coil resistance Ω±10% | Rated coil power mW |
|-----------|-------------------|---------------------|---------------------|-----------------------|---------------------|
| 005       | 5                 | 3.8                 | 0.5                 | 31                    | 806                 |
| 006       | 6                 | 4.5                 | 0.6                 | 45                    | 800                 |
| 009       | 9                 | 6.8                 | 0.9                 | 101                   | 802                 |
| 012       | 12                | 9.0                 | 1.2                 | 180                   | 800                 |
| 015       | 15                | 11.3                | 1.5                 | 281                   | 801                 |
| 018       | 18                | 13.5                | 1.8                 | 405                   | 800                 |

**Coil Data (continued)**

**Coil versions, DC-coil**

| Coil code | Rated voltage VDC | Operate voltage VDC | Release voltage VDC | Coil resistance Ω±10% | Rated coil power mW |
|-----------|-------------------|---------------------|---------------------|-----------------------|---------------------|
| 021       | 21                | 16.0                | 2.1                 | 551                   | 800                 |
| 024       | 24                | 18.0                | 2.4                 | 720                   | 800                 |
| 036       | 36                | 27.0                | 3.6                 | 1620                  | 800                 |
| 040       | 40                | 30.0                | 4.0                 | 2000                  | 800                 |
| 048       | 48                | 36.0                | 4.8                 | 2880                  | 800                 |
| 060       | 60                | 45.0                | 6.0                 | 4500                  | 800                 |
| 085       | 85                | 63.8                | 8.5                 | 9031                  | 800                 |
| 110       | 110               | 83.0                | 11.0                | 15125                 | 800                 |

All figures are given for coil without pre-energization, at ambient temperature +23°C.

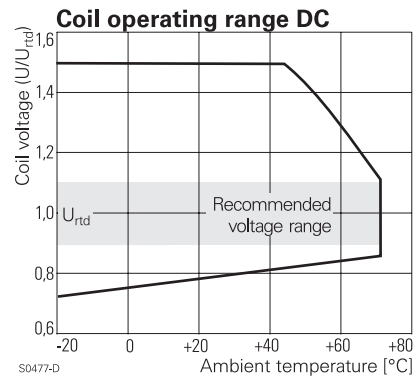

**Insulation Data**

|  |                    |
|--|--------------------|
| Initial dielectric strength                |                    |
| between open contacts                      | 1500Vrms           |
| between contact and coil                   | 4000Vrms           |
| between adjacent contacts                  | 2500Vrms           |
| Clearance/creepage                         |                    |
| between open contacts                      | microdisconnection |
| between contact and coil                   | ≥10/10mm           |
| between adjacent contacts                  | ≥3/3.5mm           |
| Insulation to EN 50178, type of insulation |                    |
| between contact and coil                   | reinforced         |
| between adjacent contacts                  | basic              |

**Force Guided Relay SR4 D/M** (Continued)


**Other Data**

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at [www.te.com/customersupport/rohssupportcenter](http://www.te.com/customersupport/rohssupportcenter)

|                                      |              |
|--------------------------------------|--------------|
| Ambient temperature                  | -25 to 70°C  |
| Category of environmental Protection | RTIII        |
| IEC 61 810                           | RTIII        |
| Weight                               | 30g          |
| Resistance to soldering heat THT     | 260°C/5s     |
| IEC 60068-2-20                       | 260°C/5s     |
| Packaging/unit                       | tube/10 pcs. |


**PCB layout / terminal assignment**

Bottom view on solder pins

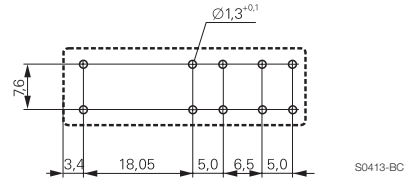


For more detailed information see product specification 2158002


2 form A + 2 form B, 2 NO + 2 NC contacts

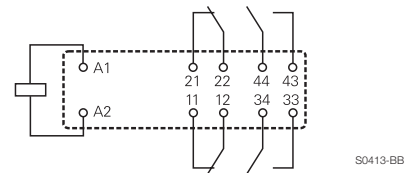

**Dimensions**

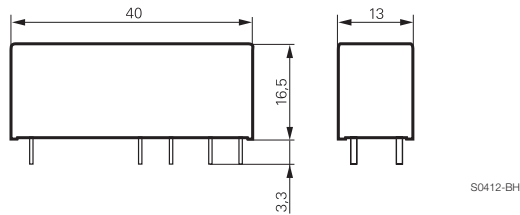

3 form A + 1 form B, 3 NO + 1 NC contacts

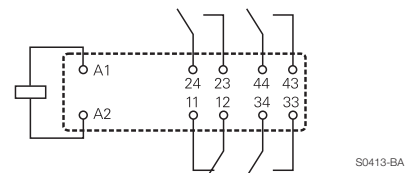

**Product code structure**

Typical product code **SR4 D 4 012**

|                            |  |
|----------------------------|--|
| <b>Type</b>                | <b>SR4</b> Relay with force guided contacts SR4  |
| <b>Contact arrangement</b> | <b>D</b> 2 form A + 2 form B contacts (2 NO + 2 NC)<br><b>M</b> 3 form A + 1 form B contacts (3 NO + 1 NC) |
| <b>Contact material</b>    | <b>4</b> AgSnO <sub>2</sub>  |
| <b>Coil</b>                | Coil code: please refer to coil versions table (e.g. 012=12VDC)<br>Other types on request                  |

**Force Guided Relay SR4 D/M** (Continued)

| Product code | Type  | Contact arrangement                             | Contact material   | Coil  | Part number                                     |                    |       |             |
|--------------|---|---|--------------------|---|---|--------------------|-------|-------------|
| SR4D4005     | 4 pole<br>relay with<br>force guided contacts | 2 form A + 2 form B,<br>2 NO + 2 NC<br>contacts | AgSnO <sub>2</sub> | 5VDC  | 7-1415054-1                                     |                    |       |             |
| SR4D4006     |   |   |                    | 6VDC  | 8-1415054-1                                     |                    |       |             |
| SR4D4009     |   |   |                    | 9VDC  | 9-1415054-1                                     |                    |       |             |
| SR4D4012     |   |   |                    | 12VDC   | 1415055-1                                       |                    |       |             |
| SR4D4018     |   |   |                    | 18VDC   | 1-1415055-1                                     |                    |       |             |
| SR4D4021     |   |   |                    | 21VDC   | 2-1415055-1                                     |                    |       |             |
| SR4D4024     |   |   |                    | 24VDC   | 3-1415055-1                                     |                    |       |             |
| SR4D4036     |   |   |                    | 36VDC   | 4-1415055-1                                     |                    |       |             |
| SR4D4040     |   |   |                    | 40VDC   | 5-1415055-1                                     |                    |       |             |
| SR4D4048     |   |   |                    | 48VDC   | 6-1415055-1                                     |                    |       |             |
| SR4D4060     |   |   |                    | 60VDC   | 7-1415055-1                                     |                    |       |             |
| SR4D4085     |   |   |                    | 85VDC   | 8-1415055-1                                     |                    |       |             |
| SR4D4110     |   |   |                    | 110VDC  | 9-1415055-1                                     |                    |       |             |
| SR4M4005     |   |   |                    | 3 form A + 1 form B,<br>3 NO + 1 NC<br>contacts | 3 form A + 1 form B,<br>3 NO + 1 NC<br>contacts | AgSnO <sub>2</sub> | 5VDC  | 5-1415053-1 |
| SR4M4006     |   |   |                    |   |   |                    | 6VDC  | 6-1415053-1 |
| SR4M4009     |   |   |                    |   |   |                    | 9VDC  | 7-1415053-1 |
| SR4M4012     |   |   |                    |   |   |                    | 12VDC | 8-1415053-1 |
| SR4M4018     | 18VDC   | 9-1415053-1                                     |                    |   |   |                    |       |             |
| SR4M4021     | 21VDC   | 1415054-1                                       |                    |   |   |                    |       |             |
| SR4M4024     | 24VDC   | 4-1415053-1                                     |                    |   |   |                    |       |             |
| SR4M4036     | 36VDC   | 1-1415054-1                                     |                    |   |   |                    |       |             |
| SR4M4040     | 40VDC   | 2-1415054-1                                     |                    |   |   |                    |       |             |
| SR4M4048     | 48VDC   | 3-1415054-1                                     |                    |   |   |                    |       |             |
| SR4M4060     | 60VDC   | 4-1415054-1                                     |                    |   |   |                    |       |             |
| SR4M4085     | 85VDC   | 5-1415054-1                                     |                    |   |   |                    |       |             |
| SR4M4110     | 110VDC  | 6-1415054-1                                     |                    |   |   |                    |       |             |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)