

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0008500136

Status:

Active

Overview:

kk

Description:

KK® Cat Ear Crimp Terminal 4809, 22-30 AWG, Tin, Bag

Documents:

Drawing (PDF)

Product Specification PS-99020-0088 (PDF)

Product Specification PS-10-07 (PDF)

RoHS Certificate of Compliance (PDF)

General

Product Family

Crimp Terminals

Series

4809

Crimp Quality Equipment

Yes

Overview

kk

Product Name

Cat Ear, KK®

Physical

Gender

Female

Material - Metal

Brass

Material - Plating Mating

Tin

Packaging Type

Bag

Termination Interface: Style

Crimp or Compression

Wire Insulation Diameter

1.57mm (.062") max.

Wire Size AWG

22, 24, 26, 28, 30

Wire Size mm²

N/A

Material Info

Old Part Number

4809-(P914)L

Reference - Drawing Numbers

Product Specification

PS-10-07, PS-99020-0088

Sales Drawing

SD-4809-*



Series
image - Reference only

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

4809Series

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

Hand Crimp Tool


0638118200

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION


NOTES*

1. MATERIAL: (0.2)/.008 THICK BRASS 70/30, FOR MATL. SPEC SEE SHEET 2.
2. SUITABLE FOR 22-30 GA WIRE, (1.57)/.062 MAX INSULATION.
3. CODE LETTER PRECEDING PART No DESIGNATES MANUFG. LOCATION, I=IRELAND.
4. TERMINAL MUST MEET BEND SPEC. SDES-219.
5. THIS PART CONFORMS TO PROD. SPEC. 99020-0088


SECTION D-D
(4809-1T ONLY)

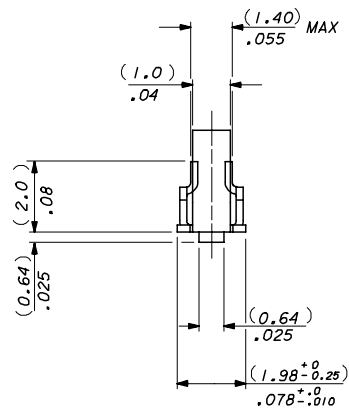



SECTION B-B



SECTION A-A



SELECTIVE PLATING AREA,
SEE CHART AND SDES-186

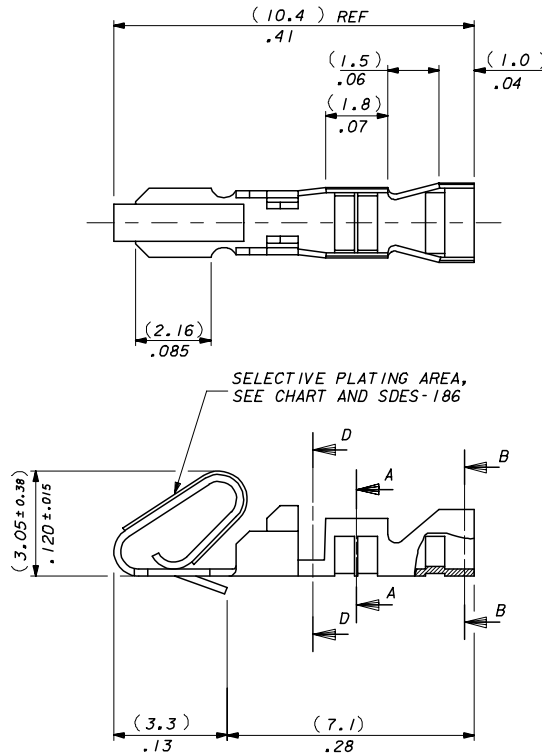

CARRIER STRIP DETAIL
SCALE 2:1

4809-(*)**
BLANK : DIM. A = (2.45-1.75) / .096-.069
M: DIM A = (2.35-2.05) / .093-.081
BLANK-CHAIN FORM TOP
FEEDING REEL
L-LOOSE FORM
BF-CHAIN FORM, BOTTOM
FEEDING REEL

DIM CORRECTION EC NO: E2007-0218 DRWN: JDENNEHY 2006/09/15 CHKD: DMOR IARTY 2006/09/15 APPR: JDENNEHY 2006/10/11	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY YCC	DATE 1986/07/30	TITLE ANTI-FISH HOOKING TERMINAL KK,(2.50)/.100		
			4 PLACES	± ---	± ---	CHECKED BY DMOR IARTY	DATE 2004/10/18	MOLEX INCORPORATED		
			3 PLACES	± ---	± .010					
			2 PLACES	± 0.25	± .014					
		1 PLACE	± 0.35	± ---	APPROVED BY JDENNEHY	DATE 2004/10/19				
			ANGULAR ± ---°		MATERIAL NO.		DOCUMENT NO.	SHEET NO.		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-4809-*		1 OF 2	
AL	REV				SIZE A2	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

13 12 11 10 9 8 7 6 5 4 3 2 1

FINISH NOTES*

(P902) HOT TIN DIP 1.0- 2.5UM/(.000040 - .000100)

(999) UNPLATED

(109) ELECTRO TIN PLATE (7.6-10UM)/.000300-.000400 OVER (1.25-2.0UM)/.000050-.000080 COPPER.

(505) GOLD PLATE (1.25-1.5UM)/.000050-.000060 OVER (1.25-2.0UM)/.000050-.000080 NICKEL.

(506) GOLD PLATE (1.25-1.5UM)/.000050-.000060 OVER (2.5-3.25UM)/.000100-.000130 NICKEL.


(507) GOLD PLATE (2.5-2.75UM)/.000100-.000110 OVER (1.25-2.0UM)/.000050-.000080 NICKEL.

(509) GOLD PLATE (1.25-1.5UM)/.000050-.000060 OVER (0.76-2.0UM)/.000030-.000080 NICKEL.


(550) GOLD PLATE (0.38-0.63UM)/.000015-.000025 OVER (0.76-1.5UM)/.000030-.000060 NICKEL
IN CONTACT AREA WITH (0.12UM)/.000005 MIN. GOLD FLASH OVERALL.

(555) SELECTIVE GOLD (0.38UM)/.000015 OVER (0.76UM)/.000030 IN CONTACT AREA ONLY.

(558) GOLD PLATE (0.76-1.5UM)/.000030-.000060 OVER (1.25-2.0UM)/.000050-.000080 NICKEL
IN CONTACT AREA WITH (0.12UM)/.000005 MIN. GOLD FLASH OVERALL.

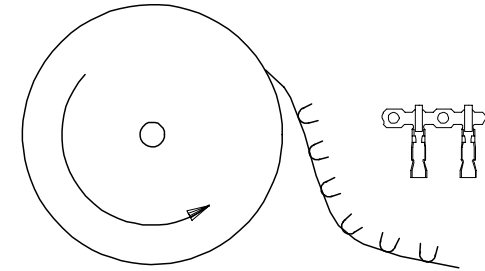

TERMINALS FEEDING FROM THE TOP
OF THE REEL ARE STANDARD WOUND

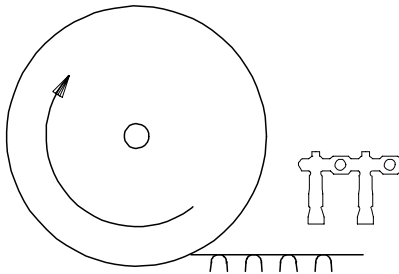

TERMINALS FEEDING FROM THE BOTTOM
OF THE REEL ARE REVERSE WOUND
SEE NOTE 5

I	08-50-0022	4809-(109)BF	CHAIN	(109)	(2.1)/.083 REF
I	40-01-0831	↑ -(999)BF	↑	(999)	(2.1)/.083 REF
	NT	-(505)BF	↑	(505)	(2.1)/.083 REF
	NT	-(507)BF	↑	(507)	(2.1)/.083 REF
I	08-55-0119	↓ -(555)BF	↓	(555)	(2.1)/.083 REF
I	08-56-0155	↓ -(550)BF	↓	(550)	(2.1)/.083 REF
I	08-50-0021	4809-(P902)BF	CHAIN	(P902)	(2.1)/.083 REF
	PART No	ENG No	FORM	FINISH	DIM . A
BOTTOM FEEDING REELS ONLY					

	NT	4809-(506)	CHAIN	(506)	ES-99001-0014	(2.1)/.083 REF
	NT	↑ -(506)JL	LOOSE	(506)		
I	08-56-0158	-(558)	CHAIN	(558)		(2.1)/.083 REF
	NT	-(558)JL	LOOSE	(558)		
	NT	-(509)	CHAIN	(509)		(2.1)/.083 REF
	NT	-(509)JL	LOOSE	(509)		
	NT	-(109)	CHAIN	(109)		(2.1)/.083 REF
	NT	-(109)JL	LOOSE	(109)		
I	40-01-0829	-(999)	CHAIN	(999)		(2.1)/.083 REF
I	40-01-0830	-(999)JL	LOOSE	(999)		
	NT	-(505)	CHAIN	(505)		(2.1)/.083 REF
	NT	-(505)JL	LOOSE	(505)		
	NT	-(507)	CHAIN	(507)		(2.1)/.083 REF
	NT	-(507)JL	LOOSE	(507)		
I	08-55-0110	-(555)	CHAIN	(555)		(2.1)/.083 REF
I	08-55-0111	-(555)JL	LOOSE	(555)		
	08-56-0120	-(550)	CHAIN	(550)	ES-99001-0014	(2.1)/.083 REF
	08-56-0115	-(550)JL	LOOSE	(550)		
I	08-50-0135	↓ -(P902)	CHAIN	(P914)	ES-99001-0015	(2.1)/.083 REF
I	08-50-0136	4809-(P902)JL	LOOSE	(P914)		
	PART No	ENG No	FORM	FINISH	MATL. SPEC.	DIM . A
TOP FEEDING REELS ONLY						

ADDED PART OPTION EC NO: E2005-0286 DRAWN: GMSWEN 2004/11/03 CHKD: DMOR IART 2004/11/03 APPR: JDEWNEY 2004/11/04	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
					DRAWN BY MCC		DATE 1986/07/30		ANTI-FISH HOOKING TERMINAL KK,(2.50)/.100		
					CHECKED BY DMOR IART		DATE 2004/10/18				
							APPROVED BY JDEWNEY		DATE 2004/10/19		MOLEX INCORPORATED
				MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-4809-*		2 OF 2	
				SIZE A2		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

12 11 10 9 8 7 6 5 4 3 2 1

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru