

SD71175

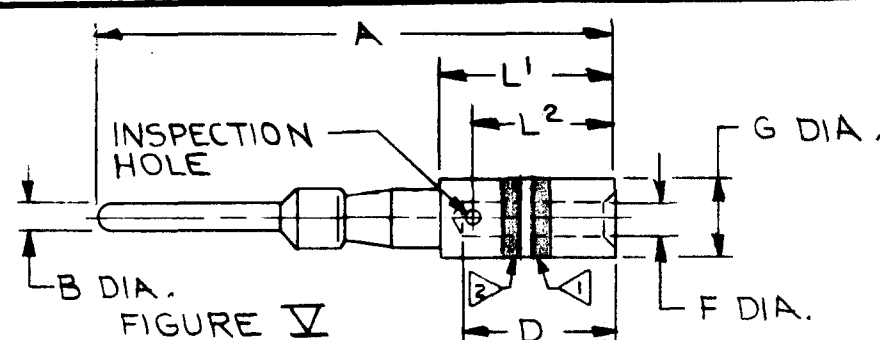


FIGURE V

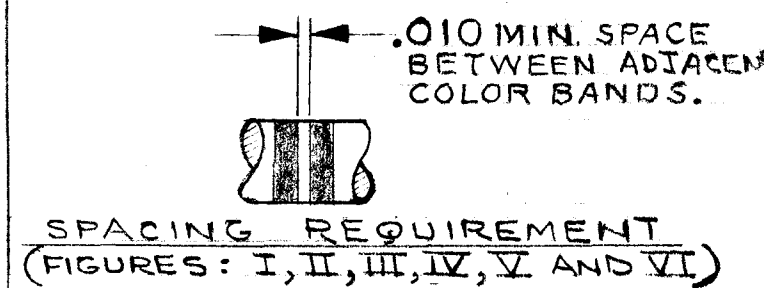
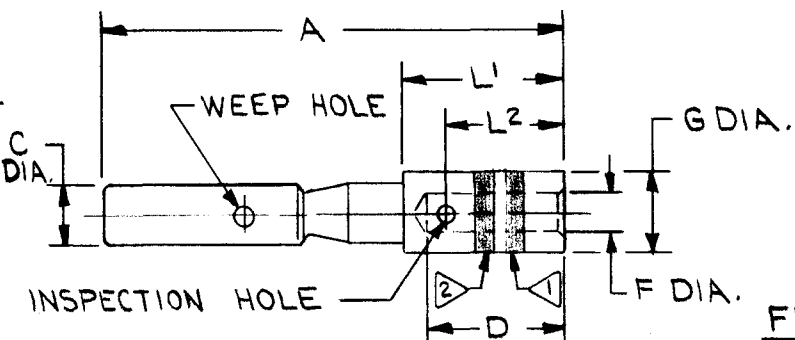
SPACING REQUIREMENT
(FIGURES: I, II, III, IV, V AND VI)

FIGURE VI

REV.	DATE	REVISION DESCRIPTION	BY	C'D.
1	12-24-76	SEE REV. REF. PRINT SHEET 2 (ECB1291)	RWD.	RWD.
2	2-8-71	SEE REV. REF. PRINT SHS 142 (ECB1341)	PJR	RWD.
3	2-22-71	SHEET 1, BLACK STRIP ADDED TO FIG. I - III (ECB1357)	PJB	RWD.
4	4-26-71	SEE REV. REF. PRINT SH. 1 (ECB1399)	RWD.	RWD.
5	9-20-71	SEE REV. REF. PRINT SH. 1 (ECB1496)	P.G.P.	RWD.
6	30-MAY-72	SEE REV. REF. PRINT (ECB1695)	POP	RWD.
7	7-17-72	PLATING TABLE REMOVED (ECB1703)	RWD.	RWD.
REVISIONS CONTINUED ON SHEET 2				

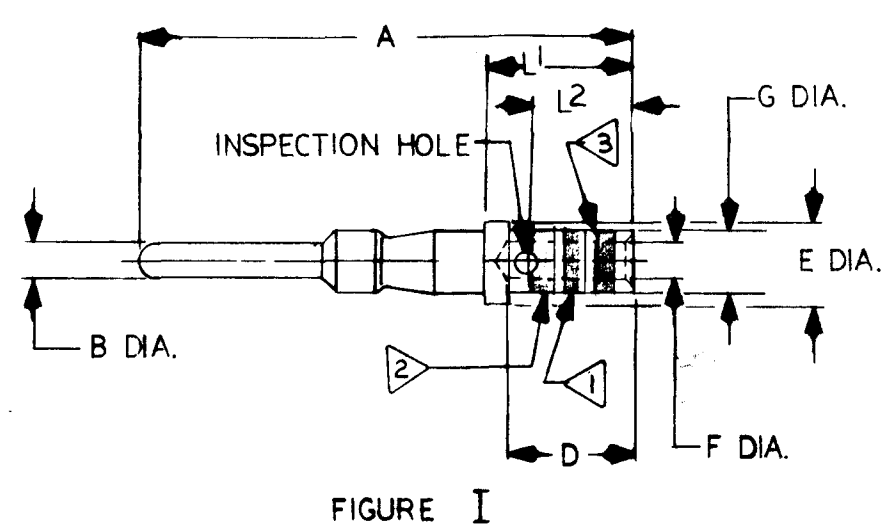


FIGURE I

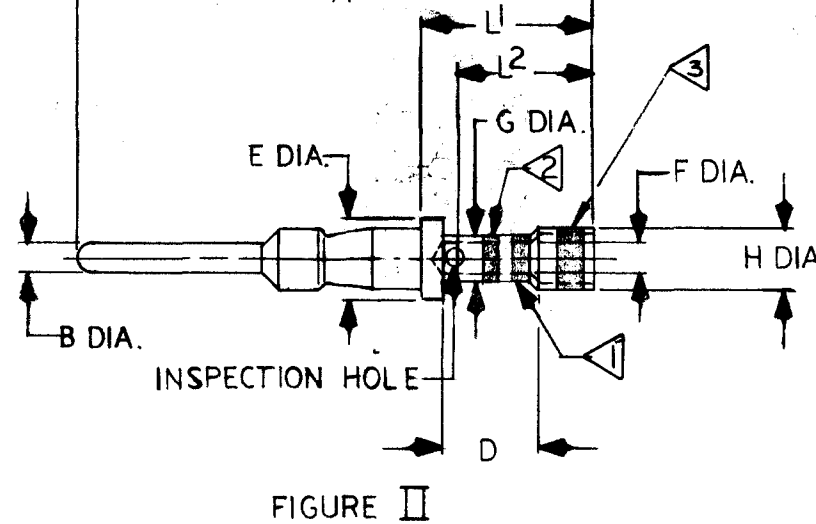


FIGURE II

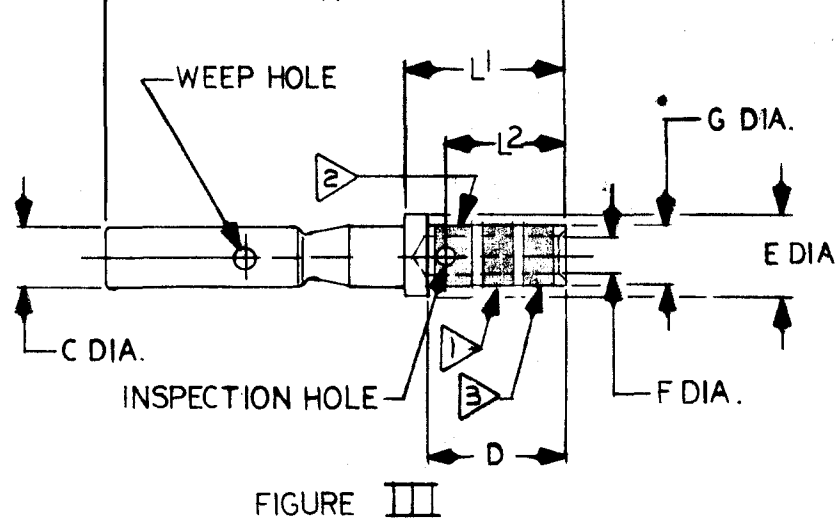


FIGURE III

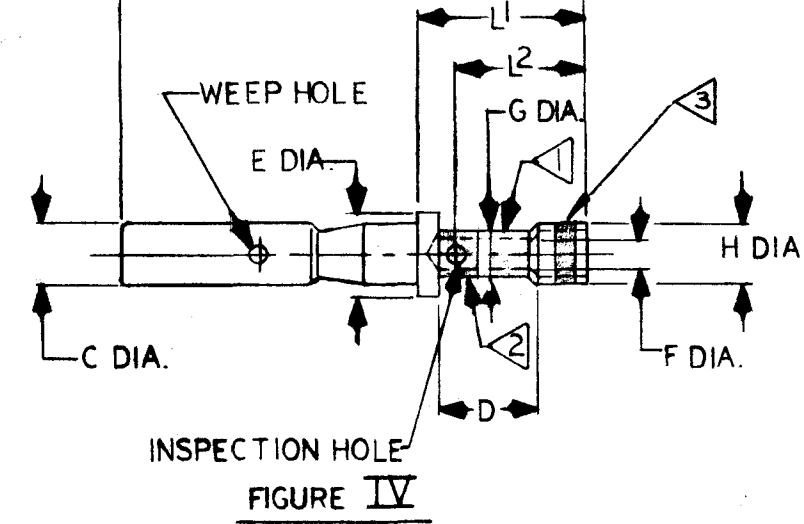


FIGURE IV

DOUGLAS CONTACT CATALOG NO.	PIN OR SOCKET	MATING END		WIRE BARREL				TOOLING					FIG.	FIG.								WEIGHT LBS./M.	BURNDY CATALOG NUMBER	L1 ±.002	L2 ±.005		
		SIZE	COLOR CODE	SIZE	COLOR CODE	ACCOMMODATES				CRIMP TOOL	DIE SET	STOP BUSHING		INSERTION TOOL	EXTRACTION TOOL	A ±.010	B DIA. ±.001	C DIA.	D STRIP LENGTH	E DIA.	F DIA.					G DIA.	H DIA. ±.001
						CONDUCTOR		INSULATION																			
						MIN.	MAX.	MIN. DIA.	MAX. DIA.																		
LRM12Z-5DE5	P	12	YELLOW	12	YELLOW	(#14)	(#12)	.112	.146	S-8	SL-4	RTM12-5	RX12-7	I	.905	.094	—	9/32	202/198	102/99	153/147	—	3.4	LRM12Z-5DE5	.296	.220	
LRC12Z-5DE5	S	12	YELLOW	12	YELLOW	(#14)	(#12)	.112	.146	S-8	SL-4	RTM12-5	RX12-7	III	.844	—	161/158	9/32	202/198	102/99	153/147	—	3.5	LRC12Z-5DE5	.296	.220	
LRM16M-5DE5	P	16	BLUE	16	BLUE	(#20)	(#16)	.074	.110	S-7	SL-2	RTM16-2V2	RX16-7V1	I	.905	.0625	—	9/32	148/144	068/066	105/101	—	1.6	LRM16M-5DE5	.296	.220	
LRC16M-5DE5	S	16	BLUE	16	BLUE	(#20)	(#16)	.074	.110	S-7	SL-2	RTM16-2V2	RX16-7V1	III	.844	—	113/110	9/32	148/144	068/066	105/101	—	1.7	LRC16M-5DE5	.296	.220	
LRM16M-6DE5	P	16	BLUE	16	BLUE	(#20)	(#16)	.074	.110	S-7	SL-2	RTM16-2V2	RX16-8	I	1.093	.0625	—	9/32	148/144	068/066	105/101	—	2.1	LRM16M-6DE5	.296	.220	
LRC16M-6DE5	S	16	BLUE	16	BLUE	(#20)	(#16)	.074	.110	S-7	SL-2	RTM16-2V2	RX16-8	III	1.091	—	113/110	9/32	148/144	068/066	105/101	—	2.2	LRC16M-6DE5	.296	.220	
LRM16W-2DE5	P	20	RED	16	BLUE	(#20)	(#16)	.090	.130	S-7	SL-44	RTM16-2	RX20-24V3	V	.905	.040	—	9/32	—	068/066	105/101	—	.9	LRM16W-2DE5	.296	.220	
LRC16W-2DE5	S	20	RED	16	BLUE	(#20)	(#16)	.090	.130	S-7	SL-44	RTM16-2	RX20-24V3	VI	.844	—	078/076	9/32	—	068/066	105/101	—	1.0	LRC16W-2DE5	.296	.220	
LRM20M-1DE5	P	16	BLUE	20	RED	(#24)	(#20)	.039	.080	S-6A	SL-64	RTM20-5 OR RTM20-14	RX16-8	II	.915	.0625	—	7/32	148/144	050/048	078/076	.105	1.5	LRM20M-1DE5	.306	.246	
LRC20M-1DE5	S	16	BLUE	20	RED	(#24)	(#20)	.039	.080	S-6A	SL-64	RTM20-5 OR RTM20-14	RX16-8	IV	.854	—	113/110	7/32	148/144	050/048	078/076	.105	1.6	LRC20M-1DE5	.306	.246	
LRM20M-2DE5	P	16	BLUE	20	RED	(#24)	(#20)	.039	.080	S-6A	SL-64	RTM20-5 OR RTM20-14	RX16-8	II	1.103	.0625	—	7/32	148/144	050/048	078/076	.105	2.0	LRM20M-2DE5	.306	.246	
LRC20M-2DE5	S	16	BLUE	20	RED	(#24)	(#20)	.039	.080	S-6A	SL-64	RTM20-5 OR RTM20-14	RX16-8	IV	1.101	—	113/110	7/32	148/144	050/048	078/076	.105	2.1	LRC20M-2DE5	.306	.246	
LRM20W-5DE5	P	20	RED	20	RED	(#24)	(#20)	.090	.130	S-6A	SL-3A	RTM20-5 OR RTM20-14	RX20-24V3	II	.915	.040	—	7/32	103/100	050/048	078/076	.105	.8	LRM20W-5DE5	.306	.246	
LRC20W-5DE5	S	20	RED	20	RED	(#24)	(#20)	.090	.130	S-6A	SL-3A	RTM20-5 OR RTM20-14	RX20-24V3	IV	.854	—	078/076	7/32	103/100	050/048	078/076	.105	.9	LRC20W-5DE5	.306	.246	
LRM22M-1DE5	P	16	BLUE	22	GREEN	(#24)	(#22)	.080	.120	S-6A	SL-64	RTM16-2	RX16-7	II	.915	.0625	—	7/32	148/144	038/036	066/064	.105	1.7	LRM22M-1DE5	.306	.246	
LRC22M-1DE5	S	16	BLUE	22	GREEN	(#24)	(#22)	.080	.120	S-6A	SL-64	RTM16-2	RX16-7	IV	.854	—	113/110	7/32	148/144	038/036	066/064	.105	1.8	LRC22M-1DE5	.306	.246	
LRM22M-2DE5	P	16	BLUE	22	GREEN	(#24)	(#22)	.080	.120	S-6A	SL-64	RTM16-2	RX16-8	II	1.103	.0625	—	7/32	148/144	038/036	066/064	.105	1.8	LRM22M-2DE5	.306	.246	
LRC22M-2DE5	S	16	BLUE	22	GREEN	(#24)	(#22)	.080	.120	S-6A	SL-64	RTM16-2	RX16-8	IV	1.101	—	113/110	7/32	148/144	038/036	066/064	.105	2.2	LRC22M-2DE5	.306	.246	

NOTES:

▲▲▲ DENOTES WIRE BARREL.
▲ DENOTES MATING END.
BLACK DENOTES 5015
TYPE CONTACT AND IS ONLY
APPLICABLE IF 3 APPEARS TO
LEFT OF CATALOG NUMBER.

▲ TO ORDER REEL MOUNTED CONTACTS, PRECEDE CONTACT
CATALOG NO. WITH "C" - EXAMPLE - CLRC16M-5DE5
INDICATES LRC16M-5DE5 CONTACTS MOUNTED IN REELED
CARRY STRIP FOR BANDOMATIC ASSEMBLY.
REF. ASTM B33-63 AIRCRAFT WIRE ONLY.

▲ FOR NEW CONTACTS REPLACING SUPERSEDED
CONTACTS SEE DWG. SDW1119

IDENTIFICATION STRIPES
IN ACCORDANCE WITH:
MIL-C-23216
MS 3190
MS 3192C
MS 3193B

MATERIAL: BRASS

PLATING TABLE	
SUFFIX	PLATING
DE5	GOLD OVER COPPER

FSCM NO. 09922

BANTAM PIN AND SOCKET CONTACTS	
CAT. NO. LRM/LRC	(TABLE)
DRAWN RJR2	CHECKED 11-13-70 C.B.
10-29-70	DES. APPROV.
	PROD. APPROV.
BURNEDY NORWALK, CONN. 06852	
DRAWING NO. SD71175	
SHEET 1 OF 2	

SD7117S

REV.	DATE	REVISION DESCRIPTION	BY	C.K.D.
12	11-21-83	SHT. 1, NOTE 3, ADDED. AND IS ONLY APPLICABLE IF IT APPEARS TO LEFT OF CAT. NO. (DC11095)	DA	C.B.
13	3/24/79	REMOVED BR FROM DRAWING # MATERIAL: BRASS PER ECN 4328	DAF	SAF

REV.	DATE	REVISION DESCRIPTION	BY	C.K.D.
REVISIONS CONTINUED FROM SHEET 1				
8	3-23-74	SHEET 2, NOTE 'A' WAS NOTE '4' NOTE 'B' ADDED. (ECB1968 & ADD.)	D.L.	P.J.B.
9	4-29-81	SHTS. 1 & 2, SEE REV. REF. (ECC4269) PRINT.	L.H.	SFP
10	9-15-81	SHTS. 1 & 2 SEE REV. REF. (DC10,666) PRINTS	L.H.	SFP
11	9/9/83	ADDED NOTE 6, SUPERSEDED CAT. NO'S. LRM12Z23DES, LRC12Z23DES, LRM16M23DES, LRC16M23DES, LRM20W23DES, LRC20W23DES PER ECW1395	S.E.	CEB

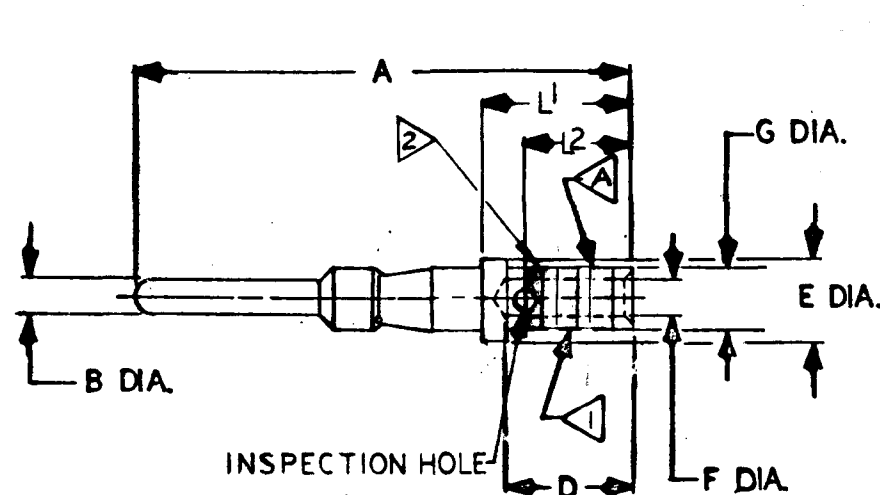


FIGURE I

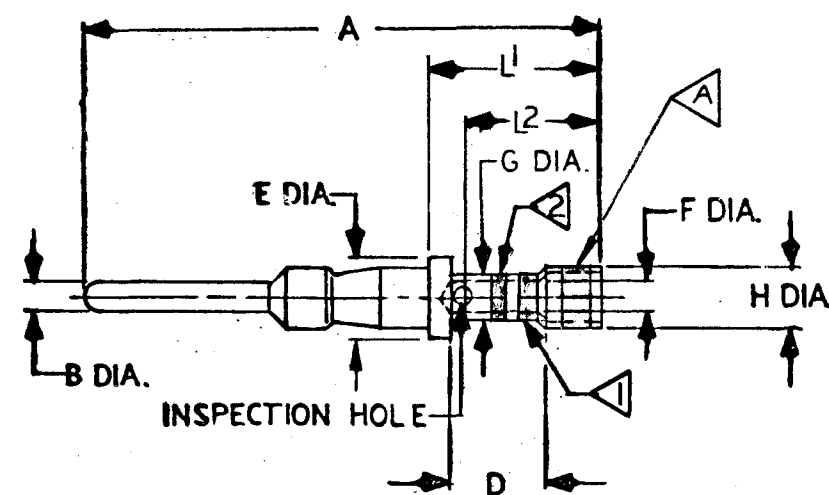


FIGURE II

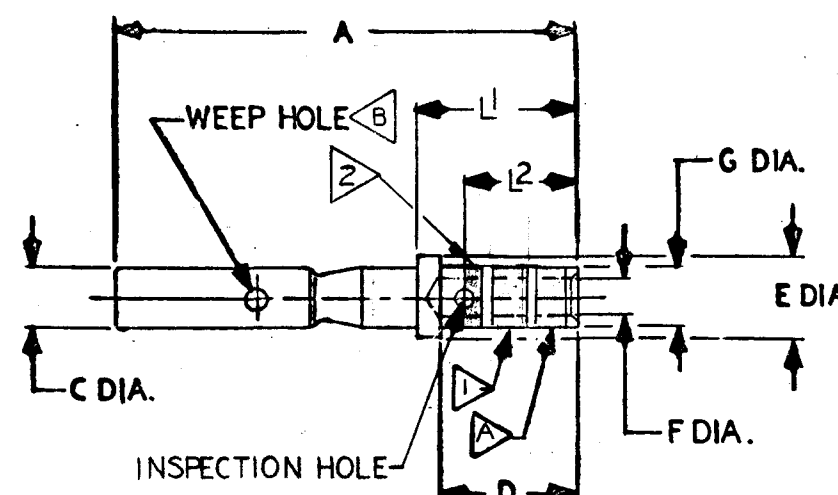


FIGURE III

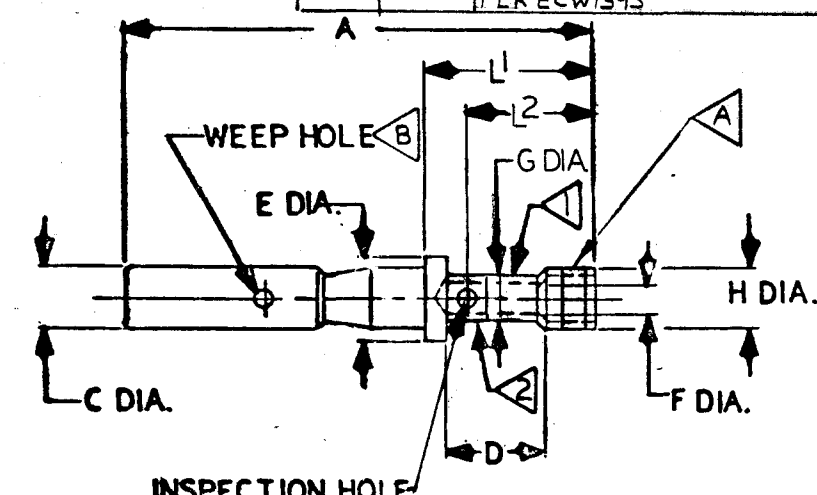


FIGURE IV

CONTACT CATALOG NO.	PIN OR SOCKET	MATING END		WIRE BARREL			TOOLING					FIG.	DIMENSIONS								MATERIAL	WEIGHT LBS/M	FINISH		L1 L2			
		SIZE	COLOR CODE	SIZE	COLOR CODE	ACCOMMODATES		CRIMP TOOL	DIE SET	STOP BUSHING	INSERTION TOOL		EXTRACTION TOOL	A ±.010	B DIA. ±.001	C DIA.	D STRIP LENGTH	E DIA.	F DIA. ±.001	G DIA.					H DIA. ±.001	L1 ±.002	L2 ±.005	
						MIN.	MAX.																					PER
LRM16M-9	P	16	BLUE	16	BLUE	.038	.057	REGULAR GRADE THERMOCOUPLE	M10S-1	S7	SL 2	RTM16-2	RX16-7	I	.905	.0625	—	9/32	.148/.144	.067	.105/.101	—	—	ALUMEL	1.7	NONE	.296	.220
LRC16M-9	S	16	BLUE	16	BLUE	#20	#16	WIRE PER MIL-W-5846 TYPE I, CLASS D,E						III	.844	—	.113/.110	9/32		.067				—	1.8	NONE	.296	.220
LRM16M-10	P	16	BLUE	16	BLUE	.038	.057	WIRE PER MIL-W-5846 TYPE I, CLASS D,E						I	.905	.0625	—	9/32		.067				—	1.7	NONE	.296	.220
LRC16M-10	S	16	BLUE	16	BLUE	#20	#16	WIRE PER MIL-W-5846 TYPE I, CLASS D,E						III	.844	—	.113/.110	9/32		.067				—	1.8	NONE	.296	.220
LRM16M-11	P	16	BLUE	16	BLUE	.038	.057	THERMOCOUPLE WIRE PER MIL-W-5845 TYPE I, CLASS D,E						I	.905	.0625	—	9/32		.067				—	1.4	CAD. PLATE	.296	.220
LRC16M-11	S	16	BLUE	16	BLUE	#20	#16	THERMOCOUPLE WIRE PER MIL-W-5845 TYPE I, CLASS D,E						III	.844	—	.113/.110	9/32		.067				—	1.5	CAD. PLATE	.296	.220
LRM16M-12	P	16	BLUE	16	BLUE	.038	.057	THERMOCOUPLE WIRE PER MIL-W-5845 TYPE I, CLASS D,E						I	.905	.0625	—	9/32		.067				—	1.7	NONE	.296	.220
LRC16M-12	S	16	BLUE	16	BLUE	#20	#16	THERMOCOUPLE WIRE PER MIL-W-5845 TYPE I, CLASS D,E						III	.844	—	.113/.110	9/32		.067				—	1.8	NONE	.296	.220
LRM20W-9	P	20	RED	20	RED	.024	.038	REGULAR GRADE THERMOCOUPLE		S6A	SL-3A	RTM20-5	RX20-24V3	II	.915	.040	—	7/32	.103/.100	.049	.078/.076	.105	—	ALUMEL	.8	NONE	.306	.246
LRC20W-9	S	20	RED	20	RED	#24	#20	WIRE PER MIL-W-5846 TYPE I, CLASS D,E						IV	.854	—	.078/.076	7/32		.049				—	.9	NONE	.306	.246
LRM20W-10	P	20	RED	20	RED	.024	.038	WIRE PER MIL-W-5846 TYPE I, CLASS D,E						II	.915	.040	—	7/32		.049				—	.8	NONE	.306	.246
LRC20W-10	S	20	RED	20	RED	#24	#20	WIRE PER MIL-W-5846 TYPE I, CLASS D,E						IV	.854	—	.078/.076	7/32		.049				—	.9	NONE	.306	.246
LRM20W-11	P	20	RED	20	RED	.024	.038	THERMOCOUPLE WIRE PER MIL-W-5845 TYPE I, CLASS D,E						II	.915	.040	—	7/32		.049				—	.7	CAD. PLATE	.306	.246
LRC20W-11	S	20	RED	20	RED	#24	#20	THERMOCOUPLE WIRE PER MIL-W-5845 TYPE I, CLASS D,E						IV	.854	—	.078/.076	7/32		.049				—	.8	CAD. PLATE	.306	.246
LRM20W-12	P	20	RED	20	RED	.024	.038	THERMOCOUPLE WIRE PER MIL-W-5845 TYPE I, CLASS D,E						II	.915	.040	—	7/32		.049				—	.8	NONE	.306	.246
LRC20W-12	S	20	RED	20	RED	#24	#20	THERMOCOUPLE WIRE PER MIL-W-5845 TYPE I, CLASS D,E						IV	.854	—	.078/.076	7/32		.049				—	.9	NONE	.306	.246

NOTES:

GREEN DENOTES ALUMEL
WHITE DENOTES CHROMEL
YELLOW DENOTES CONSTANTAN
BLACK DENOTES IRON

THERMOCOUPLE CONTACTS ONLY

WEEP HOLE ON LRC16M-11 AND
LRC20W-11 ONLY.

CONSULT FACTORY FOR
AVAILABILITY.

FSCM NO. 09922

THERMOCOUPLE CONTACTS	
BANTAM PIN AND SOCKET CONTACTS	
CAT. NO. LRM/LRC	(TABLE)
DRAWN RJR2	CHECKED 10-29-70
DES. APPROV. 11/13/70	REV. 11/13/70
PROD. APPROV. 11/13/70	
DRAWING NO. SD7117S13	
SHEET 2 OF 2	
DOB-1069	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru