

Omron STI

# Application Support

**Thank you for your interest in Omron STI products.**

Please contact Omron STI with your application questions.

**Support Engineers** are available at our USA headquarters from 4:00 a.m. until 5:00 p.m. Pacific Time to answer your technical questions and provide application assistance. **Simply dial 1/888/510-4357 or 1/510/608-3400 and a support engineer will be happy to assist you.**



Information can also be obtained 24 hours a day via our **Website** at [www.sti.com](http://www.sti.com) or [www.omron.ca](http://www.omron.ca).

Turn the page for detailed

**Product  
Information.**



**OMRON SCIENTIFIC TECHNOLOGIES, INC.**

USA Headquarters  
6550 Dumbarton Circle  
Fremont, CA 94555-3605  
Tel: 1/510/608-3400  
Fax: 1/510/744-1442  
Email: [sales@sti.com](mailto:sales@sti.com)  
[www.sti.com](http://www.sti.com)

Omron Canada, Inc.  
885 Milner Avenue  
Toronto, Ontario M1B 5V8  
Tel: 1/416/286-6465  
Fax: 1/416/286-6648  
Email: [askomron@omron.com](mailto:askomron@omron.com)  
[www.omron.ca](http://www.omron.ca)

# Slim Safety Door Switch

## D4GS-N

CSM\_D4GS-N\_DS\_E\_2\_1

## Slim Safety Door Switches with IP67 Rating

- Slim design with a width of only 17 mm (three-contact models).
- Reversible design allowing either front or rear mounting.
- Built-in Switches with two- or three-terminal contact construction are available.
- Operation Key with rubber mounting hole to absorb vibration and shock.
- IP67 degree of protection.

 Be sure to read the "Safety Precautions" on page 8 and the "Precautions for All Safety Door Switches".



## Model Number Structure

### Model Number Legend

#### Switch

D4GS-N□□-□  
1 2 3

##### 1. Built-in Switch

- 1: 1NC/1NO (slow-action)
- 2: 2NC (slow-action)
- 3: 2NC/1NO (slow-action)
- 4: 3NC (slow-action)

##### 2. Direction of Operation

**Key Insertion**  
R: Horizontal  
T: Vertical

##### 3. Cable Length

Blank: 1 m  
3: 3 m  
5: 5 m

#### Operation Key

D4GS-NK□  
1

##### 1. Operation Key Type

- 1: Horizontal mounting
- 2: Vertical mounting
- 4: Adjustable mounting (Vertical)

## Ordering Information

### List of Models

Switches (Operation Keys are sold separately.)

 : Models with certified direct opening contacts.

| Appearance                                                                          | Direction of Operation Key insertion | Cable length | 1NC/1NO (Slow-action) | 2NC (Slow-action) | 2NC/1NO (Slow-action) | 3NC (Slow-action) |
|-------------------------------------------------------------------------------------|--------------------------------------|--------------|-----------------------|-------------------|-----------------------|-------------------|
|  | Horizontal                           | 1 m          | D4GS-N1R              | D4GS-N2R          | D4GS-N3R              | D4GS-N4R          |
|                                                                                     |                                      | 3 m          | D4GS-N1R-3            | D4GS-N2R-3        | D4GS-N3R-3            | D4GS-N4R-3        |
|                                                                                     |                                      | 5 m          | D4GS-N1R-5            | D4GS-N2R-5        | D4GS-N3R-5            | D4GS-N4R-5        |
|  | Vertical                             | 1 m          | D4GS-N1T              | D4GS-N2T          | D4GS-N3T              | D4GS-N4T          |
|                                                                                     |                                      | 3 m          | D4GS-N1T-3            | D4GS-N2T-3        | D4GS-N3T-3            | D4GS-N4T-3        |
|                                                                                     |                                      | 5 m          | D4GS-N1T-5            | D4GS-N2T-5        | D4GS-N3T-5            | D4GS-N4T-5        |

### Operation Keys

| Type                                                                                                       | Model    | Type                                                                                                                  | Model    |
|------------------------------------------------------------------------------------------------------------|----------|-----------------------------------------------------------------------------------------------------------------------|----------|
| Horizontal mounting<br> | D4GS-NK1 | Adjustable mounting (Vertical)<br> | D4GS-NK4 |
| Vertical mounting<br>   | D4GS-NK2 |                                                                                                                       |          |

## Specifications

### Standards and EC Directives

#### Conforms to the following EC Directives:

- Machinery Directive
- Low Voltage Directive
- EN1088
- EN60204-1

### Certified Standards

| Certification body | Standard                                              | File No.         |
|--------------------|-------------------------------------------------------|------------------|
| TÜV Rheinland      | EN60947-5-1<br>(certified direct opening)<br>GS-ET-15 | J2051125         |
| UL *               | UL508<br>CSA C22.2 No. 14                             | E76675           |
| CQC (CCC)          | GB14048.5                                             | 2003010305064262 |

\* Certification for CSA C22.2 No. 14 is authorized by the UL mark.

### Certified Standard Ratings

#### TÜV (EN60947-5-1), CCC (GB14048.5)

| Item                                      | Utilization category | AC-15  | DC-13  |
|-------------------------------------------|----------------------|--------|--------|
| Rated operating current (I <sub>e</sub> ) |                      | 0.75 A | 0.27 A |
| Rated operating voltage (U <sub>e</sub> ) |                      | 240 V  | 250 V  |

**Note:** Use a 10 A fuse type gI or gG that conforms to IEC60269 as a short-circuit protection device.

#### UL/CSA (UL508, CSA C22.2 No. 14)

##### C300

| Rated voltage | Carry current | Current (A) |       | Volt-amperes (VA) |       |
|---------------|---------------|-------------|-------|-------------------|-------|
|               |               | Make        | Break | Make              | Break |
| 120 VAC       | 2.5 A         | 15          | 1.5   | 1,800             | 180   |
| 240 VAC       |               | 7.5         | 0.75  |                   |       |

##### Q300

| Rated voltage | Carry current | Current (A) |       | Volt-amperes (VA) |       |
|---------------|---------------|-------------|-------|-------------------|-------|
|               |               | Make        | Break | Make              | Break |
| 125 VDC       | 2.5 A         | 0.55        | 0.55  | 69                | 69    |
| 250 VDC       |               | 0.27        | 0.27  |                   |       |

## Characteristics

|                                                               |                                                                      |                                                                                                                                                                              |
|---------------------------------------------------------------|----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Degree of protection *1</b>                                |                                                                      | IP67 (EN60947-5-1)                                                                                                                                                           |
| <b>Durability *2</b>                                          | <b>Mechanical</b>                                                    | 1,000,000 operations min.                                                                                                                                                    |
|                                                               | <b>Electrical</b>                                                    | 100,000 operations min. (1 A resistive load at 125 VAC) *3                                                                                                                   |
| <b>Operating speed</b>                                        |                                                                      | 0.1 to 0.5 m/s                                                                                                                                                               |
| <b>Operating frequency</b>                                    |                                                                      | 30 operations/minute max.                                                                                                                                                    |
| <b>Direct opening force *4</b>                                |                                                                      | 60 N min.                                                                                                                                                                    |
| <b>Direct opening travel *4</b>                               |                                                                      | 10 mm min.                                                                                                                                                                   |
| <b>Contact resistance</b>                                     |                                                                      | 300 mΩ max. (with 1 m cable)                                                                                                                                                 |
| <b>Minimum applicable load *5</b>                             |                                                                      | Resistive load of 4 mA at 24 VDC (N-level reference value)                                                                                                                   |
| <b>Rated insulation voltage (U<sub>i</sub>)</b>               |                                                                      | 250 V                                                                                                                                                                        |
| <b>Rated frequency</b>                                        |                                                                      | 50/60 Hz                                                                                                                                                                     |
| <b>Protection against electric shock</b>                      |                                                                      | Class II (double insulation) (IEC60536)                                                                                                                                      |
| <b>Pollution degree (operating environment)</b>               |                                                                      | 3 (EN60947-5-1)                                                                                                                                                              |
| <b>Impulse withstand voltage (EN60947-5-1)</b>                | <b>Between terminals of same polarity</b>                            | 2.5 kV                                                                                                                                                                       |
|                                                               | <b>Between terminals of different polarity</b>                       | 4 kV                                                                                                                                                                         |
|                                                               | <b>Between each terminal and non-current carrying metallic parts</b> | 6 kV                                                                                                                                                                         |
| <b>Insulation resistance</b>                                  |                                                                      | 100 MΩ min. (at 500 VDC) between terminals of the same polarities, between terminals of different polarities, and between each terminal and non-current carrying metal parts |
| <b>Contact gap</b>                                            |                                                                      | 2 × 2 mm min.                                                                                                                                                                |
| <b>Vibration resistance</b>                                   | <b>Malfunction</b>                                                   | 10 to 55 Hz, 0.35 mm single amplitude                                                                                                                                        |
| <b>Shock resistance</b>                                       | <b>Destruction</b>                                                   | 1,000 m/s <sup>2</sup> min.                                                                                                                                                  |
|                                                               | <b>Malfunction</b>                                                   | 300 m/s <sup>2</sup> min.                                                                                                                                                    |
| <b>Conditional short-circuit current</b>                      |                                                                      | 100 A (EN60947-5-1)                                                                                                                                                          |
| <b>Conventional free air thermal current (I<sub>th</sub>)</b> |                                                                      | 2.5 A (EN60947-5-1)                                                                                                                                                          |
| <b>Ambient operating temperature</b>                          |                                                                      | –30 to 70°C (with no icing)                                                                                                                                                  |
| <b>Ambient operating humidity</b>                             |                                                                      | 95% max.                                                                                                                                                                     |
| <b>Cable</b>                                                  |                                                                      | UL2464 No. 22 AWG, finishing O.D.: 7.2 mm                                                                                                                                    |
| <b>Weight</b>                                                 |                                                                      | Approx. 120 g (D4GS-N1R, with 1 m cable)                                                                                                                                     |

**Note: 1.** The above values are initial values.

**2.** The Switch contacts can be used with either standard loads or microloads. Once the contacts have been used to switch a load, however, they cannot be used to switch smaller loads. The contact surfaces will become rough once they have been used and contact reliability for smaller loads may be reduced.

**\*1.** The degree of protection shown above is based on the test method specified in EN60947-5-1. Be sure to confirm in advance the sealing performance under the actual operating environment and conditions.

Although the switch box is protected from dust, oil, or water penetration, do not use the D4GS-N in places where dust, oil, water, or chemicals may enter through the key hole on the head, otherwise Switch damage or malfunctioning may occur.

**\*2.** The durability conditions are an ambient temperature of 5 to 35°C and an ambient humidity of 40% to 70%. For more details, consult your OMRON representative.


**\*3.** When the ambient temperature is 35°C or higher, do not apply 1 A at 125 VAC to more than one circuit.

**\*4.** These figures are minimum requirements for safe operation.

**\*5.** The value given for minimum applicable load is a reference value for microloads. The value will vary depending on factors such as the switching frequency, the ambient environment, and the reliability level. Be sure to confirm correct operation with the actual load before application.

## Structure and Nomenclature

### Structure

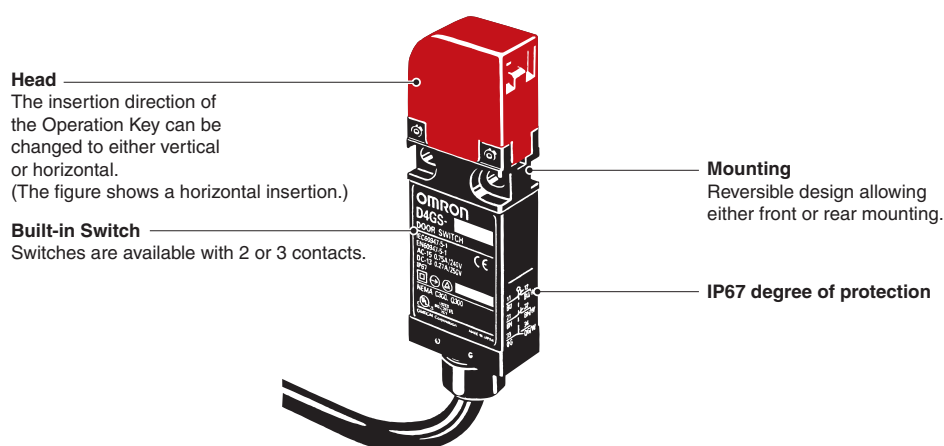

### Contact Form (Diagrams Show State with Key Inserted.)

| Model      | Contact | Contact form | Operating pattern | Remarks                                                                                                                                                         |
|------------|---------|--------------|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| D4GS-N1□-□ | 1NC/1NO |              |                   | <p>Only NC contact 11-12 has a certified direct opening mechanism. ➡</p> <p>The terminals 11-12 and 33-34 can be used as unlike poles.</p>                      |
| D4GS-N2□-□ | 2NC     |              |                   | <p>NC contacts 11-12 and 31-32 have a certified direct opening mechanism. ➡</p> <p>The terminals 11-12 and 31-32 can be used as unlike poles.</p>               |
| D4GS-N3□-□ | 2NC/1NO |              |                   | <p>Only NC contacts 11-12 and 21-22 have a certified direct opening mechanism. ➡</p> <p>The terminals 11-12, 21-22 and 33-34 can be used as unlike poles.</p>   |
| D4GS-N4□-□ | 3NC     |              |                   | <p>NC contacts 11-12, 21-22 and 31-32 have a certified direct opening mechanism. ➡</p> <p>The terminals 11-12, 21-22 and 31-32 can be used as unlike poles.</p> |



**Note:** The terminal numbers are according to EN50013, and the contact symbols are according to IEC 60947-5-1.

# Dimensions and Operating Characteristics

(Unit: mm)

## Switches



### D4GS-N□R-□

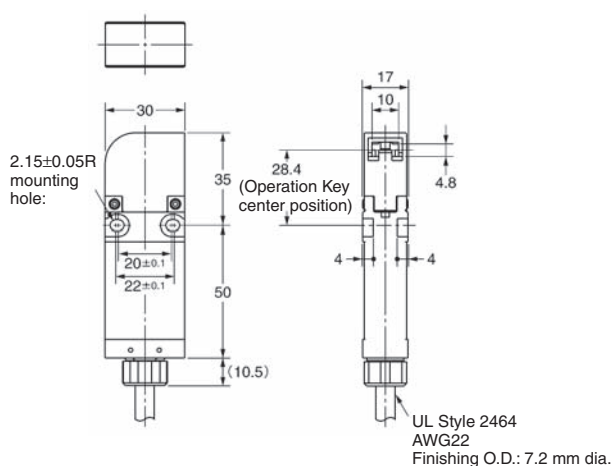

### Operating characteristics

|                              |            |
|------------------------------|------------|
| Key insertion force          | 15 N max.  |
| Key extraction force         | 30 N max.  |
| Pretravel (PT)               | 6.8±3 mm   |
| Movement before being locked | (22 mm)    |
| Direct opening force         | 60 N min.  |
| Direct opening stroke        | 10 mm min. |


### D4GS-N□T-□

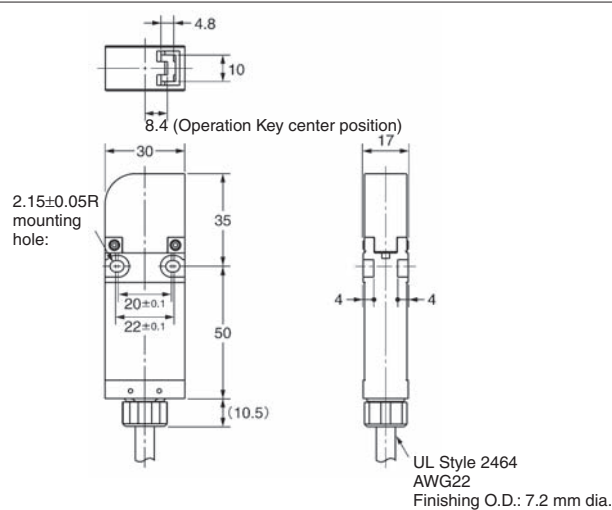


- Note:**
1. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions. Dimensions in parentheses are reference values.
  2. There are fluctuations in the contact ON/OFF timing for Switches with multiple poles (2NC, 2NC/1NO, or 3NC). Confirm performance before application.

## Operation Keys


D4GS-NK1

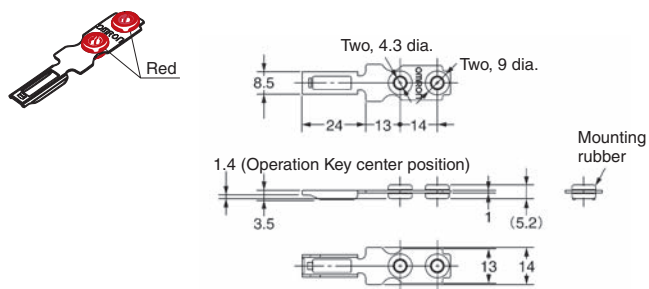

D4GS-NK2

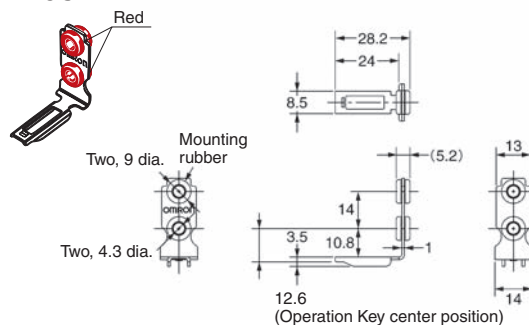


D4GS-NK4

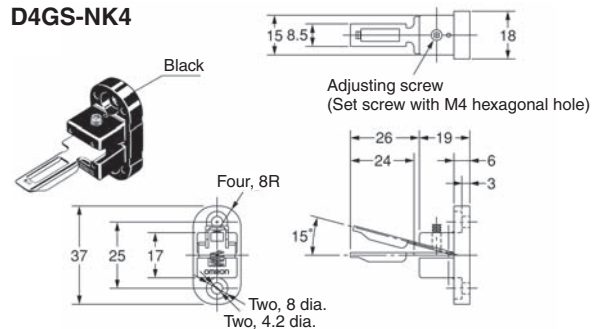


**Note:** Unless otherwise specified, a tolerance of  $\pm 0.4$  mm applies to all dimensions. Dimensions in parentheses are reference values.

## With Operation Key Inserted

D4GS-N□R□ + D4GS-NK1

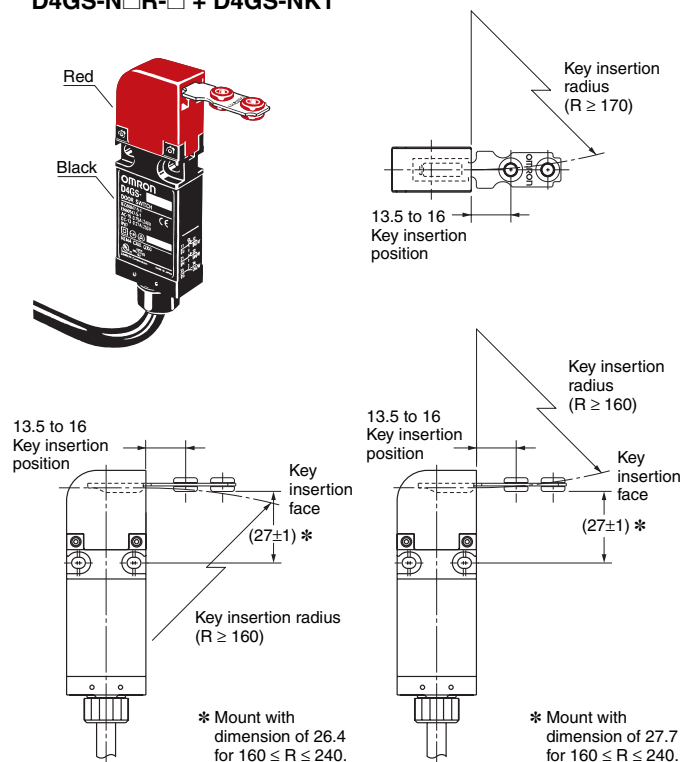


D4GS-N□T□ + D4GS-NK1

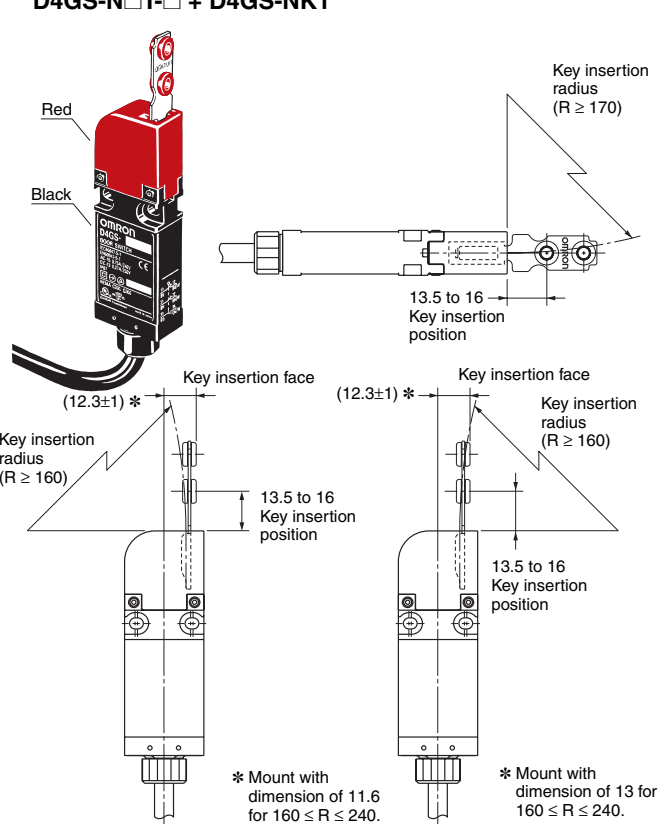


**Note:** Unless otherwise specified, a tolerance of  $\pm 0.4$  mm applies to all dimensions. Dimensions in parentheses are reference values.


## D4GS-N□R-□ + D4GS-NK2

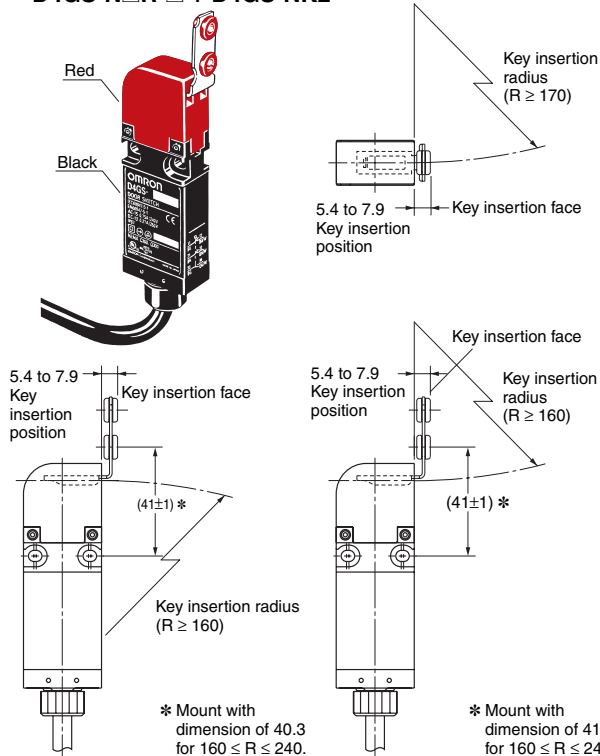

## D4GS-N□T-□ + D4GS-NK2

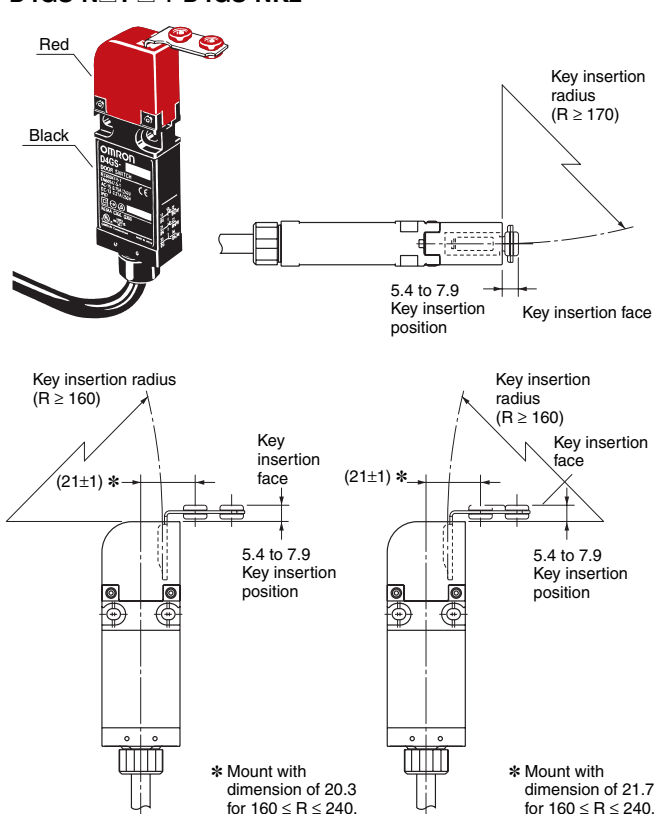


## D4GS-N□R-□ + D4GS-NK4

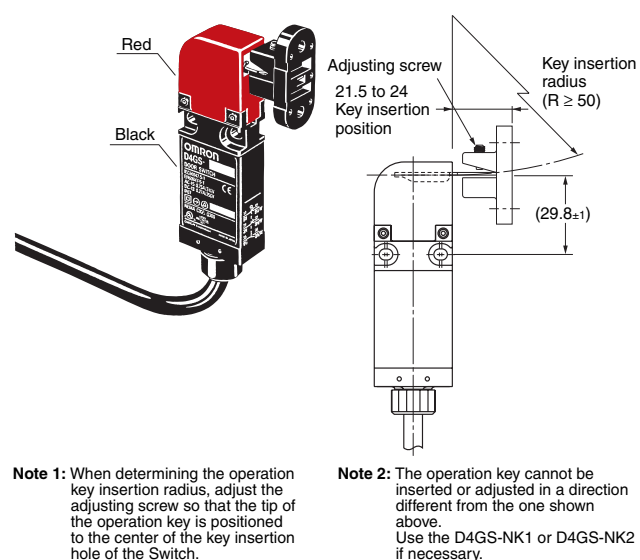

**Note 1:** When determining the operation key insertion radius, adjust the adjusting screw so that the tip of the operation key is positioned to the center of the key insertion hole of the Switch.

**Note 2:** The operation key cannot be inserted or adjusted in a direction different from the one shown above. Use the D4GS-NK1 or D4GS-NK2 if necessary.

## D4GS-N□T-□ + D4GS-NK4

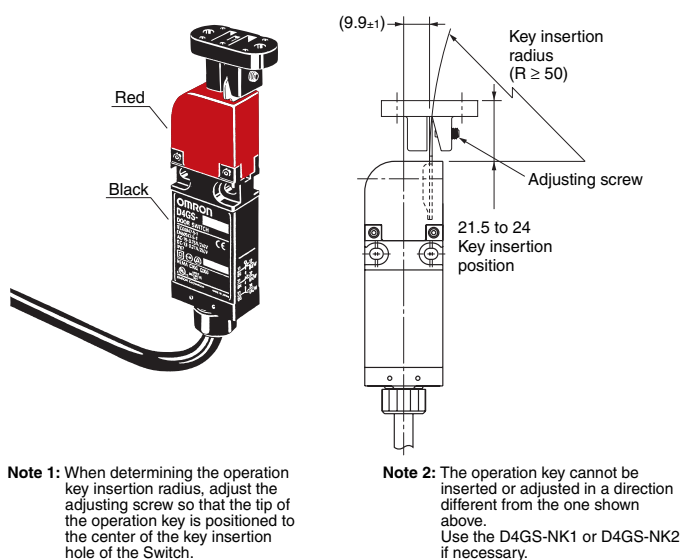

**Note 1:** When determining the operation key insertion radius, adjust the adjusting screw so that the tip of the operation key is positioned to the center of the key insertion hole of the Switch.

**Note 2:** The operation key cannot be inserted or adjusted in a direction different from the one shown above. Use the D4GS-NK1 or D4GS-NK2 if necessary.

**Note:** Unless otherwise specified, a tolerance of  $\pm 0.4$  mm applies to all dimensions. Dimensions in parentheses are reference values.

## Safety Precautions


Refer to the “*Precautions for All Switches*” and “*Precautions for All Safety Door Switches*”.

### Precautions for Safe Use

- Do not use the Switch submersed in oil or water or in locations continuously subject to splashes of oil or water. Doing so may result in oil or water entering the Switch. (The IP67 degree of protection of the Switch specifies the amount of water penetration after the Switch is submerged in water for a certain period of time.)
- Although the Switch body is protected from the ingress of dust or water, the head is not protected. Do not allow foreign substance to enter through the head. Otherwise, accelerated wear or breaking may result.
- Do not switch circuits for two or more standard loads (125 VAC, 1 A). Doing so may adversely affect insulation performance.
- Do not use the D4GS-N□ Switch or D4GS-NK□ Operation Key (rubber color: red) in combination with the D4GS-□ Switch or D4GS-K□ Operation Key (rubber color: black).

### Handling Cables

- Cables must not be bent repeatedly.
- A cable is fixed with sealing materials on the bottom of the D4GS-N. When excessive force may be imposed on the cable, fix the cable with a fixing unit at the distance of 5 cm from the bottom of the D4GS-N as shown.
- When bending the cable, secure the cable with more than 45 mm bending radius so as not to cause damage to the insulator or sheath of the cable. Otherwise, fire or electrical shock may result.




- Do not fasten or loosen the conduit at the bottom of the D4GS-N.
- When wiring, be sure not to allow a liquid such as water or oil into the tip of cable.

### Stopper Installation

Do not use a Switch as a stopper.

Be sure to install a stopper as shown in the following illustration when mounting the Switch and adjust the stopper so that the Operation Key is within the setting zone.

Do not subject the Switch to a shock that exceeds the Switch's shock resistance of 1,000 m/s<sup>2</sup>.

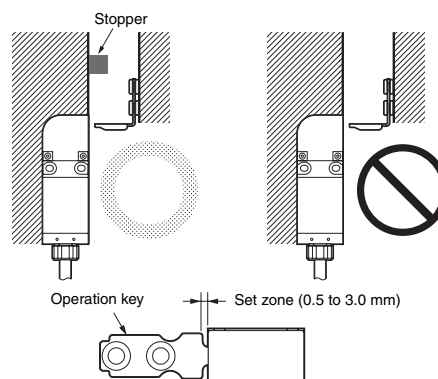

## Precautions for Correct Use

The Switch contacts can be used with either standard loads or microloads. Once the contacts have been used to switch a load, however, they cannot be used to switch smaller loads. The contact surfaces will become rough once they have been used and contact reliability for smaller loads may be reduced.

## Mounting Methods


### Appropriate Tightening Torque

- Loose screws may result in malfunction. Tighten the screws to the specified torques.

| Type                         | Torque           | Size     |
|------------------------------|------------------|----------|
| Body mounting screw          | 0.75 to 1.15 N·m | M4 screw |
| Operation Key mounting screw | 0.75 to 1.15 N·m | M4 screw |


- Use the specified sizes of mounting screws flat or spring washers to mount the Switch and Operation Key, and tighten the screws to the proper tightening torque. To ensure safety, use screws that cannot be easily removed or another means to prevent the Switch and Operation Key from easily being removed.

## Mounting Hole Dimensions for Switches




## Mounting Hole Dimensions for Operation Keys

D4GS-NK1/NK2




D4GS-NK4



## Operation Key

- As shown below, mount the Operation Key after matching the concave surface of the Operation Key with the convex surface of the insertion face.




- Depending on the conditions in which the Switch is used, the rubber of the Operation Key may deteriorate. If the rubber becomes deformed or cracked, replace it as soon as possible.

## Wiring

### Identifying Wires

Identify wires according to the color (with or without white lines) of the insulation on the wire.

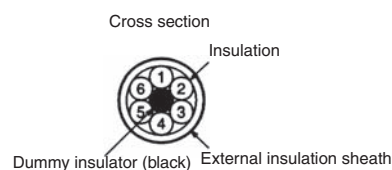

### Core Insulator Colors


Blue/white, Brown/white, Orange/white, Orange, Brown, and Blue

Example: Orange/white is an orange insulator with a white line.


## Terminal Numbers

- Identify terminal numbers based on the color of the insulation on the wire.
- The safety and auxiliary contacts of D4GS-N models of three-terminal contact construction and those of two-terminal contact construction are described below.
- The auxiliary contacts (orange) can be used as safety contacts.
- The safety contacts are direct opening contacts certified by EN and each of them is indicated with the mark  $\ominus$ .


### <1NC/1NO>




### <2NC>



### <2NC/1NO>



### <3NC>



- Cut the black dummy insulator and all unused wires at the end of the external insulation sheath when wiring the cable.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)