


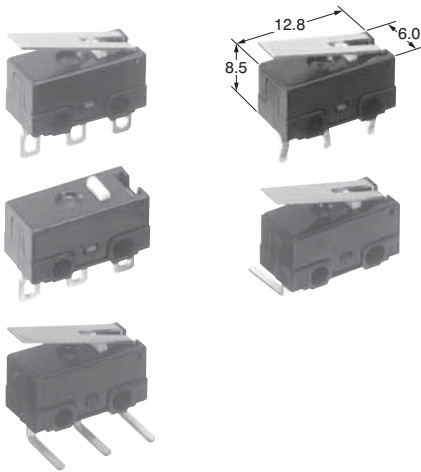

### FEATURES

- Integrally molded terminal block—prevents soldering flux from entering into housing
- Compact size—minimizes size of equipment
- Flat terminal shape—makes soldering easy
- Low-level circuit type available
- Self-standing PC board terminal type available

### TYPICAL APPLICATIONS

- Computer mouse
- Charger unit for mobile phone
- Detection of key position for automobiles

## ORDERING INFORMATION

Ex. AH 1 4 8 0 61 9

| Product Name | Terminal                                                                                                                                                                                                                                  | Operating force by pin plunger (max.)                | Actuator                                                      | Contact                                       | Agency standard |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------|-----------------|
| FJ           | 4: 2.0 mm Self-standing PC board terminal with stand off<br>5: Straight PC board terminal with stand off<br>6: 2.0 mm Solder terminal with stand off<br>7: 2.0 mm PC board right angle terminal<br>8: 2.0 mm PC board left angle terminal | 6: 1.47 N with stand off<br>8: 0.74 N with stand off | 0: Pin plunger<br>2: Hinge lever<br>4: Simulated roller lever | Nil: AgNi alloy<br>61: AgNi alloy + Gold-clad | 9: UL/CSA       |

Remark: 2.0 mm PC board terminal straight type is available. For details, please consult us.

## PRODUCT TYPES

The color of:

|                   | Color | Body  | Cap   | Plunger |
|-------------------|-------|-------|-------|---------|
| Type              |       |       |       |         |
| Standard          |       | Black | Black | White   |
| Low-level circuit |       | Black | Black | Red     |

### 1. Self-standing PC board terminal

| Actuators              | Operating force, max. | Standard (AgNi alloy contact) | Low-level circuit (AgNi alloy + Gold-clad contact) |
|------------------------|-----------------------|-------------------------------|----------------------------------------------------|
|                        |                       | SPDT                          | SPDT                                               |
| Pin plunger            | 0.74 N                | AH14809                       | AH1480619                                          |
|                        | 1.47 N                | AH14609                       | AH1460619                                          |
| Hinge lever            | 0.25 N                | AH14829                       | AH1482619                                          |
|                        | 0.49 N                | AH14629                       | AH1462619                                          |
| Simulated roller lever | 0.26 N                | AH14849                       | AH1484619                                          |
|                        | 0.54 N                | AH14649                       | AH1464619                                          |

# AH1

## 2. Straight PC board terminal

| Actuators              | Operating force, max. | Standard<br>(AgNi alloy contact) | Low-level circuit<br>(AgNi alloy + Gold-clad contact) |
|------------------------|-----------------------|----------------------------------|-------------------------------------------------------|
|                        |                       | SPDT                             | SPDT                                                  |
| Pin plunger            | 0.74 N                | AH15809                          | AH1580619                                             |
|                        | 1.47 N                | AH15609                          | AH1560619                                             |
| Hinge lever            | 0.25 N                | AH15829                          | AH1582619                                             |
|                        | 0.49 N                | AH15629                          | AH1562619                                             |
| Simulated roller lever | 0.26 N                | AH15849                          | AH1584619                                             |
|                        | 0.54 N                | AH15649                          | AH1564619                                             |

## 3. Solder terminal

| Actuators              | Operating force, max. | Standard<br>(AgNi alloy contact) | Low-level circuit<br>(AgNi alloy + Gold-clad contact) |
|------------------------|-----------------------|----------------------------------|-------------------------------------------------------|
|                        |                       | SPDT                             | SPDT                                                  |
| Pin plunger            | 0.74 N                | AH16809                          | AH1680619                                             |
|                        | 1.47 N                | AH16609                          | AH1660619                                             |
| Hinge lever            | 0.25 N                | AH16829                          | AH1682619                                             |
|                        | 0.49 N                | AH16629                          | AH1662619                                             |
| Simulated roller lever | 0.26 N                | AH16849                          | AH1684619                                             |
|                        | 0.54 N                | AH16649                          | AH1664619                                             |

## 4. PC board right angle terminal

| Actuators              | Operating force, max. | Standard<br>(AgNi alloy contact) | Low-level circuit<br>(AgNi alloy + Gold-clad contact) |
|------------------------|-----------------------|----------------------------------|-------------------------------------------------------|
|                        |                       | SPDT                             | SPDT                                                  |
| Pin plunger            | 0.74 N                | AH17809                          | AH1780619                                             |
|                        | 1.47 N                | AH17609                          | AH1760619                                             |
| Hinge lever            | 0.25 N                | AH17829                          | AH1782619                                             |
|                        | 0.49 N                | AH17629                          | AH1762619                                             |
| Simulated roller lever | 0.26 N                | AH17849                          | AH1784619                                             |
|                        | 0.54 N                | AH17649                          | AH1764619                                             |

## 5. PC board left angle terminal

| Actuators              | Operating force, max. | Standard<br>(AgNi alloy contact) | Low-level circuit<br>(AgNi alloy + Gold-clad contact) |
|------------------------|-----------------------|----------------------------------|-------------------------------------------------------|
|                        |                       | SPDT                             | SPDT                                                  |
| Pin plunger            | 0.74 N                | AH18809                          | AH1880619                                             |
|                        | 1.47 N                | AH18609                          | AH1860619                                             |
| Hinge lever            | 0.25 N                | AH18829                          | AH1882619                                             |
|                        | 0.49 N                | AH18629                          | AH1862619                                             |
| Simulated roller lever | 0.26 N                | AH18849                          | AH1884619                                             |
|                        | 0.54 N                | AH18649                          | AH1864619                                             |

Remarks: 1. The appearance of right and left angle types are as below.

Right angle



Left angle



- 2. Standard packing: 50 pcs./tube.
- 3. Please consult us for the delivery schedule of PC board terminal SPST-NO type.

# APPLICABLE CURRENT RANGE

| Contact                                           | Applicable current range |      |     |     | Max. operating force for operation (at pin plunger) |        |
|---------------------------------------------------|--------------------------|------|-----|-----|-----------------------------------------------------|--------|
|                                                   | 1 mA                     | 0.1A | 1 A | 3 A | 0.74 N                                              | 1.47 N |
| Standard type<br>(AgNi alloy)                     |                          |      |     |     | ●                                                   |        |
|                                                   |                          |      |     |     |                                                     | ●      |
| Low-level circuit type<br>(AgNi alloy + Gdd-clad) |                          |      |     |     | ●                                                   |        |
|                                                   |                          |      |     |     |                                                     | ●      |

## SPECIFICATIONS

### 1. Contact rating (resistive load)

|                                       |          | Standard rating           | Minimum rating                    |
|---------------------------------------|----------|---------------------------|-----------------------------------|
| Standard type<br>(AgNi alloy contact) | OF 0.74N | 1A 125V AC, 1A 30V DC     | —                                 |
|                                       | OF 1.47N | 3A 125V AC, 2A 30V DC     | —                                 |
| Low-level circuit type                |          | 0.1A 125V AC, 0.1A 30V DC | 5mA 6V DC, 2mA 12V DC, 1mA 24V DC |

### 2. Characteristics

| Contact arrangement                                                                                                             | Standard type                                                         | Low-level circuit type                            |
|---------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|---------------------------------------------------|
| Expected life (min. operations)<br>Electrical (at rated load, 20 cpm) (O.T.: Max.)                                              | $3 \times 10^4$                                                       | $10^5$                                            |
| Expected life (min. operations)<br>Mechanical (at 60 cpm) (O.T.: Specified value)                                               | O.F. 0.74 N: $10^6$<br>O.F. 1.47 N: $5 \times 10^5$                   |                                                   |
| Dielectric strength (initial)<br>Between terminals<br>Between terminals and other exposed parts<br>Between terminals and ground | 600 Vrms for 1 min.<br>1,500 Vrms for 1 min.<br>1,500 Vrms for 1 min. |                                                   |
| Insulation resistance (min. at 500V DC)                                                                                         | 100 MΩ                                                                |                                                   |
| Initial Contact resistance                                                                                                      | Max. 30 mΩ<br>(by voltage drop, 1A 6 to 8V DC)                        | Max. 100 mΩ<br>(by voltage drop, 0.1A 6 to 8V DC) |
| Allowable operating speed (no load)                                                                                             | 1 to 500 mm/s                                                         |                                                   |
| Max. operating cycle rate (no load)                                                                                             | 120 cpm                                                               |                                                   |
| Ambient temperature                                                                                                             | -25 to +85°C (not freezing below 0°C)                                 |                                                   |
| Shock resistance (pin plunger type)                                                                                             | Min. 294 m/s <sup>2</sup> (contact opening: Max. 1ms)                 |                                                   |
| Vibration resistance (pin plunger type)                                                                                         | 10 to 55 Hz at single amplitude of 0.75mm (contact opening: max. 1ms) |                                                   |

### 3. Operating characteristics

#### 1) Pin plunger

| 3rd digit of part no. | Operating force, max. | Release force, min. | Pretravel, max. mm | Movement differential, max. mm | Overtravel, min. mm | Operating position mm                                                          |
|-----------------------|-----------------------|---------------------|--------------------|--------------------------------|---------------------|--------------------------------------------------------------------------------|
| 6                     | 0.47 N                | 0.20 N              | 0.5                | 0.12                           | 0.25                | 7±0.3<br>(distance from stand off)<br>5.5±0.2<br>(distance from mounting hole) |
| 8                     | 0.74 N                | 0.098 N             |                    |                                |                     | 7±0.3<br>(distance from stand off)<br>5.5±0.2<br>(distance from mounting hole) |

#### 2) Hinge lever


| 3rd digit of part no. | Operating force, max. | Release force, min. | Pretravel, max. mm | Movement differential, max. mm | Overtravel, min. mm | Operating position mm                                                            |
|-----------------------|-----------------------|---------------------|--------------------|--------------------------------|---------------------|----------------------------------------------------------------------------------|
| 6                     | 0.49 N                | 0.049 N             | 2.1                | 0.5                            | 0.55                | 8.3±1.2<br>(distance from stand off)<br>6.8±1.0<br>(distance from mounting hole) |
| 8                     | 0.25 N                | 0.025 N             |                    |                                |                     | 8.3±1.2<br>(distance from stand off)<br>6.8±1.0<br>(distance from mounting hole) |

#### 3) Simulated roller lever


| 3rd digit of part no. | Operating force, max. | Release force, min. | Pretravel, max. mm | Movement differential, max. mm | Overtravel, min. mm | Operating position mm                                                             |
|-----------------------|-----------------------|---------------------|--------------------|--------------------------------|---------------------|-----------------------------------------------------------------------------------|
| 6                     | 0.54 N                | 0.039 N             | 2.1                | 0.5                            | 0.5                 | 11.0±1.2<br>(distance from stand off)<br>9.5±1.0<br>(distance from mounting hole) |
| 8                     | 0.26 N                | 0.020 N             |                    |                                |                     | 11.0±1.2<br>(distance from stand off)<br>9.5±1.0<br>(distance from mounting hole) |

DATA

Gold-clad type  
Range of low-level current voltage

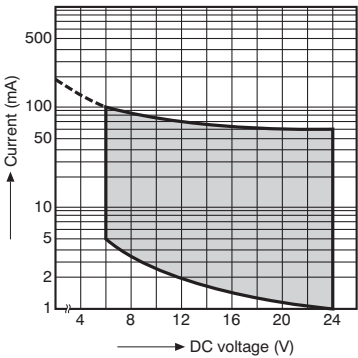

CONTACT ARRANGEMENT




DIMENSIONS

Interested in CAD data? You can obtain CAD data for all products with a **CAD Data** mark from [your local Panasonic Electric Works representative](#).


1. Self-standing PC board terminal (standard type)

Pin plunger

CAD Data

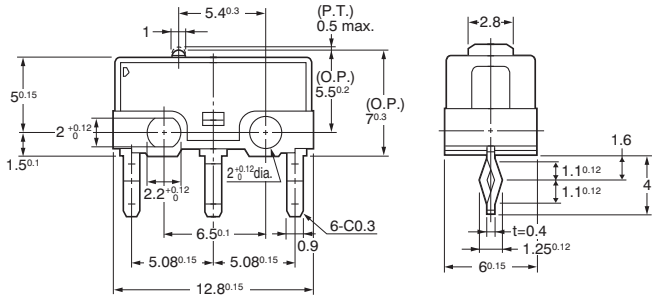


PC board pattern




|                                |                                 |         |
|--------------------------------|---------------------------------|---------|
| Pretravel, max. mm             |                                 | 0.5     |
| Movement differential, max. mm |                                 | 0.12    |
| Overtravel, min. mm            |                                 | 0.25    |
| Operating position             | Distance from mounting hole, mm | 5.5±0.2 |
|                                | Distance from standoff, mm      | 7±0.3   |

Hinge lever

CAD Data

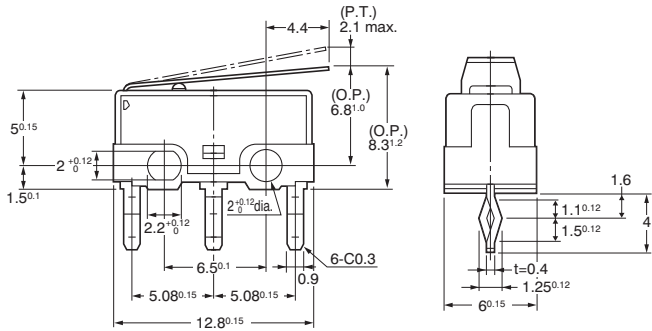


PC board pattern




|                                |                                 |         |
|--------------------------------|---------------------------------|---------|
| Pretravel, max. mm             |                                 | 2.1     |
| Movement differential, max. mm |                                 | 0.5     |
| Overtravel, min. mm            |                                 | 0.5     |
| Operating position             | Distance from mounting hole, mm | 6.8±1.0 |
|                                | Distance from standoff, mm      | 8.3±1.2 |

Simulated roller lever

CAD Data

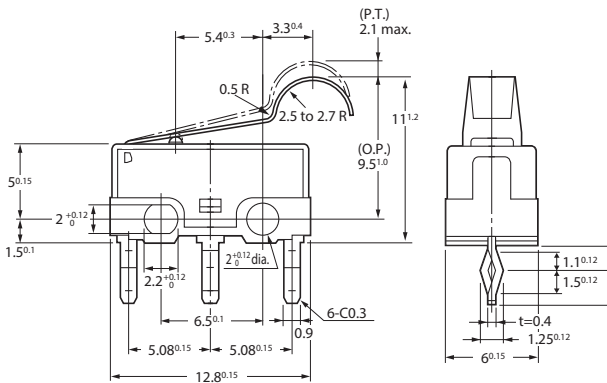

PC board pattern




|                                |                                 |          |
|--------------------------------|---------------------------------|----------|
| Pretravel, max. mm             |                                 | 2.1      |
| Movement differential, max. mm |                                 | 0.5      |
| Overtravel, min. mm            |                                 | 0.5      |
| Operating position             | Distance from mounting hole, mm | 9.5±1.0  |
|                                | Distance from standoff, mm      | 11.0±1.2 |

## 2. Solder terminal

### Pin plunger

#### CAD Data


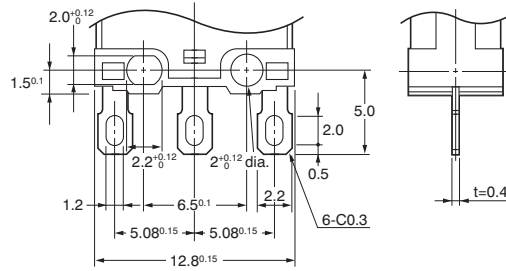


Remark: As for other actuator types, dimensions are the same as those of corresponding standard PC board terminal type.


## 3. PC board right/left angle terminal

### Pin plunger

#### CAD Data

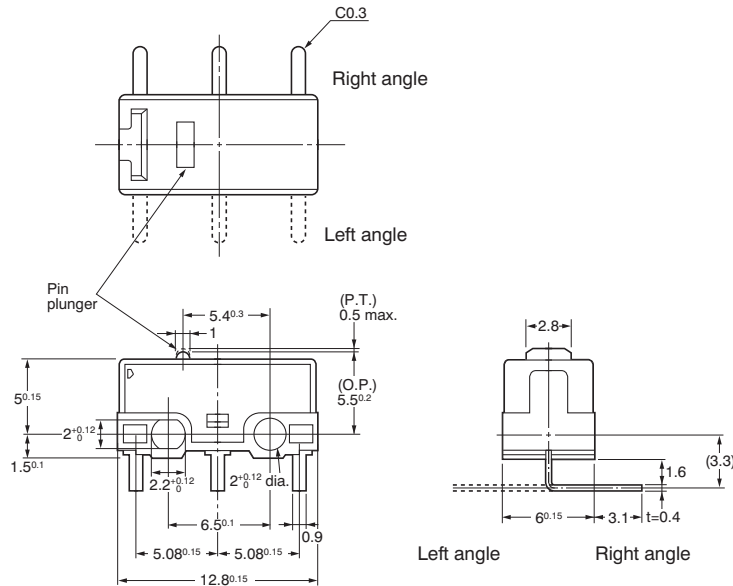

### Recommended PC board pattern (top view)



Remark: As for other actuator types, dimensions are the same as those of corresponding standard PC board terminal type.

## NOTES

### 1. Fixing

1) Use 2mm mounting screws to attach switches with Max. 0.098 N·m torque. Use of screw washers or adhesive lock is recommended.

2) When the operation object is in the free position, force should not be applied directly to the actuator or to the pin plunger. Also force should be applied to the pin plunger from vertical direction to the switch.

3) In setting the movement after operation, the over-travel should be set from 70% to 100%. Setting the movement less than 70% may cause degrading of the electrical mechanical performance.

### 2. When specifying AH1 switches,

allow  $\pm 20\%$  to the listed operating and release forces.

### 3. Soldering operation

Manual soldering should be accomplished within 3 seconds with max. 350°C iron.

Terminal portions must not be moved in min.1 minute after soldering.

Also no tensile strength of lead wires should be applied to terminals.

**4. When switching low-level circuits, AH1 low-level circuit type is recommended.**

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)