SIGN	DATE	DESCRIPTION	APPROVER
1	05/02`12	Operating temperature is changed from −45°C to +130°C to −45°C to +65°C	Guoxue
2	05/02`12	The description of material are changed	Guoxue
3	05/02`12	The dimension is change from 3.6 to 3.5	Guoxue
4	05/02`12	The dimension is change from 10.8 to 10.9	Guoxue
5	09/22`14	Add the safety certification icon & changedThe description of material	Evan
6	09/22`14	Operating temperature & reflow soldering temperature is changed	Evan
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

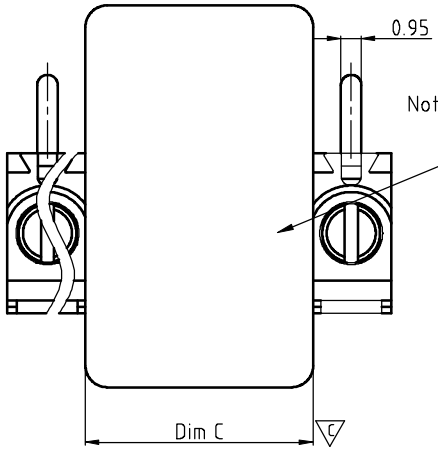

Cover

Poles	Dim C
2P	7.00
3P	10.50

DIMENSION

Dim A	NX3.50+0.20
Dim B	(N-1)X3.50

N=NUMBER OF POLES

Poles	Tolerance
2p-6p	±0.15
7p-12p	±0.25
13p-16p	±0.30

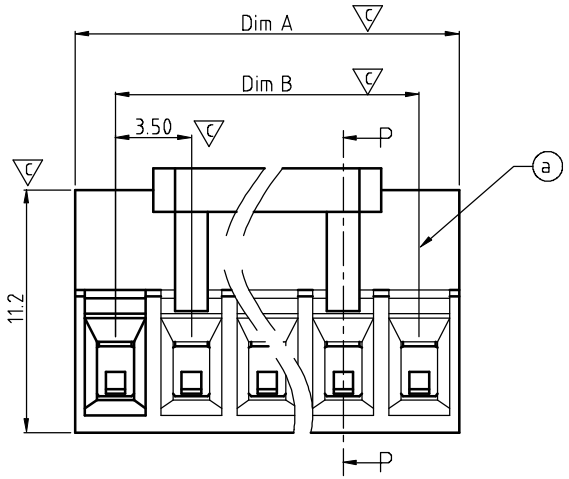

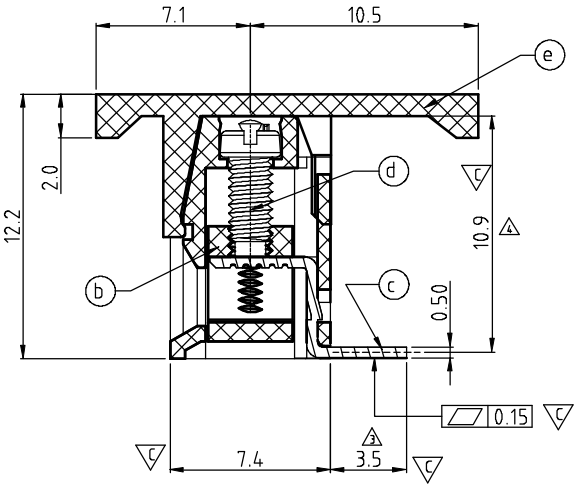

SECTION P-P

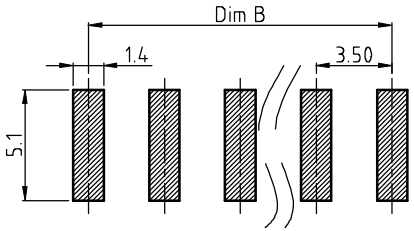

P.C.B. LAYOUT

Material:

- Item ⓐ Terminal housing: LCP (UL94V−0)
- Item ⓑ Clamp: Brass ,Ni plated
- Item ⓒ Wire guard solder pin: Brass ,Tin plated
- Item ⓓ Terminal screw: Steel Zinc plating "-" slot type
- Item ⓔ Terminal Cover: LCP (UL94V−0)

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 16-30
- Stranded wire(AWG): 16-30
- Torque: 1.7 Lb-In
- Screw: M2.0
- Wire strip length: 4-5mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -45°C to +130°C
- Reflow soldering temperature: 260°C/10 Sec max
- Safety Approval: cULus
- Critical dimension: C

TZ xx 21 x 3 xxxx G

No. of poles
02 2 POLES
03 3 POLES
... ...
16 16 POLES

0 Black (RAL9005)

RoHS compliant (lead<4%) In copper Alloy

B000:"@"Logo (Standard)
B00A:"ANYTEK"Logo
Any special item by customer request, please contact sales department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TZ-3.5mm Series 2P-16P Without pillar (With cover & tape reel)				
PART NO.	TZxx21x3xxxxG			DWG NO.	8TZ0203
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Evan 2014.09.22	Evan 2014.09.22	UNIT: mm SCALE: NONE SHEET: 01/01 REV.: D	X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru